


SUGGESTED PANEL CUTOUT


PANEL THICKNESS	X
2.5 - 3.5mm	37.0mm +0.1/-0
3.5 - 4.5mm	37.5mm +0.1/-0






▲ LENS COLOR: TRANSPARENT RED  
 ▲ MARKING: ON - OFF COLOR: WHITE

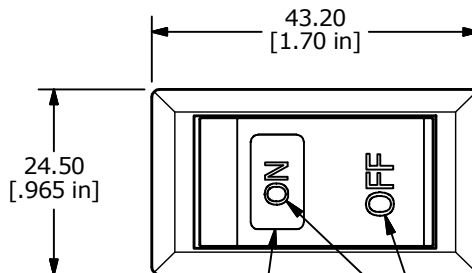

SWITCH FUNCTION	
POS. 2	POS. 1
ON	OFF
2-1	OPEN



CIRCUIT: SPDT  
 OFF - ON MAINTAINED

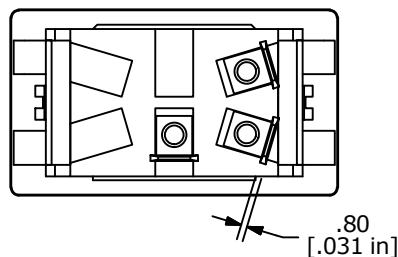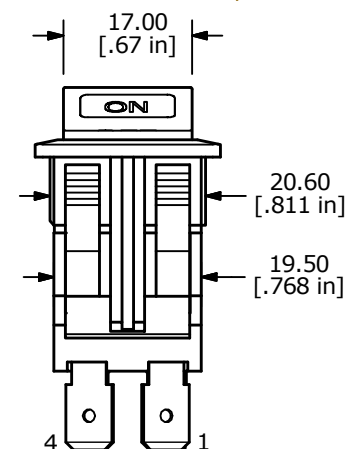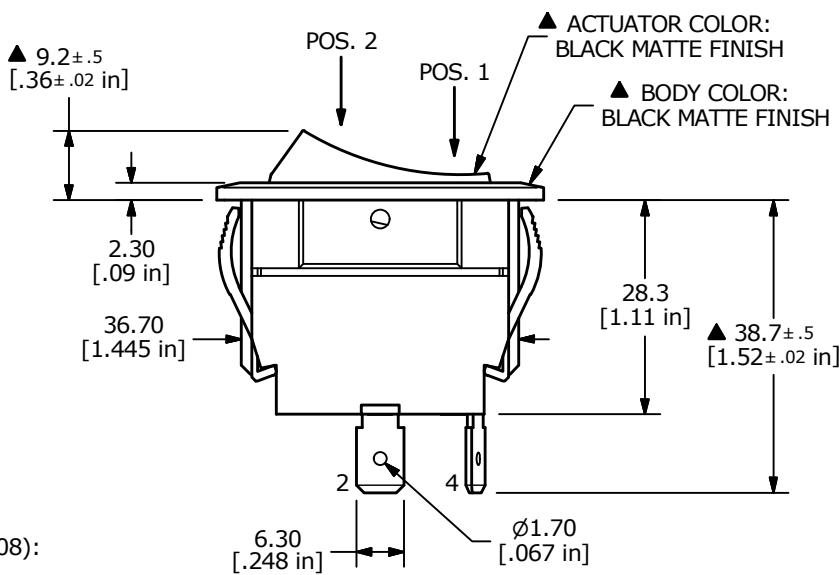

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4  
 X.XX = ± 0.25
- ▲ 3. RATINGS: ANSI/UL 508 AND CAN/CSA C22.2 NO.14 (E195908):  
 20A, 125VAC [cURus]  
 15A, 277VAC [cURus]  
 2HP, 110/250VAC [cURus]
4. CONTACT RESISTANCE: 50 mΩ MAX. @ 50VAC
5. INSULATION RESISTANCE: 800 MΩ MIN. @ 500VDC
6. OPERATING TEMPERATURE: 0°C to +55°C [cURus, CSA]  
 0°C to +55°C [VDE]
7. ELECTRICAL LIFE: 6,000 CYCLES [cURus]
8. DIELECTRIC STRENGTH: 1,500V FOR 1 MINUTE
10. INGRESS PROTECTION: IP54
11. ▲ DENOTES CRITICAL PARAMETER
- ▲ 12. NEON LAMP VOLTAGE: 125V
13. 2011/65/EU (RoHS) COMPLIANT.



C	23813	redrawn	3/21/19	MW
B	-	-	-	-
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE RVW41D1123-116				
SCALE 1:1	DATE 9/7/2002	DR CAB	DWG 34-RVW41D1123116	REV C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED