



THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25





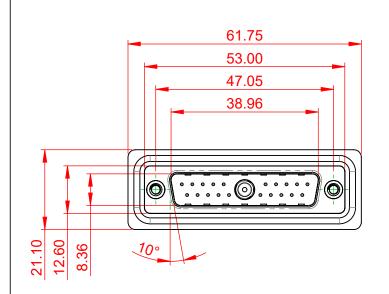





NOTES:

MATERIAL:

.XX

±0.13 .XXX ±0.05


HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, 15µ GOLD PLATING

OPERATING TEMPERATURE:

-55°C ~ 125°C


POWER CONTACT CURRENT RATING: 20A POWER CONTACT SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mΩ MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE:

SW REFERENCE NO .: 627 COMBO ASSEMBLY COMBINATION D-SUB DRAWN: C.B DATE: JAN. 01/2019 CHECKED: DATE: THESE DRAWINGS AND SPECIFICATIONS OF 4 SCALE: (IN C.A.D. 1:1) SHEET 1 EDAC INC ARE THE PROPERTY OF EDAC INC. AND TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED 627W21W1322-1NA ISSUE DRAWING NUMBER: OR USED AS THE BASIS FOR THE CANADA MANUFACTURE OR SALE OF APPARATUS 1 YOUR CONNECTION TO QUALITY & SERVICE PART NUMBER: 627W21W1322-1NA WITHOUT WRITTEN PERMISSION.

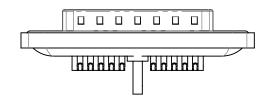




THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. 1000V AC rms

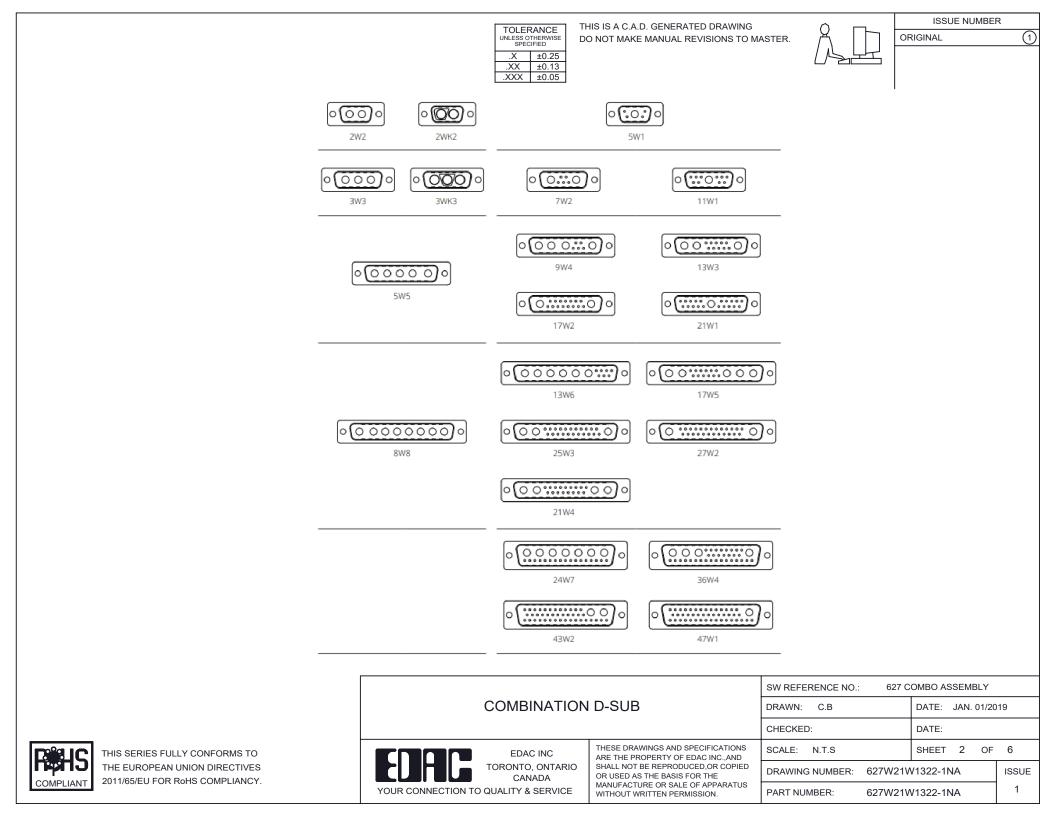

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05





3W3 / 3WK3

5W1 Male/Female


7W2 Male/Female





 $\overline{(1)}$

21W4 Male/Female



27W2 Male/Female




21W1 Male/Female

16.6

COMBINATION D-SUB		SW REFERENCE NO.: 627 COMBO ASSEMBLY			
		DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:		
EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 3 OF	4	
		DRAWING NUMBER: 627W21W1322-1NA		ISSUE	
		PART NUMBER: 627W21	W1322-1NA	1	

5W5 Male


5W5 Female



47.05


23.53

8W8 Male






11W1 Male/Female





17W2 Male/Female












CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.







25W3 Male











36W4 Female




13W3 Male

3



36W4 Male








13W6 Male



43W2 Male





17W5 Female


 .X
 ±0.25

 .XX
 ±0.13

 .XXX
 ±0.05

9W4 Female

13W3 Female



43W2 Female

47W1 Female




17W5 Male






2.77







	COMBINATION D-SUB		SW REFERENCE NO.: 627 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
CONFORMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE: N.T.S	SHEET 4 OF	4	
ION DIRECTIVES IS COMPLIANCY. YOL	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 627W21	W1322-1NA	ISSUE	
			PART NUMBER: 627W21	W1322-1NA	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.