


100





TOLERANCE UNLESS OTHERWISE SPECIFIED			
.X	±0.25		
.XX	±0.13		
.XXX	±0.10		

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

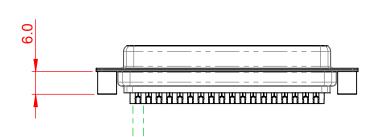

ORIGINAL 1





NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, 30µ GOLD PLATED OPERATING TEMPERATURE: -55°C to +105°C

CURRENT RATING: 3A PER CONTACT CONTACT RESISTANCE: $25m\Omega$ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

628 SERIES D-SUB CONNECTOR

	SW REFERENCE NO.: 628 ASSEMBLY		
	DRAWN: C.B	DATE: AUG. 01/2018	
	CHECKED:	DATE:	
	SCALE: 1:1	SHEET 1 OF 1	
	DDAWING NUMBER: 629 027 622 260		

DRAWING NUMBER: 628-037-622-269 ISSUE PART NUMBER: 628-037-622-269 1