

AWK-1137C Series

Industrial 802.11a/b/g/n wireless client



- > IEEE 802.11a/b/g/n compliant client
- > Comprehensive interfaces with one serial port and two Ethernet LAN ports
- > Client-based millisecond-level Turbo Roaming
- > 2x2 MIMO future-proof technology
- > Integrated robust antenna and power isolation
- > Anti-vibration design
- > Compact size for your industrial applications
- > Easy setup, easy deployment with AeroMag



Introduction

The AWK-1137C is an ideal client solution for industrial wireless mobile applications. It enables WLAN connections for both Ethernet and serial devices, and is compliant with industrial standards and approvals covering operating temperature, power input voltage, surge, ESD, and vibration. The AWK-1137C can operate on either the 2.4 or 5 GHz bands, and is backwards-compatible with existing 802.11a/b/g deployments to future-proof your wireless investments.

Industrial Ruggedness

- Integrated antenna and power isolation designed to provide 500 V insulation protection against external electrical interference
- -40 to 75°C wide operating temperature models (-T) available for smooth wireless communication in harsh environments

Mobility-Oriented Design

- Client-based Turbo Roaming for < 150 ms roaming recovery time between APs
- MIMO technology to ensure transmitting and receiving capability while on the move
- Anti-vibration performance (with reference to IEC 60068-2-6)

Easy Integration

- Semi-automatically configurable to reduce deployment cost
- Use AeroMag for error-free setup of your industrial applications' fundamental WLAN settings
- Various communication interfaces for connecting to different types of devices
- One-to-many NAT to simplify your machine setup

Specifications

WLAN Interface

Standards:

- IEEE 802.11a/b/g/n for Wireless LAN
- IEEE 802.11i for Wireless Security
- IEEE 802.3 for 10BaseT
- IEEE 802.3u for 100BaseT(X)

Spread Spectrum and Modulation (typical):

- DSSS with DBPSK, DQPSK, CCK
- OFDM with BPSK, QPSK, 16QAM, 64QAM
- 802.11b: CCK @ 11/5.5 Mbps, DQPSK @ 2 Mbps, DBPSK @ 1 Mbps
- 802.11a/g: 64QAM @ 54/48 Mbps, 16QAM @ 36/24 Mbps, QPSK @ 18/12 Mbps, BPSK @ 9/6 Mbps
- 802.11n: 64QAM @ 300 Mbps to BPSK @ 6.5 Mbps (multiple rates supported)

Operating Channels (central frequency):

US:

- 2.412 to 2.462 GHz (11 channels)
- 5.180 to 5.240 GHz (4 channels)
- 5.745 to 5.825 GHz (5 channels)
- 5.260 to 5.320 GHz (4 channels)
- 5.500 to 5.700 GHz (11 channels)

EU:

- 2.412 to 2.472 GHz (13 channels)
- 5.180 to 5.240 GHz (4 channels)
- 5.260 to 5.320 GHz (4 channels)
- 5.500 to 5.700 GHz (11 channels)

JP:

- 2.412 to 2.484 GHz (14 channels, DSSS)
- 5.180 to 5.240 GHz (4 channels)
- 5.260 to 5.320 GHz (4 channels)
- 5.500 to 5.700 GHz (11 channels)

Security:

- SSID broadcast enable/disable
- Firewall for MAC/IP/Protocol/Port-based filtering
- 64-bit and 128-bit WEP encryption, WPA/WPA2-Personal and Enterprise (IEEE 802.1X/RADIUS, TKIP, and AES)

Transmission Rates:

- 802.11b: 1, 2, 5.5, 11 Mbps
- 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
- 802.11n: 6.5 to 300 Mbps (multiple rates supported)

TX Transmit Power:

- 802.11b:
 - Typ. 26±1.5 dBm @ 1 Mbps, Typ. 26±1.5 dBm @ 2 Mbps
 - Typ. 26±1.5 dBm @ 5.5 Mbps, Typ. 25±1.5 dBm @ 11 Mbps
- 802.11g:
 - Typ. 23±1.5 dBm @ 6 to 24 Mbps, Typ. 22±1.5 dBm @ 36 Mbps
 - Typ. 20±1.5 dBm @ 48 Mbps, Typ. 19±1.5 dBm @ 54 Mbps
- 802.11n (2.4 GHz):
 - Typ. 23±1.5 dBm @ MCS0/8 20 MHz
 - Typ. 17±1.5 dBm @ MCS7/15 20 MHz
 - Typ. 23±1.5 dBm @ MCS0/8 40 MHz
 - Typ. 17±1.5 dBm @ MCS7/15 40 MHz
- 802.11a:
 - Typ. 23±1.5 dBm @ 6 to 24 Mbps
 - Typ. 21±1.5 dBm @ 36 Mbps
 - Typ. 20±1.5 dBm @ 48 Mbps,
 - Typ. 18±1.5 dBm @ 54 Mbps
- 802.11n (5 GHz):
 - Typ. 23±1.5 dBm @ MCS0/8 20 MHz
 - Typ. 18±1.5 dBm @ MCS7/15 20 MHz
 - Typ. 23±1.5 dBm @ MCS0/8 40 MHz,
 - Typ. 18±1.5 dBm @ MCS7/15 40 MHz

Note: Based on regional regulations, the maximum transmission power allowed on the UNII bands is restricted in the firmware, as indicated below:

| | US | EU | JP |
|-----------------|--------|--------|--------|
| 2.4 GHz | 26 dBm | 18 dBm | 18 dBm |
| 5 GHz (UNII-1) | 23 dBm | 23 dBm | 23 dBm |
| 5 GHz (UNII-2) | 23 dBm | 23 dBm | 23 dBm |
| 5 GHz (UNII-2e) | 23 dBm | 23 dBm | 23 dBm |
| 5 GHz (UNII-3) | 23 dBm | – | – |

RX Receive Sensitivity:

- 802.11b:
 - 89 dBm @ 1 Mbps, -89 dBm @ 2 Mbps
 - 89 dBm @ 5.5 Mbps, -88 dBm @ 11 Mbps
- 802.11g:
 - 88 dBm @ 6 Mbps, -88 dBm @ 9 Mbps
 - 88 dBm @ 12 Mbps, -87 dBm @ 18 Mbps
 - 84 dBm @ 24 Mbps, -81 dBm @ 36 Mbps
 - 77 dBm @ 48 Mbps, -75 dBm @ 54 Mbps
- 802.11n (2.4 GHz):
 - 70 dBm @ MCS7 20 MHz, -70 dBm @ MCS15 20 MHz
 - 64 dBm @ MCS7 40 MHz, -65 dBm @ MCS15 40 MHz
- 802.11a:
 - 90 dBm @ 6 Mbps, -88 dBm @ 9 Mbps
 - 87 dBm @ 12 Mbps, -85 dBm @ 18 Mbps
 - 81 dBm @ 24 Mbps, -78 dBm @ 36 Mbps
 - 74 dBm @ 48 Mbps, -73 dBm @ 54 Mbps
- 802.11n (5 GHz):
 - 69 dBm @ MCS7 20 MHz, -70 dBm @ MCS15 20 MHz
 - 64 dBm @ MCS7 40 MHz, -66 dBm @ MCS15 40 MHz

Protocol Support

General Protocols: Proxy ARP, DNS, HTTP, HTTPS, IP, ICMP, SNMP, TCP, UDP, RADIUS, DHCP, VLAN

Interface

Default Antennas: 2 dual-band omni-directional antennas, 2 dBi, RP-SMA (male)

Connector for External Antennas: RP-SMA (female)

LAN Ports: 2, RJ45, 10/100/1000BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection

Serial Port: 1, RS232/422/485, DB9 male connector

Reset: Present

LED Indicators: SYS, WLAN, LAN1, LAN2, Serial

Serial Communication Parameters

- Data Bits:** 5, 6, 7, 8
- Stop Bits:** 1, 1.5, 2
- Parity:** None, Even, Odd, Space, Mark
- Flow Control:** RTS/CTS, XON/XOFF
- Baudrate:** 75 bps to 921.6 kbps
- Serial Data Log:** 256 KB

Serial Signals

- RS-232:** TxD, RxD, RTS, CTS, DCD, GND
- RS-422:** Tx+, Tx-, Rx+, Rx-, GND
- RS-485-4w:** Tx+, Tx-, Rx+, Rx-, GND
- RS-485-2w:** Data+, Data-, GND

Management

Serial Operation Modes: Real COM, RCF2217, TCP Server, TCP Client, UDP

Device Management: Wireless Search Utility, MXconfig, SNMP

Network Monitoring: MXview

Physical Characteristics

- Housing:** Metal casing for high EMC-levels; provides IP30 protection
- Weight:** 470 g (1.03 lb)
- Dimensions:** 77.1 x 115.5 x 26 mm (3.035 x 4.55 x 1.024 in)
- Installation:** DIN-rail mounting (standard), wall mounting (with optional kit)

Environmental Limits

- Operating Temperature:**
 - Standard Models: 0 to 60°C (32 to 140°F)
 - Wide Temp. Models: -40 to 75°C (-40 to 167°F)
- Storage Temperature:** -40 to 85°C (-40 to 185°F)
- Ambient Relative Humidity:** 5% to 95% (non-condensing)

Power Requirements

- Input Voltage:** 9 to 30 VDC, redundant dual DC power inputs
- Connector:** 3-pin removable terminal block, 500 V insulation
- Power Consumption:** 11.7 W
- Reverse Polarity Protection:** Present

Standards and Certifications

- Safety:** UL 60950-1
- EMC:** EN 55032/55024, EN 61000-6-2/6-4
- EMI:** FCC Part 15B
- EMS:**
 - IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV
 - IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m
 - IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV
 - IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV
 - IEC 61000-4-6 CS: 10 V
 - IEC 61000-4-8
- Radio:** FCC ID SLE-1137C, MIC, RED, NCC, KC, RCM, ANATEL, EAC, WPC
- Vehicle:** E-Mark E1

Note: Please check Moxa's website for the most up-to-date certification status.

MTBF (mean time between failures)


- Time:** 1,125,942 hrs
- Standard:** Telcordia SR332

Warranty

- Warranty Period:** 5 years
- Details:** See www.moxa.com/warranty

Dimensions

Unit: mm (inch)

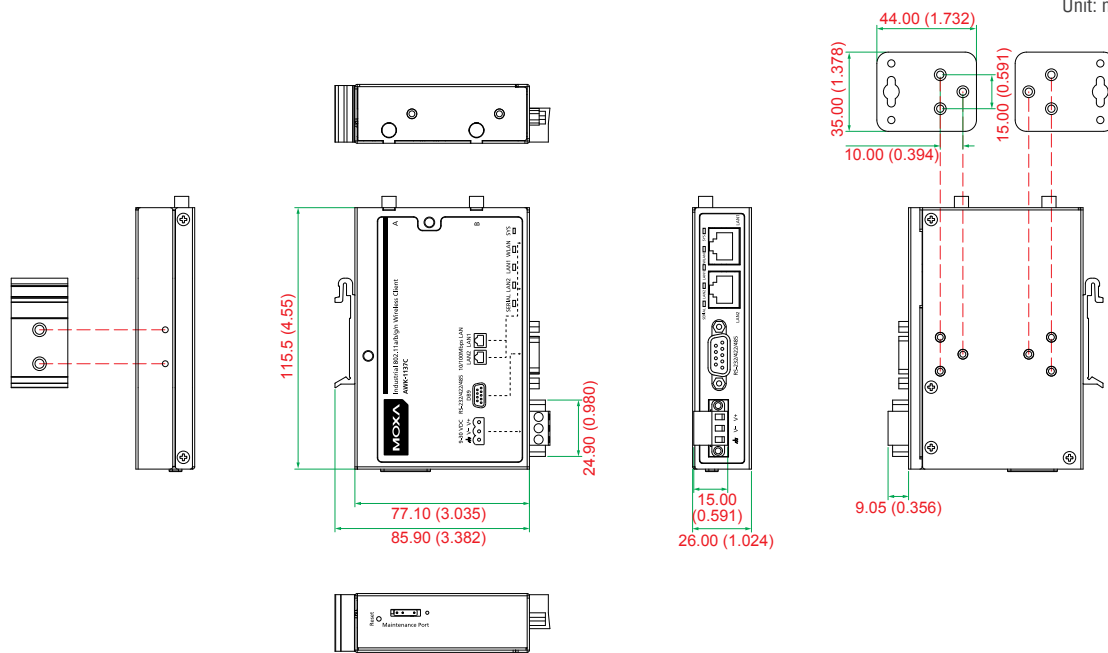

Ordering Information

Available Models

- AWK-1137C-US:** Industrial 802.11a/b/g/n wireless serial/Ethernet client, US band, 0 to 60°C
- AWK-1137C-US-T:** Industrial 802.11a/b/g/n wireless serial/Ethernet client, US band, -40 to 75°C
- AWK-1137C-EU:** Industrial 802.11a/b/g/n wireless serial/Ethernet client, EU band, 0 to 60°C
- AWK-1137C-EU-T:** Industrial 802.11a/b/g/n wireless serial/Ethernet Client, EU band, -40 to 75°C
- AWK-1137C-JP:** Industrial 802.11a/b/g/n wireless serial/Ethernet client, JP band, 0 to 60°C
- AWK-1137C-JP-T:** Industrial 802.11a/b/g/n wireless serial/Ethernet client, JP band, -40 to 75°C

Note: Please visit Moxa's website for a complete list of optional wireless accessories and antennas available for Moxa's wireless products.

Optional Accessories (can be purchased separately)

WK-35-01: Wall-mounting kit with 2 plates and 6 screws

Package Checklist

- AWK-1137c wireless serial Ethernet/client
- 2 x 2.4/5 GHz antennas: ANT-WDB-ARM-0202
- DIN-rail kit
- Quick installation guide (printed)
- Warranty card