



AMEL6-VZ



The new AMEL6-VZ is a brand-new AC/DC converter that offers much greater cost effectiveness due to material normalization and production automation also leading to improved reliability and performance. Offering a commercial input voltage range of 85-264VAC and an output voltage range from 3.3-24V, this series will offer many benefits to your new system design.

This new series offers great operating temperatures, from -40°C to 70°C with full power up to 55°C. It also features an isolation of 4000VAC for improved reliability and system safety. Furthermore, a higher MTBF of 300,000h, output short circuit protection (OSCP), output over-current protection (OCP) and an output over-voltage protection (OVP) come standard with the series.


The AMEL6-VZ is perfect for street lighting controls, grid power, LED, instrumentation, industrial controls, communication and civil applications.

Features




- Universal Input: 85 - 264VAC/100 - 370VDC
- Operating Temp: -40 °C to +70 °C
- High isolation voltage: 4000VAC
- Output short circuit protection
- Over-current protection
- Over-voltage protection


Summary

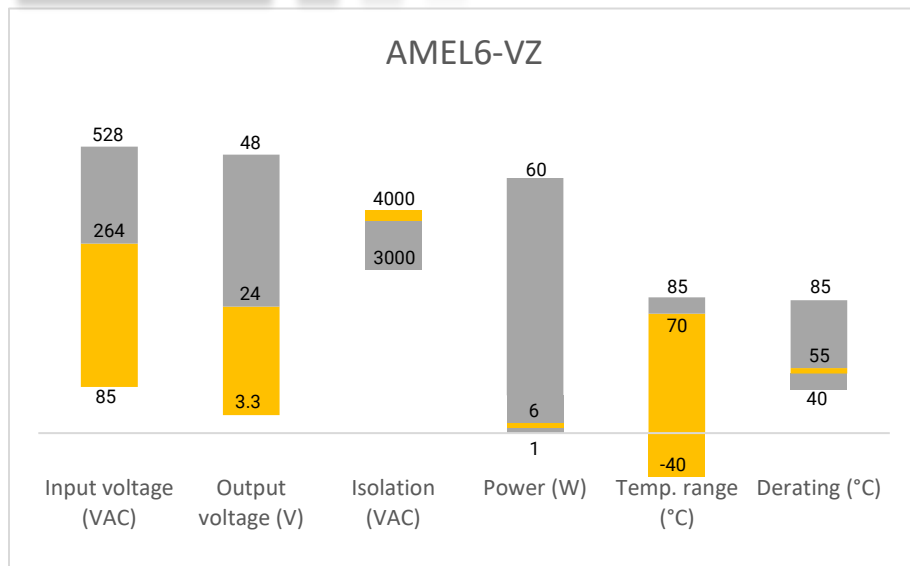

Training

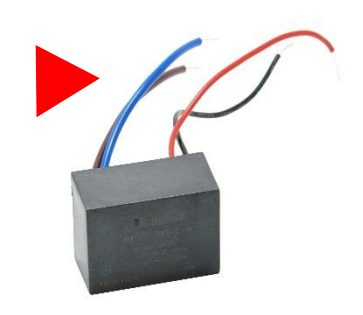

Product Training Video
(click to open)

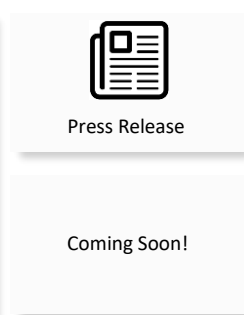

Application Notes

Applications



Power Grid



Industrial



Telecom



Instrumentation

Models & Specifications

Single Output

Model	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Output Voltage (V)	Output Current max (A)	Maximum capacitive Load (μ F)	Efficiency (%) 230VAC
AMEL6-3.3SVZ	85-264/47-63	100-370	3.3	1.25	4000	70
AMEL6-5SVZ	85-264/47-63	100-370	5	1.20	4000	76
AMEL6-9SVZ	85-264/47-63	100-370	9	0.66	1000	74
AMEL6-12SVZ	85-264/47-63	100-370	12	0.50	820	77
AMEL6-15SVZ	85-264/47-63	100-370	15	0.40	820	77
AMEL6-24SVZ	85-264/47-63	100-370	24	0.25	330	80

Note: Add suffix “-ST” for optional screw terminal bottom plate or “-STD” for optional DIN Rail screw terminal bottom plate.

Input Specifications

Parameters	Conditions	Minimum	Typical	Maximum	Units
Current (full load)	115 VAC			150	mA
	230 VAC			100	mA
Inrush current <2ms (cold start)	115 VAC		10		A
	230 VAC		20		A
External fuse	Recommended slow blow type		1		A
Input Voltage	VAC	85		264	V
	VDC	100		370	V

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	3.3V output	± 3		%
	Others	± 2		%
Line regulation	Full Load	± 0.5		%
Load regulation	0%-100% load	± 1		%
Ripple & Noise*	20MHz Bandwidth, others	50	100	mV p-p
Hold-up time (minimum)	115VAC	8		ms
	230VAC	60		ms

*Ripple and Noise are measured at 20MHz bandwidth by using the referenced Application circuit.

Isolation Specifications



Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	60 sec	4000		VAC

General Specifications				
Parameters	Conditions	Typical	Maximum	Units
Switching frequency		100		KHz
Protection class	Class II			
Over Current protection	Auto recovery	≥110		% of Iout
Over voltage protection	Zener diode clamp			
Short circuit protection	Continuous, hiccup, Auto recovery			
Operating temperature	See derating curve	-40 to +70°C		°C
Storage temperature		-40 to +105		°C
Temperature coefficient		±0.02		% /°C
Cooling	Free air convection			
Case material	Plastic (flammability to UL 94V-0)			
Weight	PCB mountable model:	31		g
	With optional -ST mounting plate:	52		
	With optional -STD mounting plate:	70		
Dimensions (L x W x H)	PCB mountable model:	2 x 1 x 0.60 (50.8 x 25.4 x 15.36mm)		
	With optional -ST mounting plate:	2.99 x 1.24 x 0.95 (76.00 x 31.50 x 24.16mm)		
	With optional -STD mounting plate:	2.99 x 1.24 x 1.13 (76.00 x 31.50 x 28.76mm)		
MTBF	> 300,000 hrs (MIL-HDBK -217F, t _a =+25°C)/Full Load			


NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

Safety Specifications		
Parameters		
Agency approvals	cULus	
Standards	IEC/EN/UL 62368-1, IEC/EN/UL 60950-1	
	EMI - Conducted and radiated emission	EN55032, class B
	Electrostatic Discharge Immunity	IEC 61000-4-2, Contact: ±6KV/Air: ±8KV, Criteria B
	RF, Electromagnetic Field Immunity	IEC 61000-4-3, 10V/m, Criteria A
	Electrical Fast Transient/Burst Immunity	IEC 61000-4-4, ±2KV, Criteria B
		IEC 61000-4-4, ±4KV, Criteria B with EMC recommended circuit
	Surge Immunity	IEC 61000-4-5, ±1KV Criteria B
		IEC 61000-4-5, ±2KV, Criteria B with EMC recommended circuit
	RF, Conducted Disturbance Immunity	IEC 61000-4-6, 10Vrms, Criteria A
	Voltage dips, Short Interruptions Immunity	IEC 61000-4-11, 0-70%, Criteria B

Derating

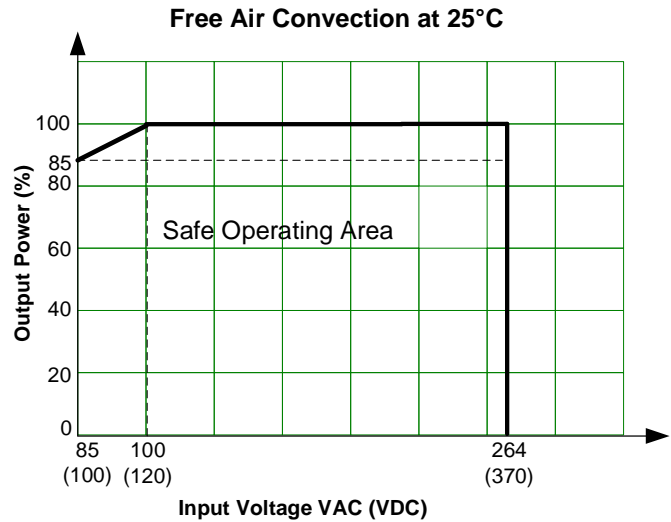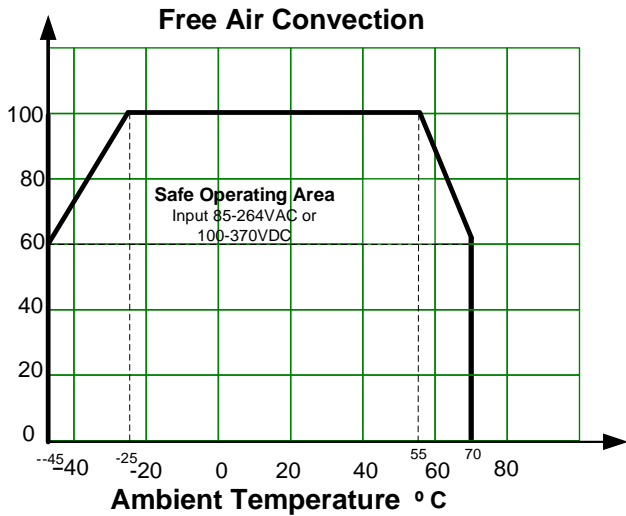


Dimensions

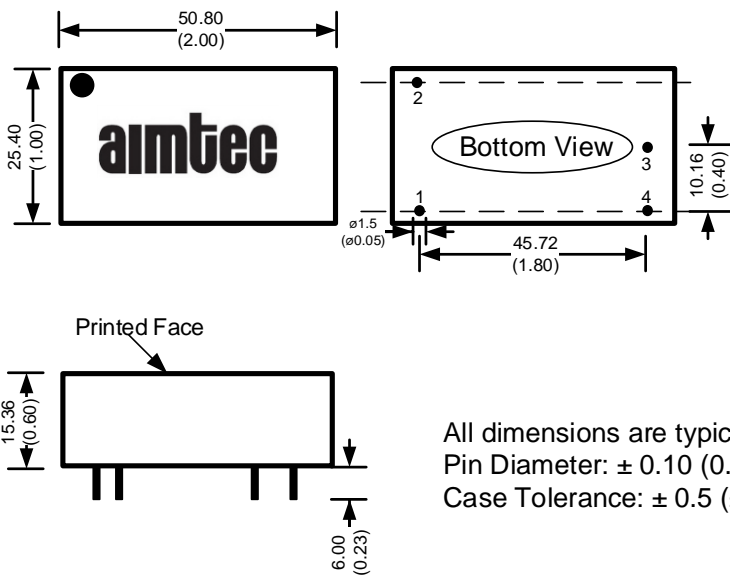

Pin Output Specifications	
Pin	Single
1	AC Input (L)
2	AC Input (N)
3	-V Output
4	+V Output


All dimensions are typical: millimeters (inches)
 Pin Diameter: ± 0.10 (0.02 ± 0.004)
 Case Tolerance: ± 0.5 (± 0.02)

With optional -ST bottom plate

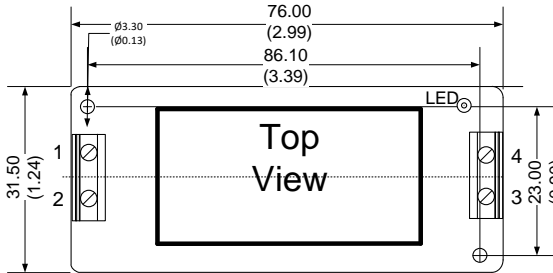


Dimensions: mm (inch)
Case Tolerance: ± 1.00 (0.04)
Holding holes tolerance: ± 0.20 (0.01)
Wire gauge: 24-12AWG

Pin Output Specifications	
Pin	Single
1	AC Input (L)
2	AC Input (N)
3	-V Output
4	+V Output

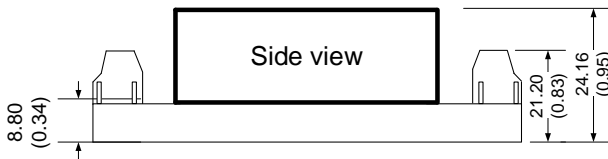


With optional -STD bottom plate

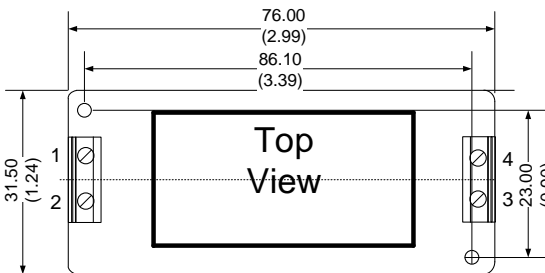


Dimensions: mm (inch)
Case Tolerance: ± 1.00 (0.04)
Holding holes tolerance: ± 0.20 (0.01)
Wire gauge: 24-12AWG

Pin Output Specifications	
Pin	Single
1	AC Input (L)
2	AC Input (N)
3	-V Output
4	+V Output

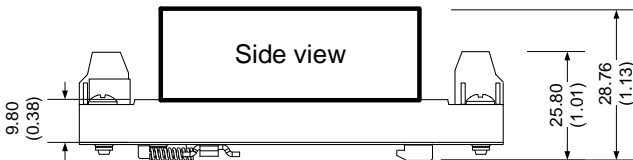


Typical Application Circuit

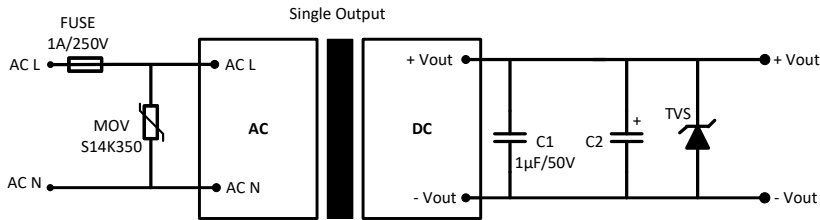

Pin Output Specifications		
Model	C2	TVS
3.3 & 5 Vout	220 µF	7V
9Vout	100 µF	12V
12 & 15 Vout	100 µF	20V
24 Vout	47 µF	30V

EMC Recommended Circuit

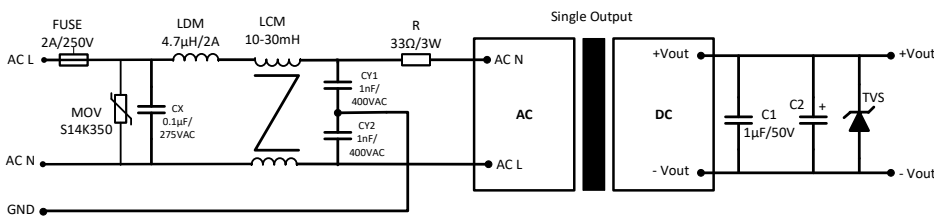

Model	C2	TVS
3.3 & 5 Vout	220 µF	7V
9Vout	100 µF	12V
12 & 15 Vout	100 µF	20V
24 Vout	47 µF	30V

NOTE: **1.** Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.