
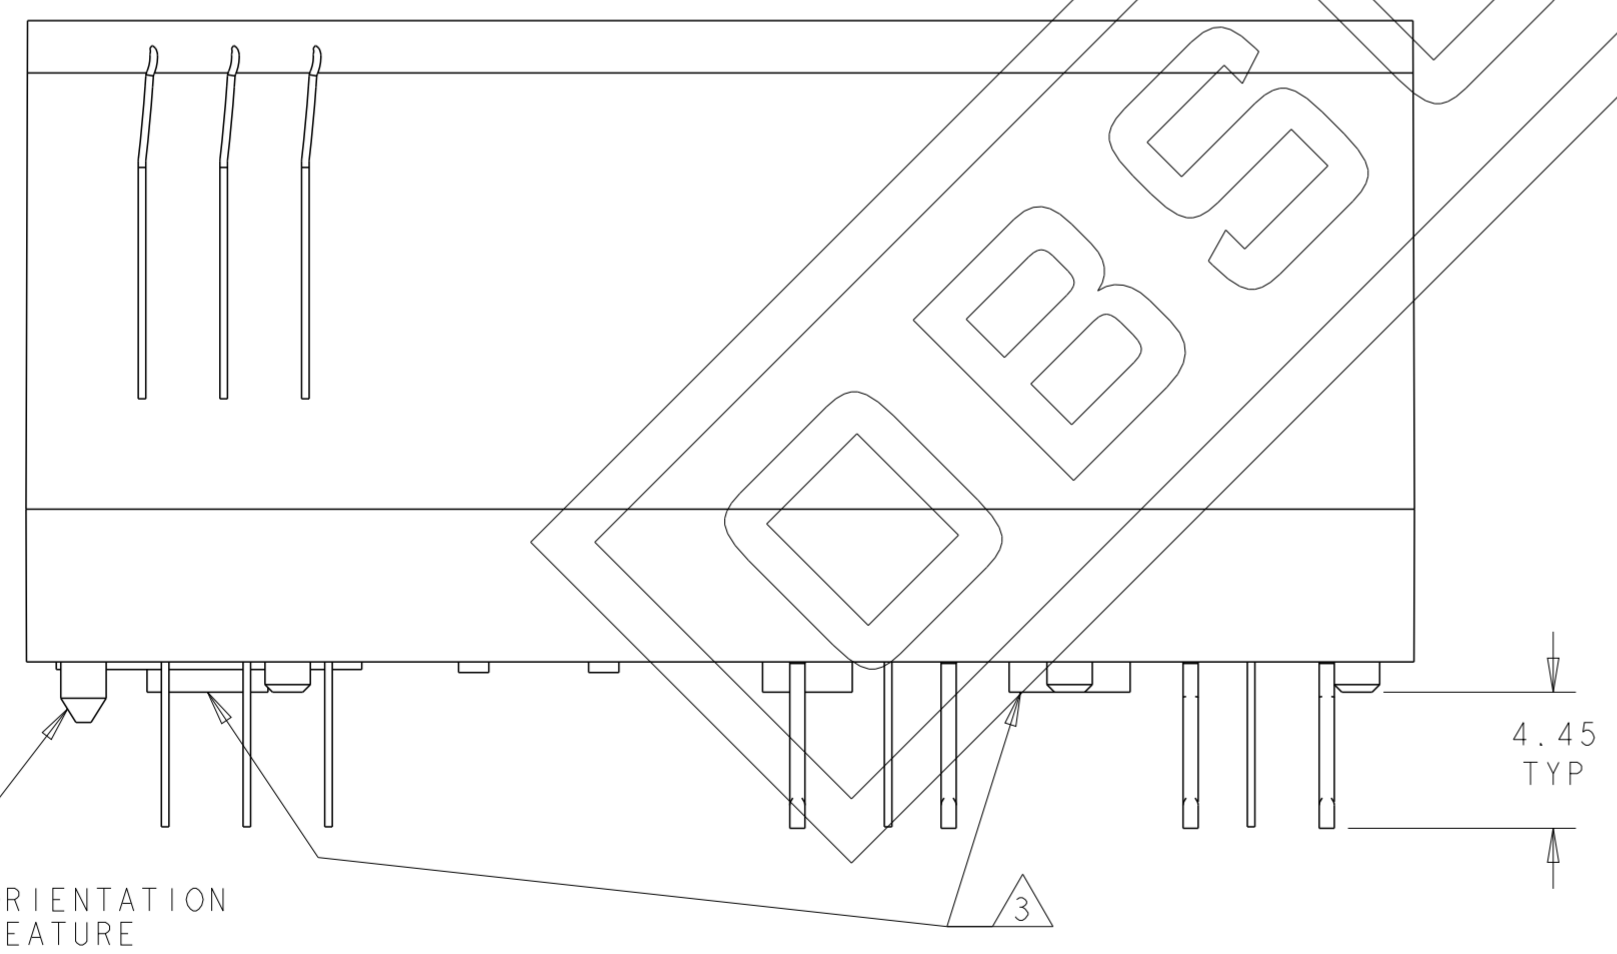


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		E		REV PER ECR-12-016995	04NOV2012	OL	SZ
		F		OBSOLETE PART -1	10MAY2021	CZ	SH
		G		REV PER ECR-22-125773	23JAN2022	CZ	SH

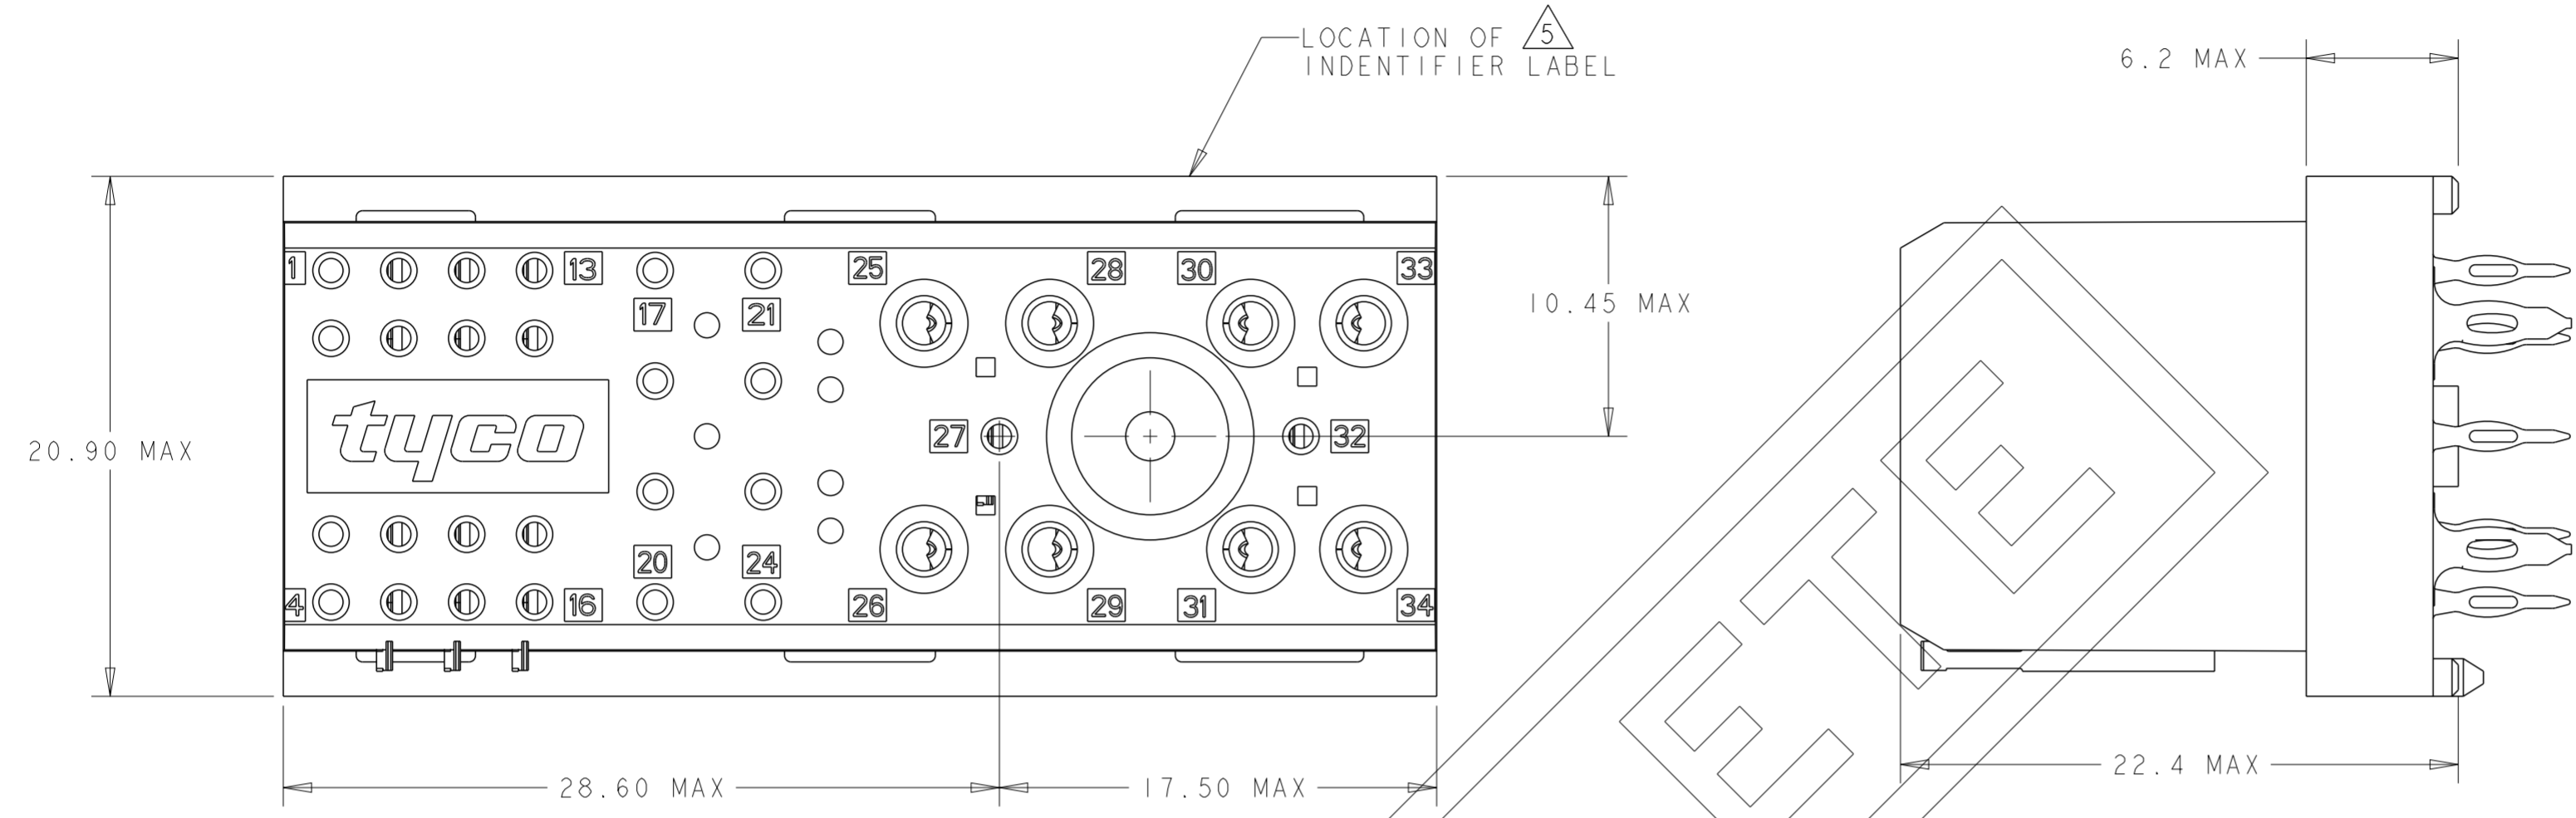


OBSOLETE

OBSOLETE	9	1666503-2
OBSOLETE	2	1766503-1
	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. TREA 03MAY2006	TE Connectivity	
DIMENSIONS: mm		CHK J. McCLELLAN 03MAY2006		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD - 03MAY2006		
0 PLC ± 1 PLC ± 2 PLC ±0.50 3 PLC ±0.250 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-2216 APPLICATION SPEC 114-13156 WEIGHT -		
MATERIAL		NAME	CONNECTOR ASSEMBLY, VERTICAL, BACKPLANE, COMPLIANT PRESS FIT, ADVANCED ICA, SELECT LOAD	
1 - 2 9 -		SIZE	CAGE CODE	DRAWING NO
		A20779	C-1766503	RESTRICTED TO
		Customer Drawing	SCALE 4:1	SHEET 1 OF 2 REV G

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1			

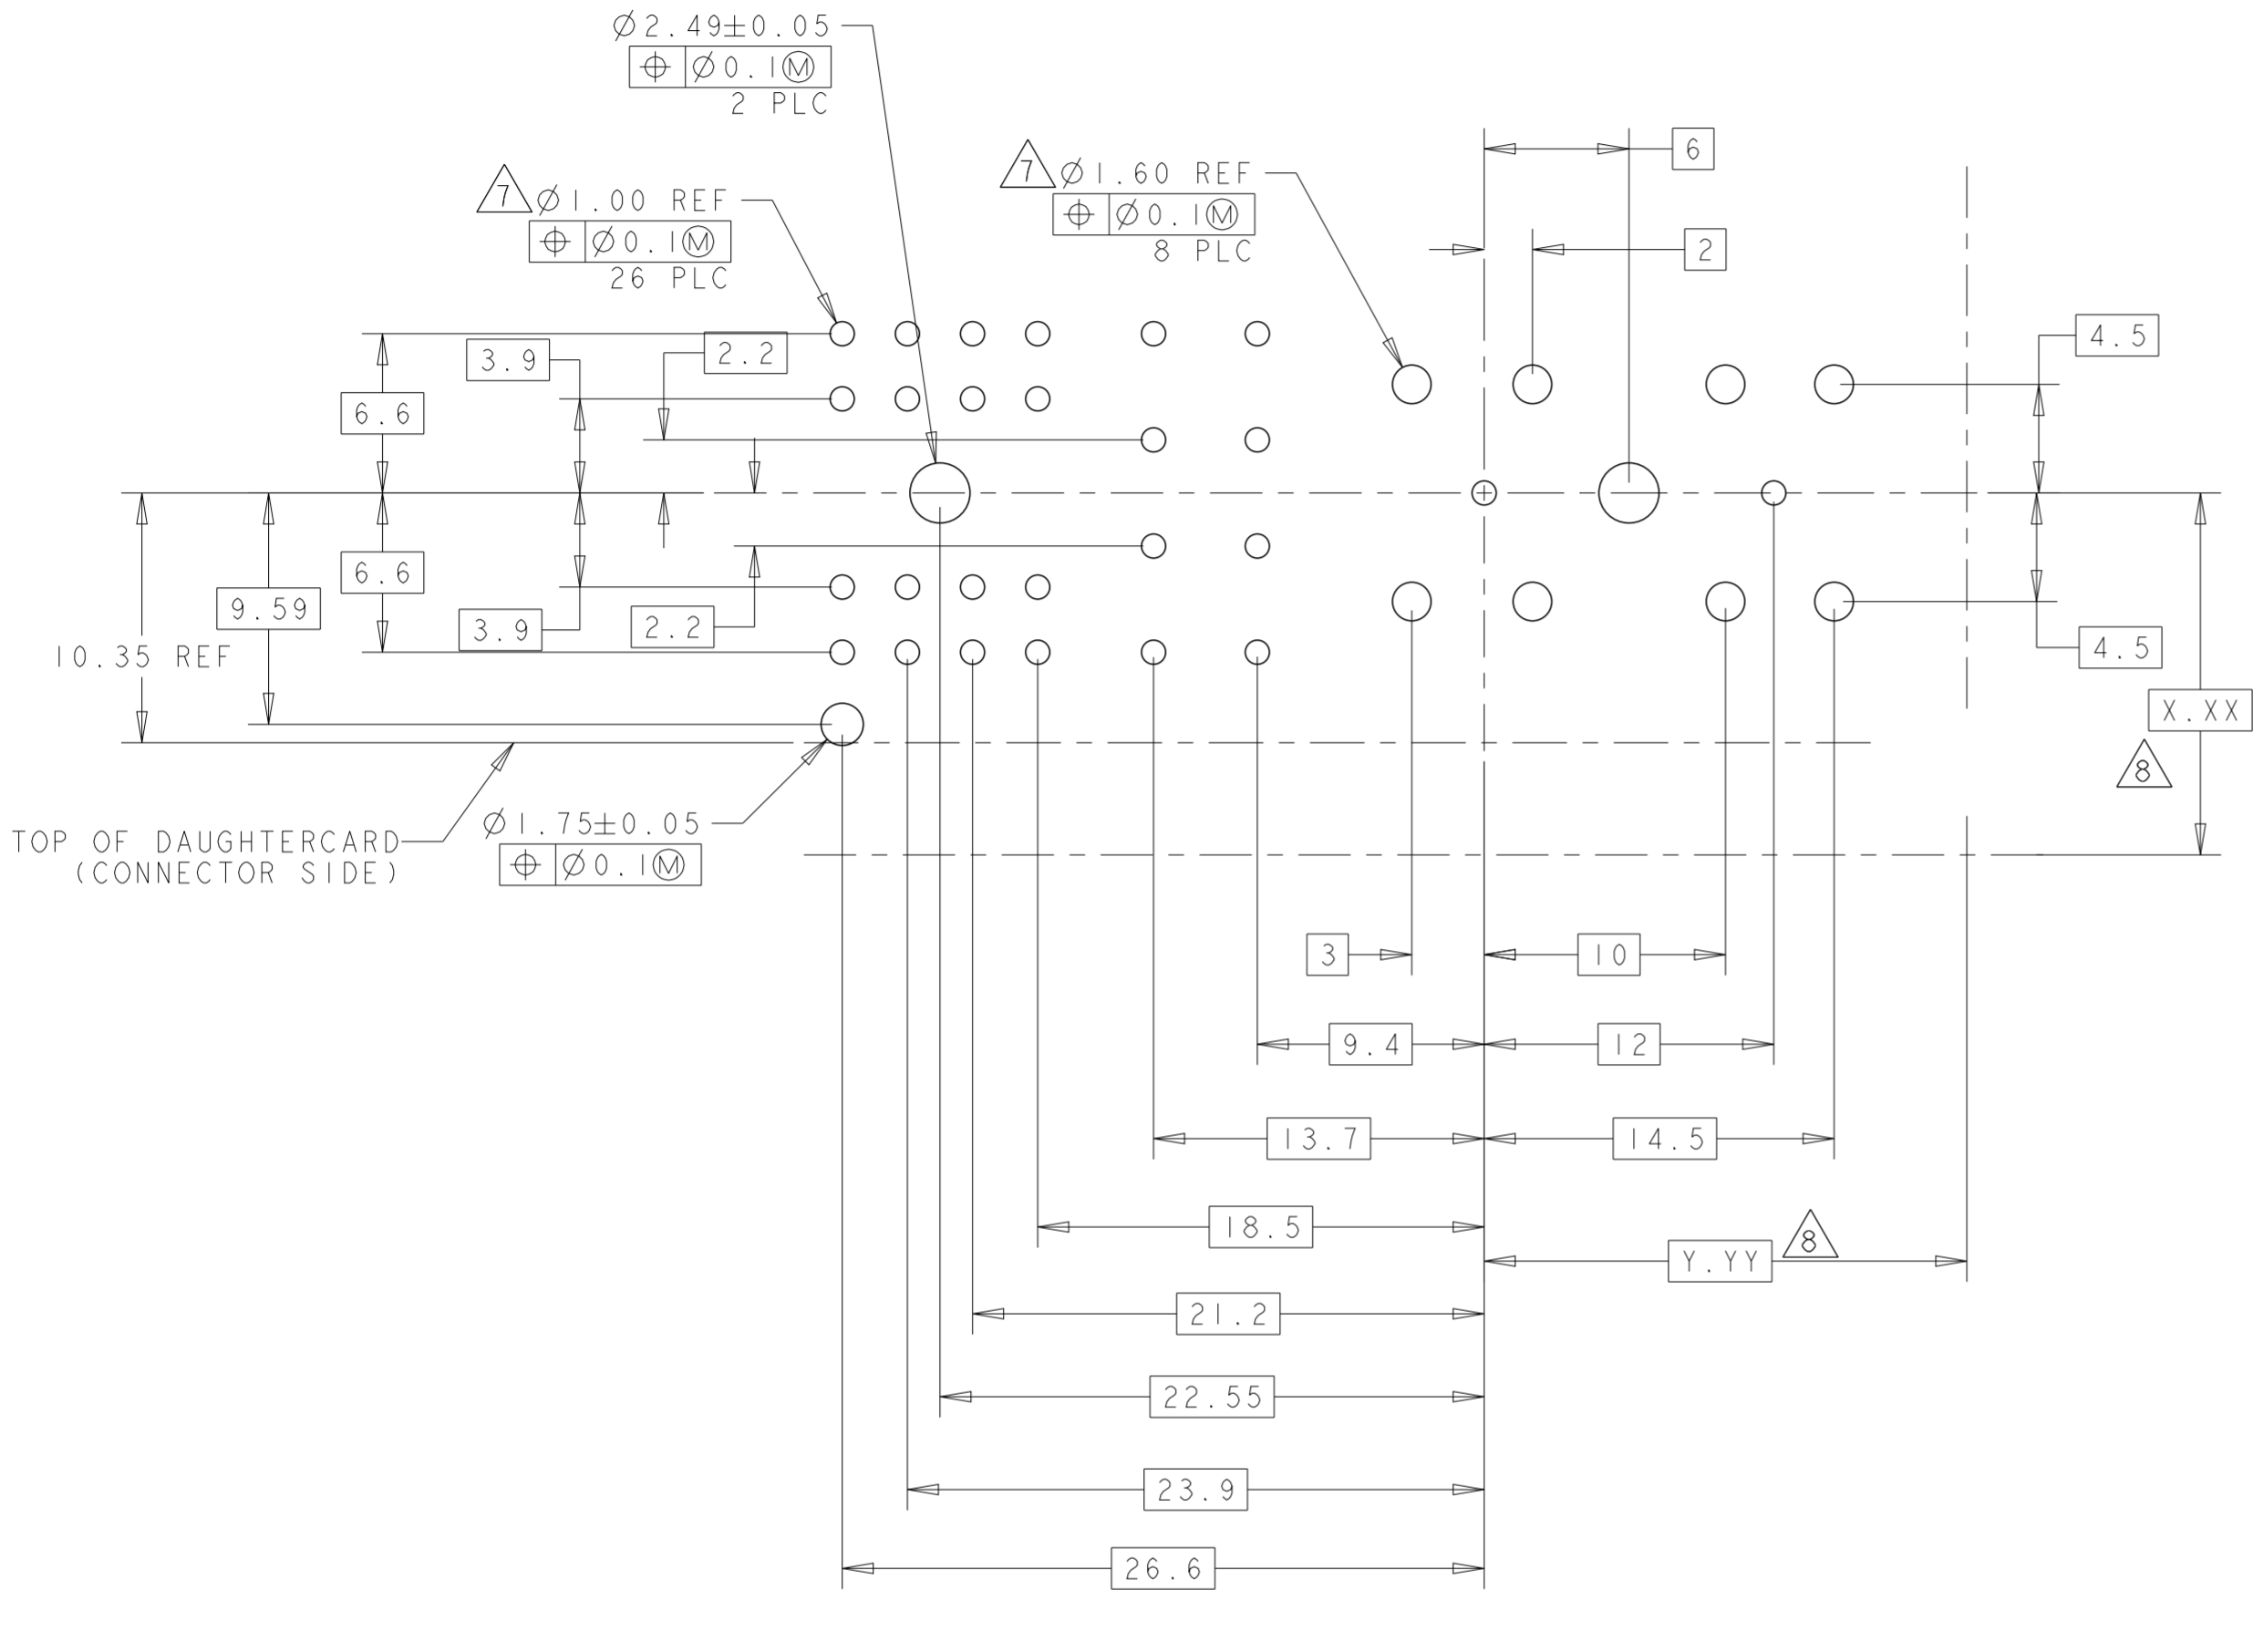

PCB LAYOUT  
 VIEWED FROM CONNECTOR SIDE  
 SCALE 7:2

- 1 MATERIALS:  
 INSULATORS: THERMOPLASTIC, GLASS REINFORCED  
 COLOR-GRAY, UL94V-0, FLAMMABILITY RATED.  
 SIGNAL PINS: COPPER ALLOY.  
 POWER CONTACTS: HIGH CONDUCTIVITY  
 COPPER ALLOY.
- 2 FINISHES:  
 CONTACTS MATING ZONE: GOLD PLATE, 0.76µm MIN THK.  
 OVER NICKEL 1.27µm MIN THK.  
 SOLDER TAILS: TIN PLATED, 1.27µm MIN THK.  
 OVER NICKEL 1.27µm MIN THK.
- 3 OPTIONAL MOUNTING SCREWS (Ø2.0mm x 5.0mm DP) FOR USE WITH  
 SELF TAPPING SCREWS (CUSTOMER SUPPLIED).
- 4 POSITIONS 5-16 AND 25-34 LOADED.
- 5 ITEMS PROVIDED TO THIS SPECIFICATION TO BE PERMANENTLY  
 IDENTIFIED PER THE FOLLOWING IDENTIFIER LABEL:  
 YEAR WEEK



6. GENERAL INFORMATION:

TYPE DESIGNATION	TYCO PART NO	SIZE NO	CONTACT QTY	MATING PIN DIA
ZP-A-030F-PI-2B	1766501-1	16 22	8 14	Ø1.60 Ø0.76

- 7 MANUFACTURING TOLERANCE FOR:  
 Ø1.60<sup>+0.09</sup>/<sub>-0.06</sub> FINISHED HOLE WITH Sn PLATING:  
 DRILLED HOLE = Ø1.75±0.025  
 COPPER PLATING = 0.025 MIN  
 Sn PLATING = 0.008 MIN  
  
 Ø1.00<sup>+0.09</sup>/<sub>-0.06</sub> FINISHED HOLE WITH Sn PLATING:  
 DRILLED HOLE = Ø1.15±0.025  
 COPPER PLATING = 0.025 MIN  
 Sn PLATING = 0.008 MIN

8 DATUMS AND BASIC DIMENSIONS TO BE ESTABLISHED BY CUSTOMER.

- 9 FINISHES:  
 CONTACTS MATING ZONE: GOLD PLATE, 0.76µm MIN THK.  
 OVER NICKEL 1.27µm MIN THK.  
 SOLDER TAILS: TIN-LEAD PLATED, 1.27µm MIN THK.  
 OVER NICKEL 1.27µm MIN THK.

10. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL  
 REFERENCE: GR-1217-COR, ISSUE 1, NOVEMBER 1995

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. TREA	03MAY2006	<b>STE</b> TE Connectivity
DIMENSIONS: mm		CHK J. McCLELLAN	03MAY2006	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	03MAY2006	
0 PLC ± 1 PLC ± 2 PLC ±0.50 3 PLC ±0.250 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-2216	NAME CONNECTOR ASSEMBLY, VERTICAL, BACKPLANE, COMPLIANT PRESS FIT, ADVANCED ICA, SELECT LOAD	
MATERIAL	-	APVD	114-13156	SIZE A2
		WEIGHT	-	CAGE CODE 0779
		Customer Drawing		DRAWING NO C-1766503
		SCALE 4:1		RESTRICTED TO -
		SHEET 2 OF 2		REV G