### CUSTOMER PRODUCT SPECIFICATION SHEET

# RoHS Complian:

## CAB431RF: I-PEX MHF 5L PLUG + SMA STRAIGHT BULKHEAD JACK + 1.13MM CABLE, 6GHz

#### SPECIFICATIONS :


- 1. I-PEX MHF 5L PLUG. P/N:20668-001R-13.
- 2. 1.13MM COAXIAL CABLE, COLOR: GRAY.
- 3. SMA STRAIGHT BULKHEAD JACK, P/N: RFCT-SMA047-F13.


### NOTES:


- 1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY, IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION.
- 2. FIXED ORIENTATION IS SUGGESTED FOR CABLE LENGTH 50MM TO 100MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1. F2. ETC)
- 3. CONTACT GRADCONN IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN.
- 4. WORKING FREQUENCY RANGE: DC-6GHz.
- 5. OPERATING TEMPERATURE: -40°C~+85°C.
- 6. IMPEDANCE: 50 Ohm.

### USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:

- (i) HANDLE WITH CARE.
- (ii) DO NOT TWIST: APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
- (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS

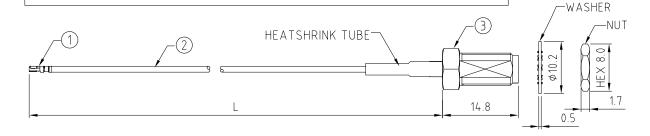



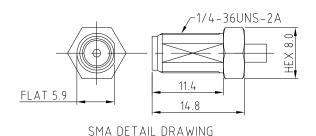



CAB431RF - X X X X - X X - X - 1 CABLE SIZE:

"L" LENGTH IN MM eq: 100MM = 0100

(MIN. 0050-MAX.0400

STANDARD = 0100.0150.0200) TOLERANCE: 50-200mm: ±5mm.

201-400mm: ±7mm.

1 = Ø1.13MM CABLE, COLOR: GRAY WASHER AND NUT OPTIONS:

BLANK = SEPARATELY PACKED (STANDARD)

A = ASSEMBLED WITH CONNECTOR

ORIENTATION OPTIONS:

BLANK = DOES NOT HAVE A FIXED ORIENTATION

F1 = MHF CONNECTION DOWN (L=50-200MM) F2 = MHF CONNECTION UP (L=50-200MM)

F3 = MHF CONNECTION AND D FLAT SAME ORIENTATION (L=50-200MM)

F4 = MHF CONNECTION AND D FLAT OPPOSITE ORIENTATION (L=50-200MM)

(SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)



Drawing Number: CAB431RF


RECOMMENDED SMA

MOUNTING HOLE

 $\phi 6.5 \pm 0.1$ 

Sheet 1

of 1 Drawing (C) E and O E

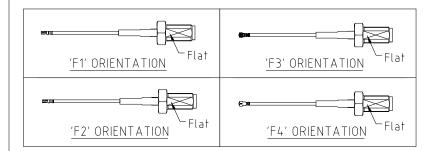

Unstated Tolerances: THIRD ANGLE NTS Scale: .X .XX N/A XXX Drawn: NYW ANGLES Title CABLE ASSEMBLY App'd: XXX Revision: 1.0 Date: 16 SEP. '20 Unit: mm