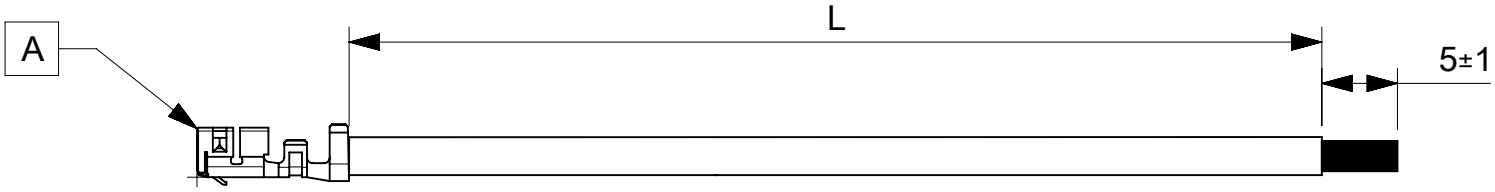


| 6    |           | 5                                       |  | 4 |     | 3   |  | 2 |  | 1 |  |
|------|-----------|---|--|---|-----|-----|--|---|--|---|--|
| ITEM | PART#     | DESCRIPTION                             |  |   | QTY | UOM |  |   |  |   |  |
| A    | 561349001 | 2.0 WTB CONN CRIMP REC AWG#22-#24 CHAIN |  |   | 1   | PC  |  |   |  |   |  |





| PART NUMBER | TITLE                                    | CABLE DESCRIPTION                  | LENGTH 'L' | CABLE COLOR |
|-------------|--|------------------------------------|------------|-------------|
| 2196551121  | Micro-One ISL F-S 75mm 22AWG Lead BK Sn  | 1X22AWG DISC PVC BK UL1569 HOOKUP  | 75±3       | BLACK       |
| 2196551122  | Micro-One ISL F-S 150mm 22AWG Lead BK Sn | 1X22AWG DISC PVC BK UL1569 HOOKUP  | 150±4      | BLACK       |
| 2196551123  | Micro-One ISL F-S 225mm 22AWG Lead BK Sn | 1X22AWG DISC PVC BK UL1569 HOOKUP  | 225±4      | BLACK       |
| 2196551124  | Micro-One ISL F-S 300mm 22AWG Lead BK Sn | 1X22AWG DISC PVC BK UL1569 HOOKUP  | 300±4      | BLACK       |
| 2196551125  | Micro-One ISL F-S 450mm 22AWG Lead BK Sn | 1X22AWG DISC PVC BK UL1569 HOOKUP  | 450±4      | BLACK       |
| 2196551111  | Micro-One ISL F-S 75mm 24AWG Lead BK Sn  | 1X24AWG DISC PVC BK UL1569 HOOK UP | 75±3       | BLACK       |
| 2196551112  | Micro-One ISL F-S 150mm 24AWG Lead BK Sn | 1X24AWG DISC PVC BK UL1569 HOOK UP | 150±4      | BLACK       |
| 2196551113  | Micro-One ISL F-S 225mm 24AWG Lead BK Sn | 1X24AWG DISC PVC BK UL1569 HOOK UP | 225±4      | BLACK       |
| 2196551114  | Micro-One ISL F-S 300mm 24AWG Lead BK Sn | 1X24AWG DISC PVC BK UL1569 HOOK UP | 300±4      | BLACK       |
| 2196551115  | Micro-One ISL F-S 450mm 24AWG Lead BK Sn | 1X24AWG DISC PVC BK UL1569 HOOK UP | 450±4      | BLACK       |
| 2196552121  | Micro-One ISL F-S 75mm 22AWG Lead RD Sn  | 1X22AWG DISC PVC RD UL1569 HOOKUP  | 75±3       | RED         |
| 2196552122  | Micro-One ISL F-S 150mm 22AWG Lead RD Sn | 1X22AWG DISC PVC RD UL1569 HOOKUP  | 150±4      | RED         |
| 2196552123  | Micro-One ISL F-S 225mm 22AWG Lead RD Sn | 1X22AWG DISC PVC RD UL1569 HOOKUP  | 225±4      | RED         |
| 2196552124  | Micro-One ISL F-S 300mm 22AWG Lead RD Sn | 1X22AWG DISC PVC RD UL1569 HOOKUP  | 300±4      | RED         |
| 2196552125  | Micro-One ISL F-S 450mm 22AWG Lead RD Sn | 1X22AWG DISC PVC RD UL1569 HOOKUP  | 450±4      | RED         |
| 2196552111  | Micro-One ISL F-S 75mm 24AWG Lead RD Sn  | 1X24AWG DISC PVC RD UL1569 HOOK UP | 75±3       | RED         |
| 2196552112  | Micro-One ISL F-S 150mm 24AWG Lead RD Sn | 1X24AWG DISC PVC RD UL1569 HOOK UP | 150±4      | RED         |
| 2196552113  | Micro-One ISL F-S 225mm 24AWG Lead RD Sn | 1X24AWG DISC PVC RD UL1569 HOOK UP | 225±4      | RED         |
| 2196552114  | Micro-One ISL F-S 300mm 24AWG Lead RD Sn | 1X24AWG DISC PVC RD UL1569 HOOK UP | 300±4      | RED         |
| 2196552115  | Micro-One ISL F-S 450mm 24AWG Lead RD Sn | 1X24AWG DISC PVC RD UL1569 HOOK UP | 450±4      | RED         |

**NOTES:**

1. Crimping to be done as per Molex standards.
2. The product specification relies on the terminals & wire spec.
3. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 0.9mm Max for 22 AWG and 0.75mm Max for 24 AWG.

| REVISION        |     |                 |                                  |
|-----------------|-----|-----------------|----------------------------------|
| DATE            | REV | DESCRIPTION     | CHANGER                          |
| 2021/12/27      | A   | INITIAL RELEASE | SAIKIG                           |
| DOCUMENT STATUS |     | P1              | RELEASE DATE 2022/01/11 06:51:05 |

|  |   |   |   |                          |  |                      |                      |                    |
|--|---|---|---|--------------------------|--|----------------------|----------------------|--------------------|
| FUNCTIONAL SYMBOLS<br>$\nabla_A = 0$<br>$\nabla_E = 0$<br>$\nabla_P = 0$<br>DIVISIONAL SYMBOLS | DIMENSION UNITS: <b>mm</b> SCALE: <b>NTS</b>                      |   | CURRENT REV DESC:   |                          | <br><br>SEE TABLE |                      |                      |                    |
|  | GENERAL TOLERANCES (UNLESS SPECIFIED)                             |   | EC NO: 690622<br>DRWN: SAIKIG    2021/12/25                                       |                          |  |                      |                      |                    |
|  | ANGULAR TOL ± °   |   | CHK'D: MNARAYAN01    2022/01/11<br>APPR: MNARAYAN01    2022/01/11                 |                          |  |                      |                      |                    |
|  | 4 PLACES ±<br>3 PLACES ±<br>2 PLACES ±<br>1 PLACE ±<br>0 PLACES ± |   | INITIAL REVISION:<br>DRWN: SAIKIG    2021/12/25<br>APPR: MNARAYAN01    2022/01/11 |                          |  |                      |                      |                    |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS   |   | THIRD ANGLE PROJECTION  | DRAWING: <b>A4-SIZE</b>   | SERIES: <b>219655</b>    | DOCUMENT NUMBER: <b>2196551121</b>   | DOC TYPE: <b>PSD</b> | DOC PART: <b>000</b> | REVISION: <b>A</b> |
|  |   |  | MATERIAL NUMBER: SEE TABLE  | CUSTOMER: GENERAL MARKET | SHEET NUMBER: 1 OF 1   |                      |                      |                    |