
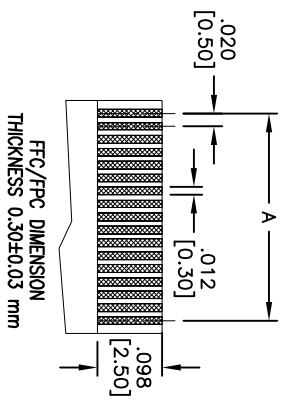

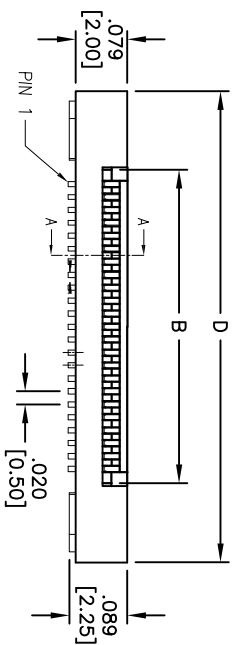
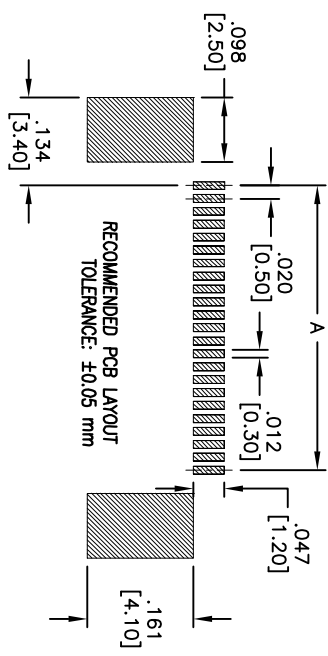



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/20/12	

APPROVED: _____
 DATE: _____ TITLE: _____

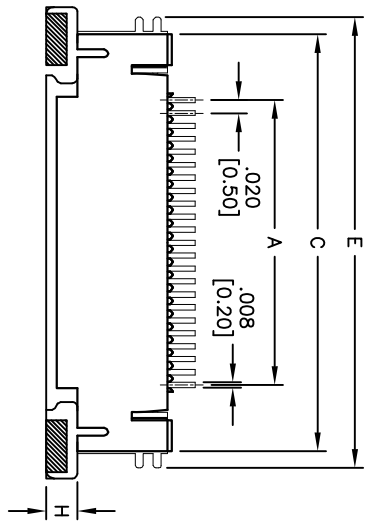

SPECIFICATIONS:
 Material: Hi-temperthermoplastic, rated UL 94V-0, Color: Natural
 Housing: Hi-temperthermoplastic, rated UL 94V-0, Color: Black
 ACTUATOR: Hi-temperthermoplastic, rated UL 94V-0, Color: Black
 Contacts: Copper Alloy
 Holddown: Copper Alloy
 Plating:
 Tin over Copper underplate overall
 Electrical:
 Operating voltage: 50 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 20 mohms max initial
 Insulation resistance: 50 Mohms min
 Dielectric withstanding voltage: 250 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -20°C to +85°C
 Environmental:
 Lead free, RoHS compliant.

Positions: 3 thru 61
 A = .020 [0.50] x No. of Spaces
 B = .020 [0.50] x No. of Spaces +.043 [1.10]
 C = .020 [0.50] x No. of Spaces +.201 [5.10]
 D = .020 [0.50] x No. of Spaces +.280 [7.10]
 E = .020 [0.50] x No. of Spaces +.252 [6.40]
 F = 3~30: .169 [4.30] 31~61: .185 [4.70]
 H = 3~30: .031 [0.80] 31~61: .047 [1.20]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .X ±.10 ØXX ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXX ±.010
 APPROVALS: _____ DATE: _____

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

ZIF FLEX CIRCUIT CONNECTOR
 SIDE ENTRY, UPPER CONTACT, SMT

DRAWN	AY	11/20/12	SIZE	PART NO.	PCA-6L-XX-HU-3	REV.
CHECKED	YC	11/20/12	SCALE	N/A		
APPROVED			REF:	S00043T	SCALE: N/A	SHEET 1 OF 1

