





ISSUE NUMBER	
ORIGINAL	1

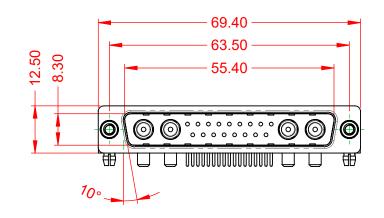




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTAC 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

.XX ±0.13 .XXX ±0.05

	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/201	19
			CHECKED:	DATE:	
	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
			DRAWING NUMBER: 629-21W4640-3N5		ISSUE
			PART NUMBER: 629-21W	4640-3N5	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. -55°C ~ 125°C

СТ

1000V AC rms

