


# molex

## INSULATION DISPLACEMENT CABLE: 0.0394" PITCH, 28 AWG, STRANDED EXTRUDED FEP

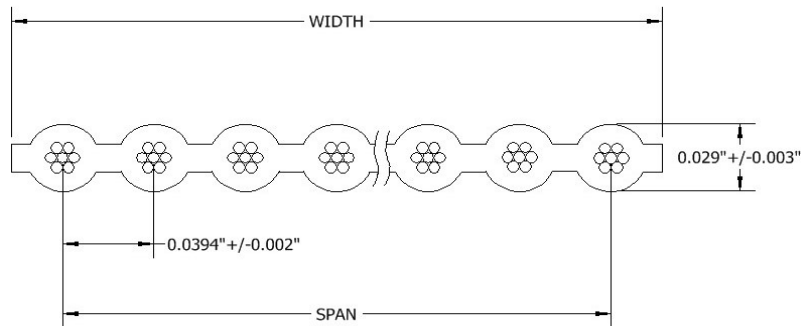

Cond. No.	Part Number	Span	Width
4	1000570197	$0.118" \pm 0.005"$	$0.158" \pm 0.007"$
5	1000570424	$0.158" \pm 0.005"$	$0.197" \pm 0.007"$
6	1000570082	$0.197" \pm 0.007"$	$0.237" \pm 0.007"$
8	1000570218	$0.276" \pm 0.007"$	$0.315" \pm 0.007"$
10	1000570140	$0.354" \pm 0.007"$	$0.394" \pm 0.007"$
10	1000570141	$0.354" \pm 0.007"$	$0.394" \pm 0.007"$
12	1000570145	$0.433" \pm 0.007"$	$0.472" \pm 0.007"$
12	1000570146	$0.433" \pm 0.007"$	$0.472" \pm 0.007"$
14	1000570149	$0.512" \pm 0.007"$	$0.551" \pm 0.007"$
14	1000570426	$0.512" \pm 0.007"$	$0.551" \pm 0.007"$
16	1000570155	$0.590" \pm 0.007"$	$0.630" \pm 0.007"$
16	1000570156	$0.590" \pm 0.007"$	$0.630" \pm 0.007"$
20	1000570161	$0.748" \pm 0.010"$	$0.787" \pm 0.010"$
20	1000570162	$0.748" \pm 0.010"$	$0.787" \pm 0.010"$
24	1000570168	$0.906" \pm 0.010"$	$0.945" \pm 0.010"$
26	1000570173	$0.984" \pm 0.010"$	$1.024" \pm 0.010"$
26	1000570174	$0.984" \pm 0.010"$	$1.024" \pm 0.010"$
30	1000570179	$1.142" \pm 0.010"$	$1.181" \pm 0.010"$
30	1000570180	$1.142" \pm 0.010"$	$1.181" \pm 0.010"$
34	1000570185	$1.299" \pm 0.010"$	$1.338" \pm 0.010"$
34	1000570474	$1.299" \pm 0.010"$	$1.338" \pm 0.010"$
40	1000570192	$1.535" \pm 0.010"$	$1.575" \pm 0.010"$
40	1000570193	$1.535" \pm 0.010"$	$1.575" \pm 0.010"$
44	1000570200	$1.693" \pm 0.010"$	$1.732" \pm 0.010"$
44	1000570201	$1.693" \pm 0.010"$	$1.732" \pm 0.010"$
50	1000570202	$1.929" \pm 0.010"$	$1.968" \pm 0.010"$
50	1000570203	$1.929" \pm 0.010"$	$1.968" \pm 0.010"$

CHARACTERISTICS	
Conductor	28 AWG, 7/36, Silver Plated Copper
Insulation	FEP
Color	Blue Or Blue with Blue Polarity Stripe
Impedance (ohms)	105 Unbalanced
Capacitance (pF/ft)	11.5 Unbalanced
Inductance (uH/ft)	0.12 Unbalanced
Insulation Resistance (Mohm)	>500
Voltage Rating	300V
Temperature Rating	-55°C to 200°C

**STANDARD PACKAGING**  
100 ft./spool, 10 Ft. minimum length

**UL STYLE 20424**