




SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3	1-2

() = MOMENTARY



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 3A @ 120 VAC OR 28 VDC
1A @ 250 VAC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. ACUATION FORCE: 300 \pm 100gf
9. TRAVEL: 1.0 \pm 0.2mm
10. CONTACT RESISTANCE: 20 mOHM MAX.
TYPICAL @ 2-4 VDC
11. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL.
12. OPERATING TEMP.: -30°C to 85°C
13. ▲ DENOTES CRITICAL PARAMETER.
14. 2011/65/EU (ROHS) COMPLIANT.
15. HARDWARE TO BE SHIPPED BULK:
T100011 - LOCK WASHER, QTY 1
T100002 - LOCK RING, QTY 1
T100000 - HEX NUT, QTY 2

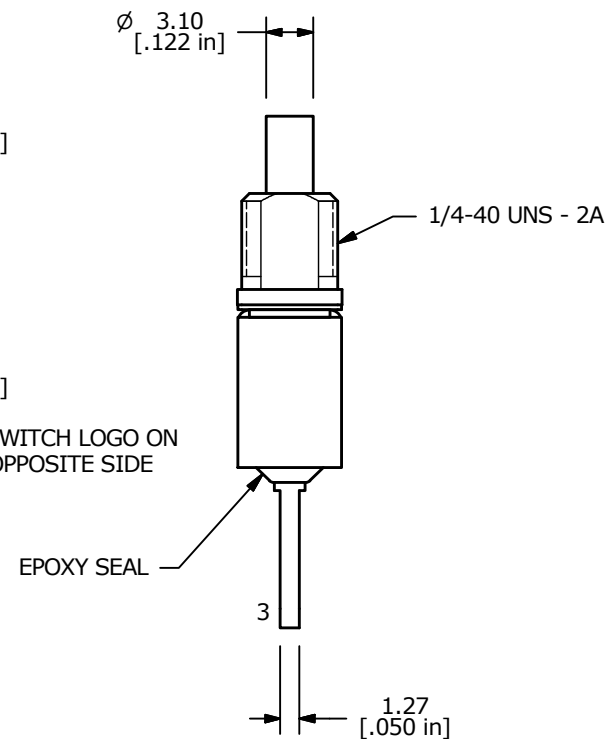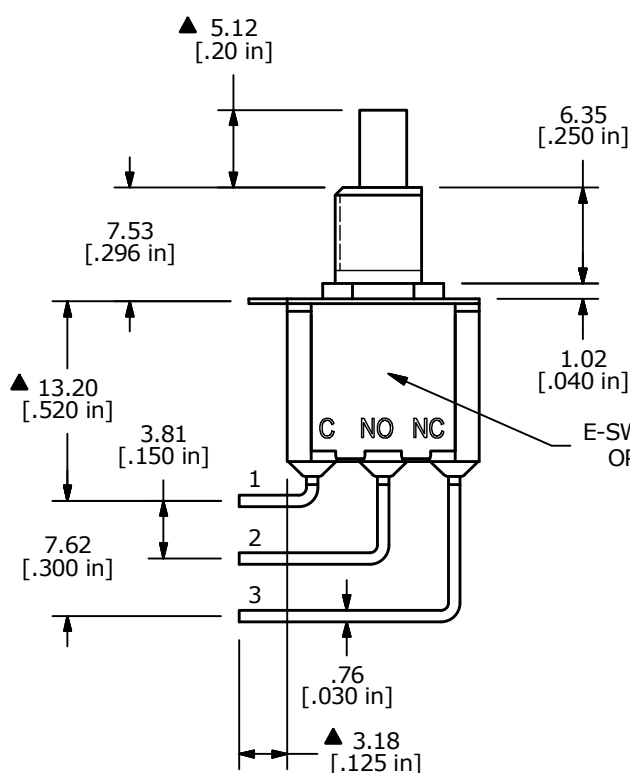

C	23067	UPDATE DRAWING	10/31/17	MW
B	20029	DRAWING CLEAN-UP / UPDATE	6/2/11	BGL
A	16132	NEW PART RELEASE	6/12/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY



TITLE 700SP7B11M7QEH				
SCALE 2:1	DATE 8/29/2003	DR AR	DWG ST711045	REV C