


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-				
	A	ECR-05-010922	13SEPT05	RvH	MvD
	A1	ECR-14-016318	06NOV14	L.P	T.D

P.C.B. HOLE DIM. ACTION PIN	
DRILLED HOLE	: 1.60 ± 0.025 mm
FIN. HOLE	: 1.39 to 1.54 mm
AFTER REFLOW	: 1.37 to 1.54 mm
Cu-thks	: 0.025 to 0.075 mm
SnPb-thks	: 0.004 to 0.010 mm

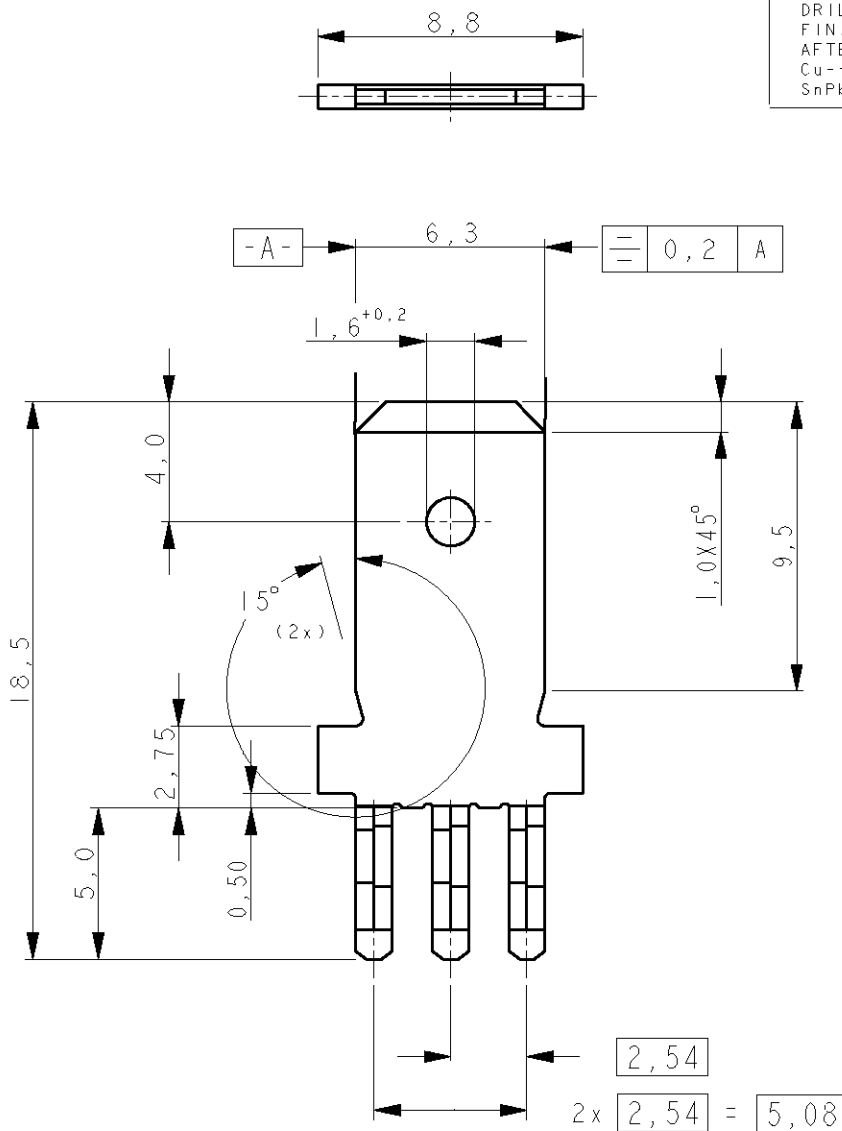

NOTE:

⚠ SUBSTITUTED BY P/N 216843-1

(2,4-3,2 P.C. BOARD THICKNESS.)

⚠ OBSOLETE	2,54 μ M MIN. SN ALL OVER.	PHOSPHORBRONZE	100278-1
	FINISH	MATERIAL	PARTNUMBER

DIMENSIONS: mm	DWN	28-02-91	MATERIAL	FINISH
	RvL	LOKVEN	-	-
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK	13SEPT05	TYCO ELECTRONICS NEDERLAND B.V. 's-HERTOGENBOSCH, THE NETHERLANDS	
	MvD	RIEL		
0 PLC ±-	APVD	13SEPT05	NAME .250 SERIES TAB WITH ACTION PIN FOR POSITIVE LOCK RECEPTACLE	
1 PLC ±-	MvD	RIEL		
2 PLC ±-	PRODUCT SPEC	-	SIZE	CAGE CODE
3 PLC ±-	APPLICATION SPEC	-	A4	00779
4 PLC ±-	WEIGHT	-	DRAWING NO	RESTRICTED TO
ANGLES ±-			©=100278	-
CUSTOMER DRAWING			SCALE	SHEET 65 OF 1 REV A1