


T354A475M010AT

T354, Tantalum, MnO2 Tantalum, Commercial Grade, 4.7 uF, 20%, 10 VDC, Radial, Solid Tantalum, Conformal, Dipped, Lead Spacing = 6.35mm

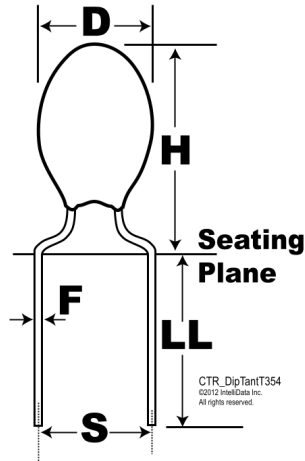

Click [here](#) for the 3D model.

Dimensions

D	4.5mm
H	8.6mm
S	6.35mm +/-0.38mm
LL	4.75mm +/-0.81mm
F	0.5mm +/-0.05mm

Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	1000

General Information

Series	T354
Dielectric	MnO2 Tantalum
Style	Radial
Description	Radial, Solid Tantalum, Conformal, Dipped
Features	Low Leakage
RoHS	Yes
Termination	Tin
AEC-Q200	No
Notes	Longest Lead Is Positive.

Specifications

Capacitance	4.7 uF
Capacitance Tolerance	20%
Voltage DC	10 VDC (85C), 7 VDC (125C), 0.1 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	5%
Leakage Current	0.5 uA