



Stromlaufplan / Schematic diagram



- 1 — Litze braun (+) / flexible conductor brown (+)
- 2 — Litze weiss (0) / flexible conductor white (0)
- 4 — Litze schwarz (S) / flexible conductor black (S)
- 3 — Litze blau (-) / flexible conductor blue (-)

Halogen-freie PUR-Leitung 4x0,34mm²
in schwarz mit UL/CSA-Zulassung /
Halogen-free PUR-conductor 4x0,34mm²
black with approval according to UL/CSA

21 03 515 4401	1,5m
21 03 515 4402	3,0m
21 03 515 4403	5,0m
21 03 515 4404	7,5m
21 03 515 4405	10,0m
Artikelnr.	Nennlänge (L)

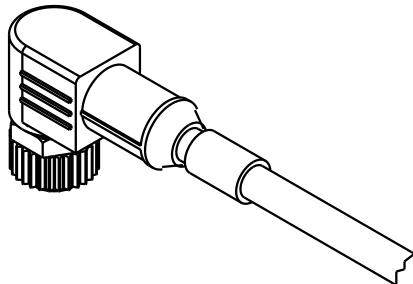

<p>All Dimensions in mm Original Size DIN A 4</p>	Techn. Character.			Nicht tolerierte Masse / Free size tolerances	
		Dat.	Name	Massstab / Scale 1:1	M12-Rundsteckverbinder Buchse gewinkelt / M12-circular connector female angular
	Detail.	22.11.04	Ho		
	Insp.		WELL	Blatt / page /	
411416	17.01.05	Ho	Stand.		
411399	10.01.05	Ho	HARTING Electric GmbH & Co. KG D-32339 Espelkamp		Sub.
411338					
Mod.	Dat.	Name			