





ISSUE NUMBER	
ORIGINAL	

(1)

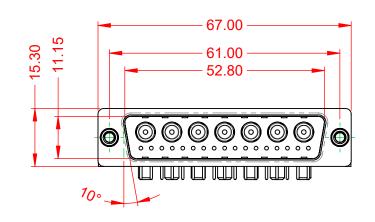




.XX ±0.13 .XXX ±0.05



MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	75Ω (IMPEDANCE)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

WITHSTANDING VOLTAGE:

1000V AC rms



					SW REFERENCE NO.: 629 COMBO ASSEMBLY						
	COMBINATION D-SUB			DRAWN: C.B			DATE: JAN. 01/2019			19	
				CHECKED:			DATE:				
		EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE:	(IN C.A.D. 1:1)		SHEET	1	OF	2	
	CANADA OR USED AS THE BASIS F	SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	DRAWING	29-24W7	7240-7TE			ISSUE			
YOUR	YOUR CONNECTION TO QUALITY & SERV		MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUM	MBER: 62	29-24W7	7240-7TE			1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

