




## MT10/10-ASJL-APC

Ruland Adjustable Two-Way Spring Joint, Clamp 10mm, Height 90mm, Lever Length 63mm, Powder Coated Aluminum

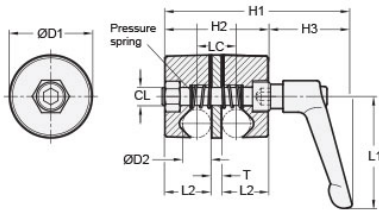


### Description

Ruland MT10/10-ASJL-APC is an adjustable two-way spring joint with a 10mm clamping diameter, M8 clamp screw, 32mm base diameter, 63mm lever length, and 45mm overall length. It is designed to mate Ruland MT10 or the user's own round tubes and rods via a V-groove, allowing a greater tolerance to be bridged. MT10/10-ASJL-APC is aluminum with a powder coating, the lever is zinc die-cast with a plastic coating, and the inserts are stainless steel for added corrosion resistance. It is used in mounting systems for sensors, screens, reflectors, plexiglass machine guards, and other industrial components. The spring is made tighter or looser by adjusting the clamping lever allowing the user to rapidly adjust tubes as needed. MT10/10-ASJL-APC is manufactured by Otto Ganter, inventoried by Ruland, and RoHS3 compliant.

### Product Specifications

Clamping Diameter D2	10 mm	Base Diameter D1	32 mm
Lever Length L1	63 mm	Lever Height H3	45 mm
Body Height H2	45 mm	Overall Height H1	90 mm
Surface To Edge L2	20 mm	Center To Center LC	15 mm
Spacer Thickness T	5 mm	Clamp Screw CL	M8
Weight (lbs)	0.382000	Material Specification	Powder Coated Aluminum
Manufacturer	JW Winco/ Otto Ganter	UPC	634529229972
Country of Origin	Taiwan	Tariff Code	7609.00.0000
UNSPC	31162908		

**Note 1** Performance ratings are for guidance only. The user must determine suitability for a particular application.

**Prop 65**  **WARNING** This product can expose you to chemicals including Soots, Benzene, Lead, and Nickel (metallic), known to the State of California to cause cancer, and Lead and Benzene known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).