


## JSNEJ5350KB6L0

Aliases (SNEJ5350KB6L0)

JSN, Film, Metallized Polyester Stacked, Automotive Grade, 35 uF, 10%, 63 VAC, 100 VDC, 105°C, 17.3X30X15.4, 15.4mm

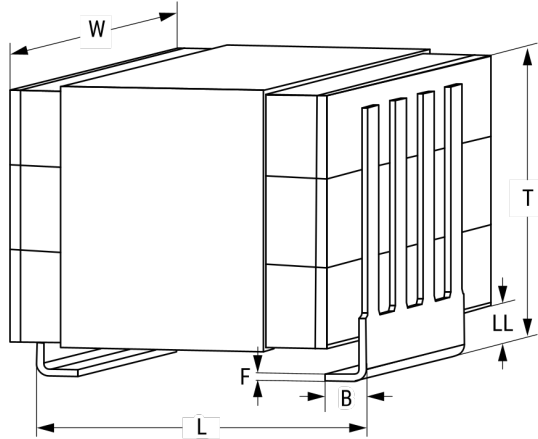

Click [here](#) for the 3D model.

### Dimensions

|           |                |
|-----------|----------------|
| Chip Size | 17.3X30X15.4   |
| L         | 17.3mm MAX     |
| W         | 30mm MAX       |
| T         | 15.4mm MAX     |
| LL        | 2mm +/-1mm     |
| F         | 0.3mm +/-0.1mm |
| B         | 2mm +/-1mm     |

### Packaging Specifications

|                    |      |
|--------------------|------|
| Packaging          | Tray |
| Packaging Quantity | 252  |

### General Information

|                  |                              |
|------------------|------------------------------|
| Series           | JSN                          |
| Dielectric       | Metallized Polyester Stacked |
| Style            | SMD Chip                     |
| RoHS             | Yes                          |
| Lead             | J Leads                      |
| Qualifications   | AEC-Q200                     |
| AEC-Q200         | Yes                          |
| Component Weight | 4.008 g                      |
| Shelf Life       | 104 Weeks                    |

### Specifications

|                       |            |
|-----------------------|------------|
| Capacitance           | 35 uF      |
| Capacitance Tolerance | 10%        |
| Voltage AC            | 63 VAC     |
| Voltage DC            | 100 VDC    |
| Temperature Range     | -55/+125°C |
| Rated Temperature     | 105°C      |
| Dissipation Factor    | 1% 1kHz    |
| Max dV/dt             | 27 V/us    |