





ISSUE NUMBER	
ORIGINAL	1

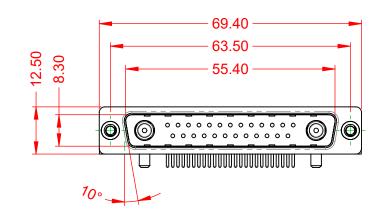




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	20A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

DIELECTRIC WITHSTANDING VOLTAGE:

.XX ±0.13 .XXX ±0.05

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY					
COME				DRAWN: C.B			DATE: JAN. 01/2019		19
			CHECKED:		DATE:				
	AC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE:	(IN C.A.D. 1:1	1)	SHEET	1	OF	2
IURUNI	TORONTO, ONTARIO CANADA D QUALITY & SERVICE		DRAWING NUMBER: 629-27W2			/2640-2TC			ISSUE
YOUR CONNECTION TO QUALITY			PART NUM	IBER:	629-27W2	2640-2TC	;		1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

