
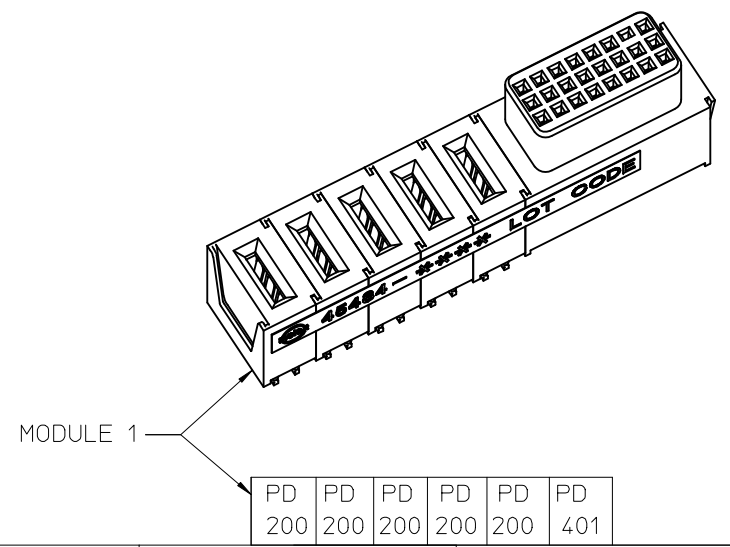
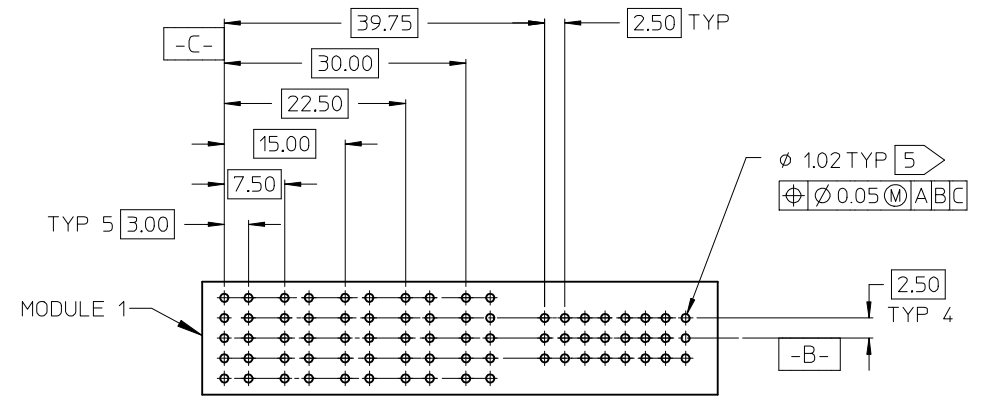

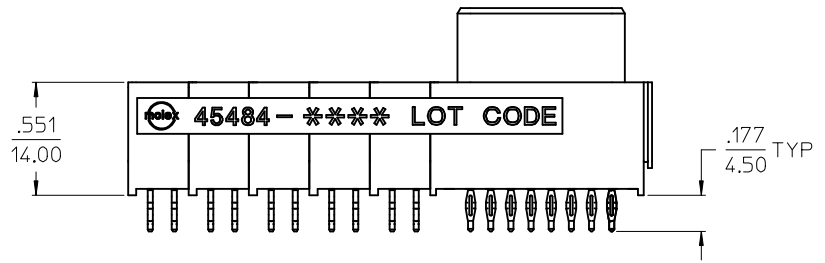


- NOTES:
1. MATERIAL: LCP, GLASS FILLED, UL94V-0, BLACK.
CONTACTS: COPPER ALLOY
 2. FINISH: SELECT GOLD: 30 MI MIN.
SELECT TIN: 100 MI MIN.
BOTH OVER NICKEL
 3. PRODUCT SPECIFICATION: PS-45424-001.
 4. PACKAGING SPECIFICATION: PK-45484-001.
 5. PCB HOLE SPECIFICATION: PS-45424-001.

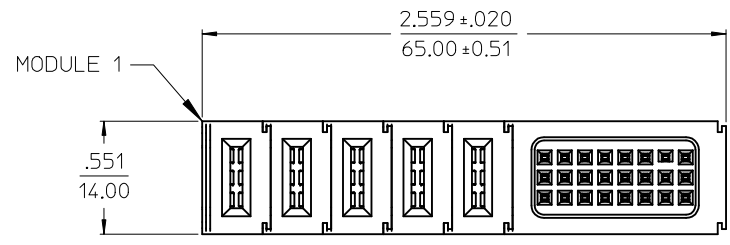

PCB LAYOUT: COMPONENT SIDE
PCB THICKNESS: .093/2.36
PCB TOLERANCE: ±.002/0.05

GEOM TOL PCB	DESCRIPTION	REV
		D1
EC NO: UCP2005-2724	DRWN: ADRA1N02005/07/07	
CH'KD: KSAMIEC	2005/07/08	
APPR: APATEL	2005/08/17	

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---
ANGULAR ± 1/2°		
DRAFT WHERE APPLICABLE		
MUST REMAIN WITHIN DIMENSIONS		

SCALE	DESIGN UNITS
1:1	METRIC
DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
SAMIEC	2003/03/25
CHECKED BY	DATE
MARGULIS	2003/03/25
APPROVED BY	DATE
MARGULIS	2003/03/25

THIRD ANGLE PROJECTION		REVISE ON CAD ONLY	
TITLE			
POWER DOCK ASSEMBLY SOCKET VERTICAL CPI			
molex MOLEX INCORPORATED			
MATERIAL NO.	DOCUMENT NO.	SHEET NO.	
45484-0005	SD-45484-005	1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			