

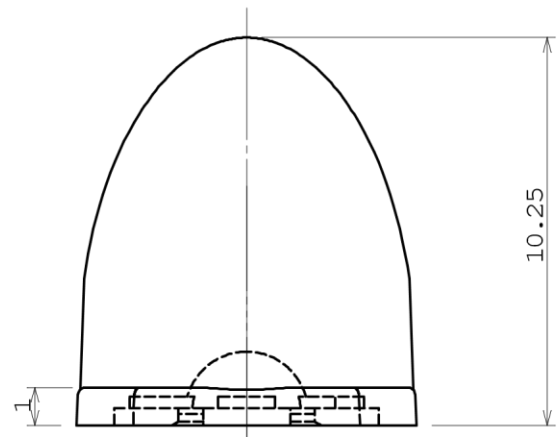



O	1	2		3		4		C/P	ZRD
	SPECIFICATIONS <仕様図>	SURFACE TREATMENT <表面処理>	SYM	DATE	REVISION	REVR	APPR		
	REFERENCE <参考図>	HEAT TREATMENT <熱処理>	△ <sup>1</sup> x						
		FINISH <仕上げ>	△ <sup>2</sup> x						
			△ <sup>3</sup> x						

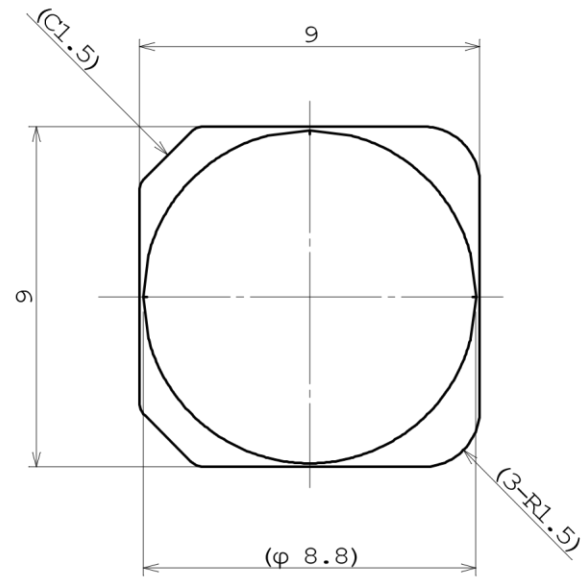

NOTE)

・一般寸法公差：下記C公差を適用

General dimensional tolerance: Range C



TOLERANCE UNLESS SPECIFIED				ORIGINAL DATE 2021/07/07		MATERIAL (COMPOUND) Silicone rubber		TITLE DK-12M-119B		
RANGE	A	B	C	SCALE 5:1	UNIT mm	COLOR Clear	DRAWING NO. 21070709E			
LESS THAN 6	±0.2	±0.1	±0.1	SIZE A 4	3RD ANGLE SYSTEM	HARDNESS A80	DESIGN	DRAWN	CHECKED	APPROVED
OVER 6 TO 20	±0.3	±0.2	±0.1				T.Motoyanagi	T.Motoyanagi	S.Endo	E.Ishiguro
OVER 20 TO 50	±0.5	±0.3	±0.2	 株式会社朝日ラバー						
OVER 50 TO 100	±1.0	±0.5	±0.3							
OVER 100 TO 300	±2.0	±1.0	±0.5							
OVER 300 TO 500	±5.0	±2.5	±1.0							
ANGLE	±2°									

# ◆ASA COLOR LENS

Part number : DK-12M-119B / DK-35M-119B

## Initial Properties

### 1. Physical Properties

Items	Materials : ASR-A80MC
Color	Transparent
Hardness JIS Type A	A80/S±5
Total light transmittance(t=2mm)	90% and more
Refractive index (25°C) (D-line 589 nm)	1.41±0.03

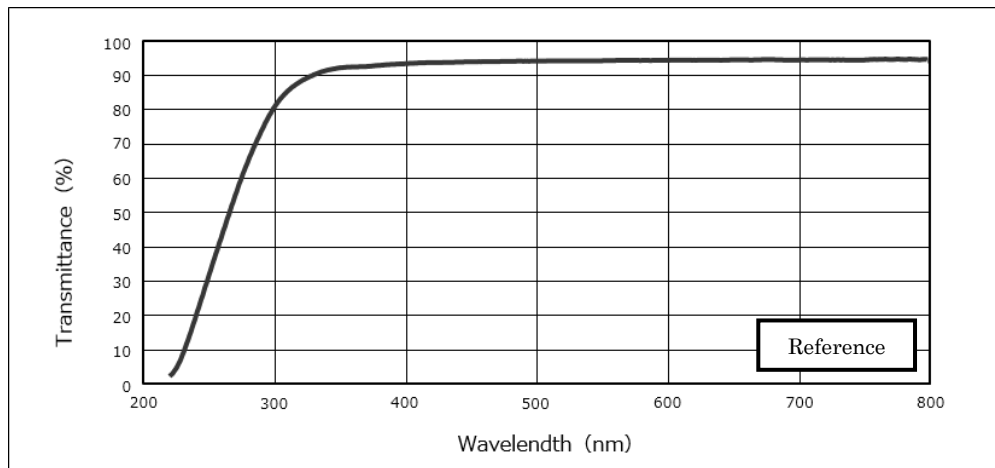


Figure1. Total light transmittance of ASR-A80MC (t=2mm)

### 2. Light Distribution Data

