
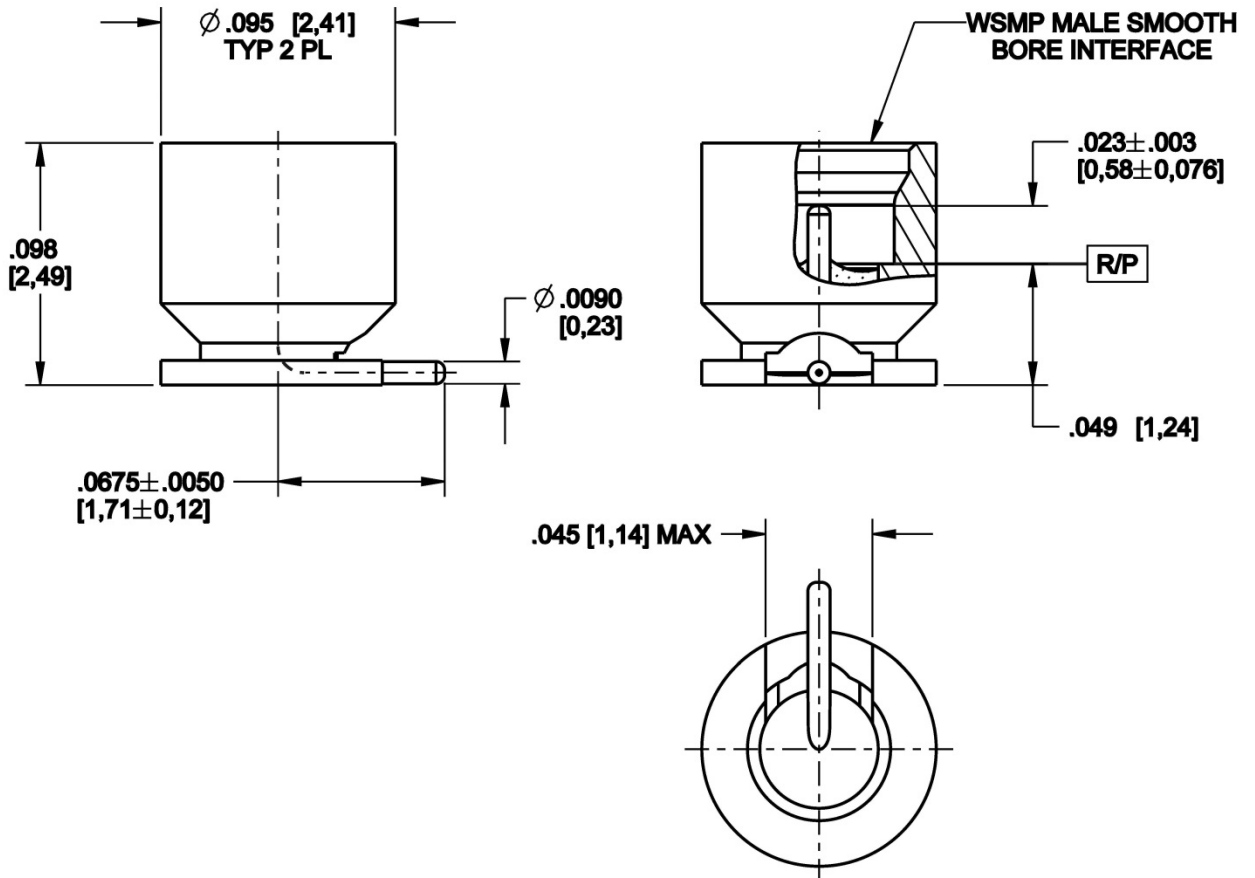
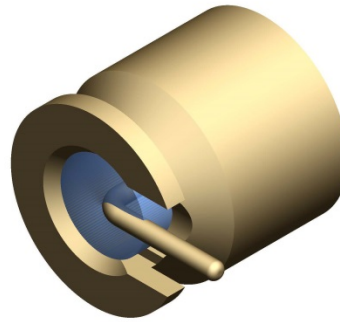


WSMP

Male Smooth Bore
Right Angle Launch

W1S143-40ML5

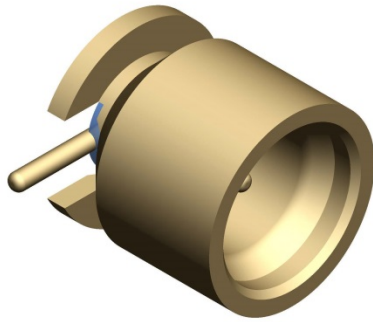

All dimensions are in inches [mm]

Interface

According to

Rosenberger WSMP™ Interface standards

Material and plating

Connector parts

Body and contact

Material

Kovar® per ASTM F15

Plating

Hard gold 6µIN [0,15µm] min, over Nickel, 80µIN [2,0µm] min

Dielectric

Corning 7070 Glass

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

WSMP

Male Smooth Bore
Right Angle Launch

W1S143-40ML5

Electrical data

| | |
|----------------------------------|---|
| Impedance | 50 Ω |
| Frequency | DC to 80 GHz |
| Return loss (typical)* | ≥ 26 dB, DC to 40 GHz ≥ 19 dB, 40 to 50 GHz ≥ 14 dB, 50 to 70 GHz |
| Insertion loss | ≤ 0.12 x √f(GHz) dB |
| Insulation resistance | ≥ 3.5 x10 ³ MΩ |
| Center contact resistance | ≤ 2.0 mΩ |
| Outer contact resistance | ≤ 6.0 mΩ |
| Test voltage (at sea level) | 250 V rms |
| RF High Potential (at sea level) | 150 V rms @ 5 MHz |
| RF-leakage | ≥ -80 dB (typical mated pair) |

*Connector only, return loss in application depends decisively on PCB layout

Mechanical data

| | |
|-------------------------------|------------------------------|
| Mating cycles | |
| - Smooth Bore | ≥ 500 |
| Engagement force (typical) | |
| - Smooth Bore | 1.2 lb _f [5.3 N] |
| Disengagement force (typical) | |
| - Smooth Bore | 1.0 lb _f [4.45 N] |

Environmental data

| | |
|---------------------------|---|
| Temperature range | -55°C to +165°C |
| Thermal shock | MIL-STD-202, Method 107, Condition B |
| Corrosion | MIL-STD-202, Method 101 |
| Vibration | MIL-STD-202, Method 204, Condition D |
| Shock | MIL-STD-202, Method 213, Condition I |
| Moisture resistance | MIL-STD-202, Method 106, except Step 7B |
| Max soldering temperature | IEC 61760-1, +500°F [+260°C] for 10 seconds |
| 2002/95/EC (RoHS) | compliant |

Tooling

| | |
|-----------------|-----|
| Extraction tool | N/A |
|-----------------|-----|

Suitable cables

N/A

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/05.10/6.0

| | | | | | | | |
|---|--------|-----------|--------|------|---|------------|---------------|
| Draft | Date | Approved | Date | Rev. | Engineering change number | Name | Date |
| R. Fisher | 7/1/16 | R. Hosler | 7/1/16 | a00 | ECN 17-1092 | J. Havener | 6/27/17 |
| Rosenberger of North America, LLC P.O. Box 309 Akron, PA USA 17501 www.rosenbergerna.com | | | | | Tel. : +1.717.859.8900 Fax : +1.717.859.7044 Email : info@rosenbergerna.com | | Page 2 / 2 |