

SCR38-350-1R8B008JH

Aliases (UALAG1R8B008JH)

General Information

Series

Style

RoHS

Notes

Current

Temperature Range

DC Resistance

KEMET, SCR38, AC Line Filters, Common Mode, 0.85 mH

SCR38

Yes


Through-Hole

Lead Spacing (S/S1) Are For Reference Only.

35 A

-25/+120°C

2.5 mOhms

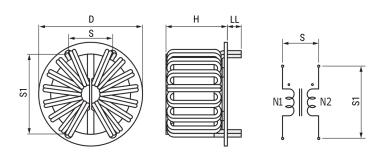

Miscellaneous Temperature Rise Maximum: 65 K.

Core Mn-Zn Ferrite

Specifications

Voltage AC 250 VAC
Inductance 0.85 mH

Click here for the 3D model.

Dimensions		
D	53.5mm MAX	
Т	53.5mm MAX	
Н	31.5mm MAX	
LL	7mm +/-3mm	
S	22mm NOM	
S1	40mm NOM	
Wire Size	1.8mm x 2P	

Packaging Specifications		
Packaging	Tray	
Packaging Quantity	48	
Component Weight	120 g	

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.