
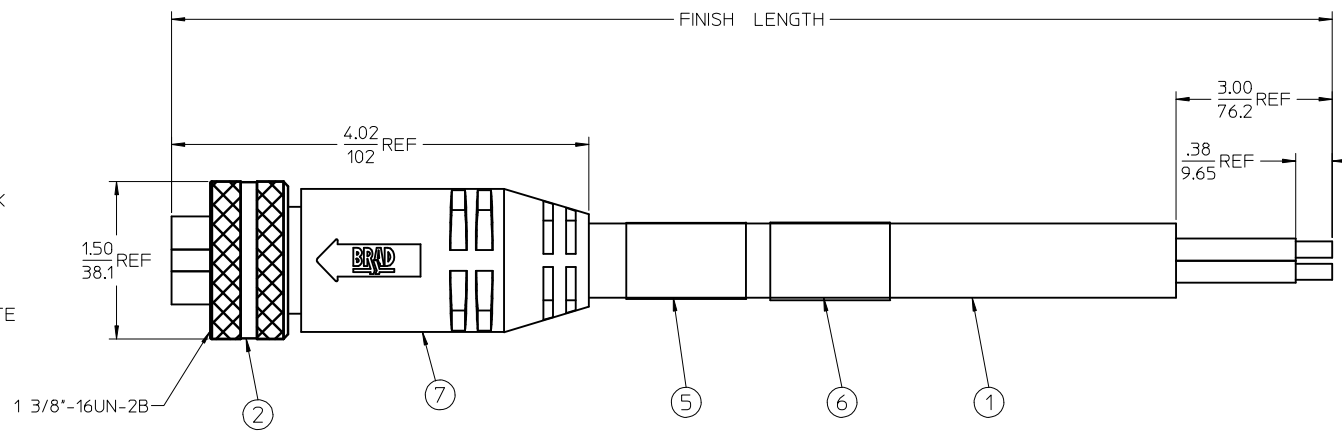


MATERIAL NO.	ENG. NO.	FINISH LENGTH
1300630215	C04000A57M080G	8M +350-0MM (26.24'+13.78-0')
1300630217	C04000A57M150G	15M +621-0MM (49.21'+24.45-0')
1300630218	C04000A57M200G	20M +621-0MM (65.61'+24.45-0')

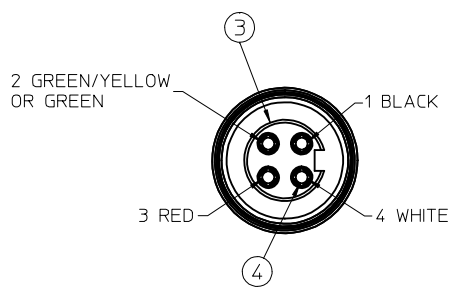

NOTES:

- MATERIAL: SEE TABLE
- FINISHES: SEE TABLE
- LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE
- MATES WITH: QC 4 POLE CONNECTORS
- ELECTRICAL DATA:
10AWG UL TYPE: TC-ER/ST00W STRANDED
POLES: 4
MAX VOLTAGE: 600V AC/DC
MAX THRU CURRENT: 32A
PROTECTION IP67
TEMPERATURE RANGE: -20°C TO 90°C
- PACKAGING:
CABLE ASSEMBLIES ARE BAGGED SEPERATLY IN POLY BAGS
WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG.
- ASSEMBLY IS RoHS COMPLIANT
- AGENCY CERTIFICATIONS:
UL LISTED PER UL 2237, E258922, CATEGORY PVVA

ITEM	QTY	DESCRIPTION	MATERIAL	FINISH
7	1	OVERMOLD	PVC	BLACK
6	1	LABEL	PLASTIC FILM	BLACK/YELLOW
5	1	WARNING LABEL	PLASTIC FILM	----
4	4	QC SOCKET CONTACT	Cu ALLOY	GOLD PLATED
3	1	QC FEMALE INSERT	PVC	BLACK
2	1	QC FEMALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
1	1	10AWG 4 POLE CABLE	PVC	BLACK

UPDATED DRAWING EC NO: IPG2014-1095 DRWNGGUSTAFSON 2015/09/02 CHKD:VOU 2015/11/12 APPR: JFURPHY 2015/09/16	DESCRIPTION REV
--	--------------------

QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS
-------------------------------	--

DIMENSION STYLE IN/MM DRAWN BY DATE BRUPERT 2011/11/01 CHECKED BY DATE APPROVED BY DATE	SCALE 1:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION
--	--

MATERIAL NO. SEE CHART SIZE C	DOCUMENT NO. SD-130063-090 SHEET NO. 1 OF 1
-------------------------------------	--