
T	G	ات	m			0	t		Þ		
	Z'	ØS									
						LAY	DUT SHOWN AS EXAMPL	E			
		Keying Sho	own as example								
CHARACTERISTICS			Connector dime								
	MIL-DTL-38999 Series III			Nominal 41.7 Max	[]	ŀ
-Shell Material	: Composite		Z'	31.5 Max			ot be liable for any non-o				
-Shell Plating	: Nickel		VV THREAD	M31x1-6g			of the Products which do issued by either of the Pa				
-Insulator	: Thermoplastic						nal recommendation, te		r 1		
-Contacts -Seals & Grommet	: Copper Alloy : Silicon Elastomer]	
-Seals & Grommet	: Sold over copper Alloy 0.8µm minin	num					Country FR	Jurisdiction & Not Lis		-	
-Durability	: 500 Mating cycles	nam			FR Not Listed]			
	au contacts and Accessories					PI	N: 8D521M11	PB			
-Temperature Range											
-Salt Spray	: 2000 hours				A 07-10-	-2016 First Release					
– -Mass	: 38 g ± 10%				ISS DA	TE Latest modification	n - by			MOD N°	<u>,</u>
					Designed By:	Date:		CUSTO	DMER DRAWING		
					TITLE		Composite	Plug 8D seri	es		
BASIC SERIES:	8D 5 - 21	M 11 P B			SCALE		General linear	NPF	RDS / PROJECT		
					NA		Tolerances: ±		859		
SHELL TYPE : Plug wi						~ ~	±	Th	is document is the prop	perty of	_
	andard Crimp Contact			ORIENTATION : B	SOURI	AU WWW.	SOURIAU.COM		SOURIAU it must not be reproduc		
SHELL SIZE : 21		」 「	CONTACT	TYPE : PIN(500 Matings)					nmunicated without pe	rmission	
	Nickel		(CONTACT LAYOUT : 21-11	FORMAT		SOURIAU DR	G N°		SHEET	
PLATING : M =					A3				1	1	

r		۵	п П	m		0
		Contact Layout				
4	-x -	$ \begin{array}{c} $				
	B +.306 (7.77) C +.348 (8.84) D +.227 (5.77) E +.000 (0.00) F 227 (5.77) Shell Arrangement NL	Contacts (Insert arrangement 21-11) tion Contact position Location Y-axis position X-axis Y-axis (mm) ID (mm) (mm) +332 (8.43) G -344 (8.84) -061 (1.55) -061 (1.55) J -121 (3.07) +332 (8.43) -270 (6.86) K +000 (0.00) +.123 (3.12) -353 (8.97) L +000 (0.00) 115 (3.92) -270 (6.86) umber of contacts Size contacts Service rating Contact location Supersede	_			
ω		11 12 I All MS20055-1	1			
	L					
						SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
						PN: 8D5211
					A 07-10-20 ISS DATE	16 First Release Latest modification - by
					Designed By: TITLE	Date:
_					SCALE	General linear Tolerances:
					SOURIA	
					FORMAT A3	SOURIAL 8D521N
l	Н	G	F	E	D	C

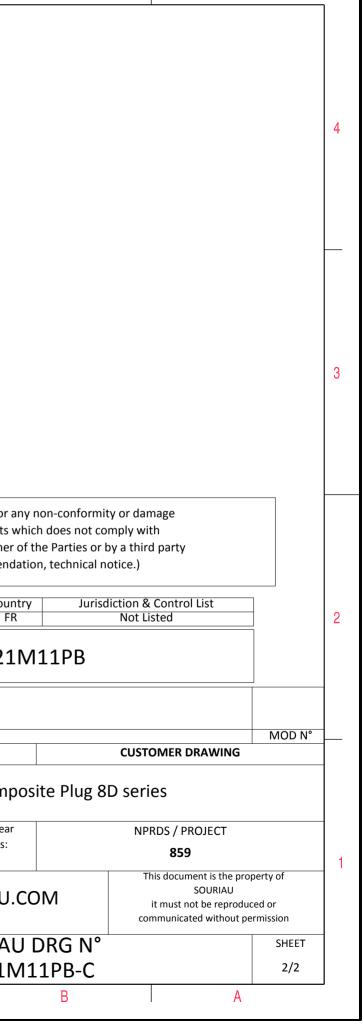

 \triangleright

σ