



ISSUE NUMBER	
ORIGINAL	(1)

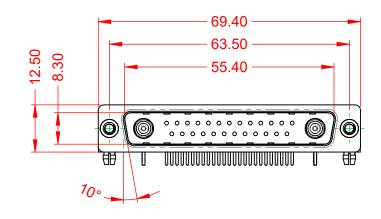




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING:	50Ω (IMPED/
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CON
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
	5000MO min

.XX ±0.13 .XXX ±0.05

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:


ANCE)

-55°C ~ 125°C

NTACT

 $5000M\Omega$ min.

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY		
COMBINA	COMBINATION D-SUB		DATE: JAN. 01/20	19		
			DATE:			
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
	ARIO SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-27W	2640-5NB	ISSUE		
YOUR CONNECTION TO QUALITY & SERV	/ICE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-27W	2640-5NB	1		



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

