


COIL: @ +25°C
 RESISTANCE 218 Ω ±10%
 NOMINAL VOLTAGE 12 VDC
 MUST OPERATE 9.2 VDC
 MUST RELEASE _____

ENVIRONMENT:
 VIBRATION _____ CPS TO _____ CPS @ _____ g's
 SHOCK _____ g's _____ MS. DURATION
 TEMPERATURE -45 °C TO +70 °C

NOTES: OPERATE 5MS MAX
RELEASE 3MS MAX
500VAC DIELECTRIC ALL POINTS

CUSTOMER DATA SHEET

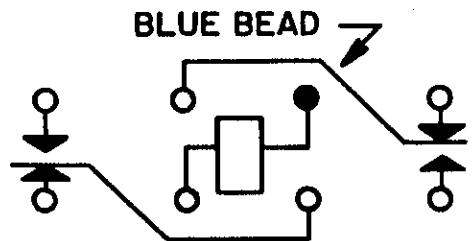

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 4-1-91 CK. A/1/91 JMB



CUST. P & B
 CUST. NO. HP-11D-12

TYPE "HFW" RELAY

HFW1201S139