

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	5055700501	2.0W/B SINGLE REC HSG 5CKT BLK	2	PC
C	5055721000	2.0W/B REC CRIMP TERM CHAIN H>F	10	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B5	1X22AWG DISC SR-PVC BK UL10002	BLACK
A2	B4	1X22AWG DISC SR-PVC BK UL10002	BLACK
A3	B3	1X22AWG DISC SR-PVC BK UL10002	BLACK
A4	B2	1X22AWG DISC SR-PVC BK UL10002	BLACK
A5	B1	1X22AWG DISC SR-PVC BK UL10002	BLACK

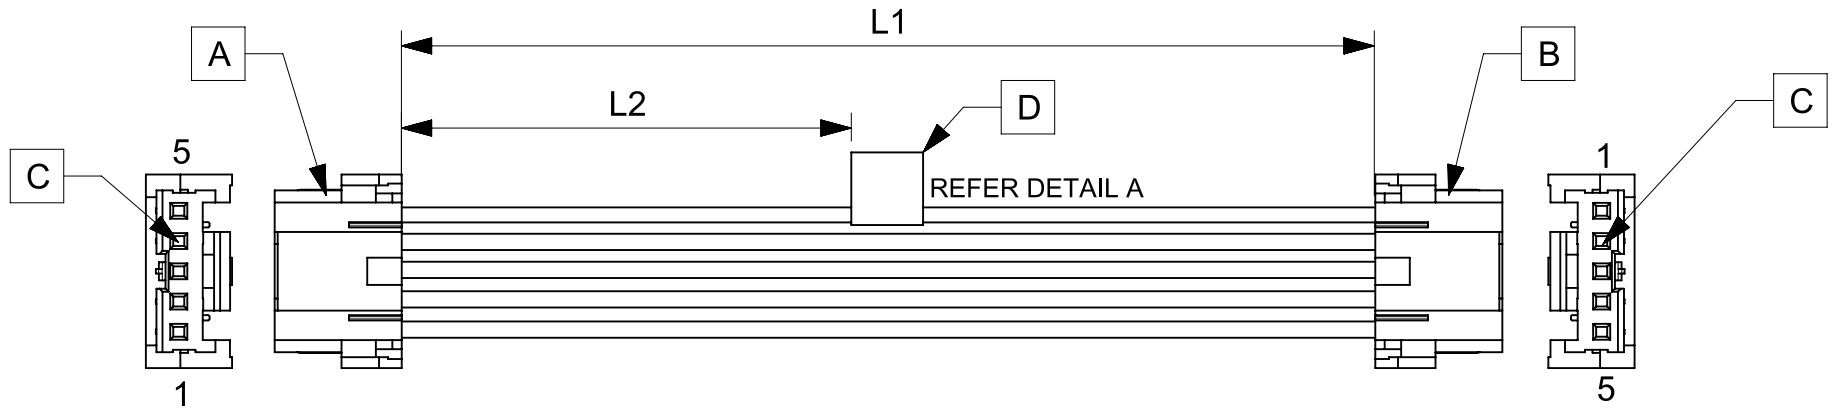


TABLE			
PART NUMBER	L1	L2(REF)	TITLE
2181011050	50±3	12	MICROLOCK PLUS 2.0 RR 5CKT 50MM DISC Sn
2181011051	100±5	37	MICROLOCK PLUS 2.0 RR 5CKT 100MM DISC Sn
2181011052	150±8	62	MICROLOCK PLUS 2.0 RR 5CKT 150MM DISC Sn
2181011053	300±10	137	MICROLOCK PLUS 2.0 RR 5CKT 300MM DISC Sn
2181011054	600±10	287	MICROLOCK PLUS 2.0 RR 5CKT 600MM DISC Sn

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2021/03/12	A	INITIAL RELEASE	AS20

- NOTES**
- CONNECTOR VIEW SHOWN IS FROM MATING SIDE.
  - LABEL TEXT MUST BE 2MM MAX IN HEIGHT WITH ARIAL FONT.
  - LABEL MUST BE WRAPPED IN FLAG TYPE.
  - CABLE ASSEMBLY MUST BE TESTED 100% FOR CONTINUITY AND POLARITY.

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$	DIMENSION UNITS <b>mm</b>	SCALE <b>NTS</b>	CURRENT REV DESC:  EC NO: 665161 DRWN: AS20 CHK'D: RDESAI01 APPR: RDESAI01	<div style="text-align: center; font-size: 2em; font-weight: bold;">molex</div> <p>SEE TABLE</p>			
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION 	DRAWING <b>A4-SIZE</b>	SERIES <b>218101</b>	MATERIAL NUMBER SEE TABLE	CUSTOMER GENERAL MARKET	SHEET NUMBER 1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2021/05/26	12:08:18
-----------------	----	--------------	------------	----------