



PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 03.03.2022
MODIFICATION / REVISION DATE: 03.03.2022

AKSNT/x BLACK Jumper Connector

CHANGE NOTIFICATION: PCN 20220303_AKSNTxBLACK

DESCRIPTION OF CHANGES: CHANGE OF PRODUCT LOCATION
CHANGE OF DATA SHEET
New Draw.-No. ASS_1004_COrev04

REASON FOR CHANGE: CHANGE OF PRODUCT LOCATION
CHANGE OF PRODUCT DIMENSIONS, TOLERANCES AND/OR PROPERTIES

KEY CHARACTERISTICS OF CHANGE: Details see page 3

PRODUCTS AFFECTED: AKSNT/x BLACK

DATE OF CHANGE AND IMPLEMENTATION: CHANGE: WEEK 10 / YEAR 2022
IMPLEMENTATION: 03.03.2022

RESPONSE: NO RESPONSE TO THIS NOTIFICATION IS REQUIRED

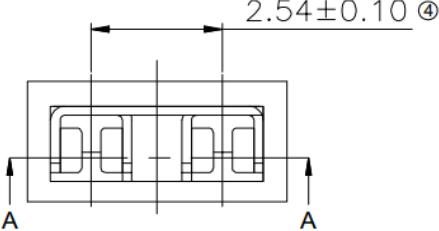


Auf dem Schüffel 1
 D-58513 Lüdenscheid
 Tel.: +49-2351 - 554-200
 Fax +49 (2351) 554-861
 info@assmann-wsw.com
 www.assmann-wsw.com

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 03.03.2022
 MODIFICATION / REVISION DATE: 03.03.2022

AKSNT/x BLACK	OLD VERSION	AKSNT/x BLACK	NEW VERSION
<p>NOTES:</p> <ol style="list-style-type: none"> 1. Insulation: 30% Glass Filled PBT, UL94V-0, Color Black 2. Contact : Brass 3. Current Rating: 3A Max 4. Dielectric Voltage: 1000V rms / 1 minute 5. Insulation Resistance: 1000M ohm Min. 6. Contact Resistance: 30m ohm Max. 7. Operating and Storage Temperature: -40°C ~ +105°C 8. MatInq Cycles: 10 Min. <p>AKSNT/x BLACK</p> <p>Contact Area Plating: ③ G: Gold Flash Z: Tinned</p>	<p>NOTES:</p> <ol style="list-style-type: none"> 1. Insulator: PBT+30% G.F,UL94V-0,Black 2. Contact : Phosphor Bronze,Au or Sn over Ni 3. Current Rating: 3.0AMP 4. Dielectric Withstanding Voltage: 1000V AC/ minute 5. Insulation Resistance: 500MΩ Min. 6. Contact Resistance: 20mΩ Max. 7. Operating Temperature: -40°C ~ +105°C <p>③ AKSNT/x BLACK</p> <p>Contact Area Plating: ③ G: Gold Flash Z: Tinned</p>		
FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE			

	1	2	3	4	5	6	7					
A	<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;">  </div> <div style="width: 45%;"> <p>NOTES:</p> <ol style="list-style-type: none"> 1. Insulator: PBT+30% G.F, UL94V-0, Black ④ 2. Contact : Phosphor Bronze, Au or Sn over Ni 3. Current Rating: 3.0AMP 4. Dielectric Withstanding Voltage: 1000V AC/ minute ④ 5. Insulation Resistance: 500MΩ Min. ④ 6. Contact Resistance: 20mΩ Max. 7. Operating Temperature: -40°C ~ +105°C <p>③ AKSNT/x BLACK</p> <p style="margin-left: 20px;">└─ Contact Area Plating: ③ G: Gold Flash Z: Tinned</p> </div> </div>							A				
B												
C												
D												
E												
F												
G	RoHS compliant Unit:mm	Scale	Free				Date	Name	Customer-No.	ASSMANN WSW components	ASS 1004 CO rev04	SHEET 1 / 1
H		TOLERANCE					Drawn	03.03.2004	Hellwig			
		X.	±0.35	④	Update the dimension and tolerance	02.03.2022	Peter	Approved	02.03.2022	Peter	ASSMANN WSW-No.	AKSNT/G BLACK AKSNT/Z BLACK
		X.X	±0.25	③	Update	07.06.2013	Winnie				Drawing-No.	
		X.XX	±0.20	②	Update	27.07.2009	Rale					
		X.XXX	±0.15	①	Drawn	03.03.2004	Hellwig					
		Angle	TOL	Id.	Modification	Date	Name				Replace	
	1	2	3	4	5	6	7					