



.XX ±0.13 .XXX ±0.05

ORIC

**ISSUE NUMBER** GINAL (1)

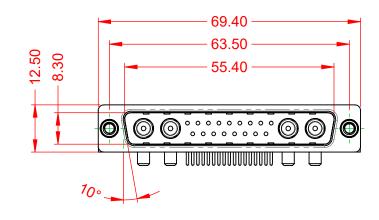



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED

## 10.67 O 13.20


OPERATING TEMPERATURE:	-55°C ~ 125°C		
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT		
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTA 10mΩ MAX.		
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.		

WITHSTANDING VOLTAGE:

VT)

ГАСТ

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
	EDAC INC	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	CUFUS TORONTO, ONTARIO CANADA		DRAWING NUMBER: 629-21W4640-3T6		ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-21W	4640-3T6	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

