

T	G	п	m	0



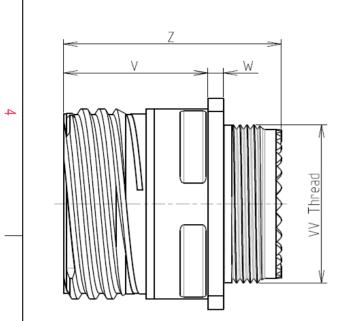

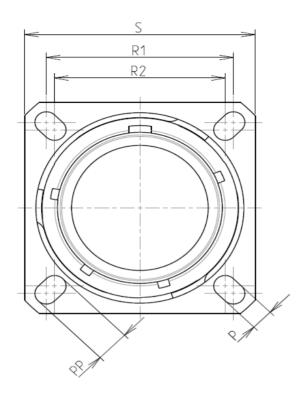

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C

: 500 hours

8D 0

G

17

Κ

20

S


F

В

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 26.97 R1 24.61 R2 S 33.3±0.3 V 20.83+0/-1.25 W 2.1/2.5 31.5 Max Ζ VV THREAD M25x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

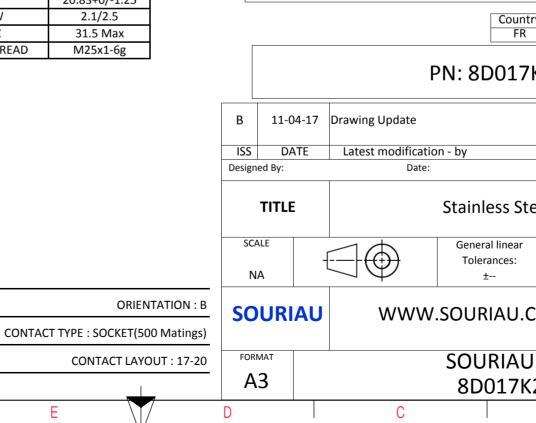

	Φ		A		_	
S EXAMPLE						
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)						
intry R	Jurisd	iction & Cont Not Listed	rol List	_	2	
7K20SB						
		CUSTOME	RDRAWING	MOD N°		
Steel Receptacle 8D series						
ar	NPRDS / PROJECT					
			59	nerty of	1	
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
UDRG N°						
′K2	OSB-C		٨	1/2	J	
	В		А			

	工	۵	<u>п</u>	m	D	0
4	(Contact Layout 20* 4# 12			τ _α	Panel Cute SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		16#22D	_		<u>\</u>	
		17-20	-			ØT
	Ctc A	X Y 0 5.51	-			Max. thickness panel for receptacle: Type 0: front m
	B	3.17 0	-			
	c	0 -5.51	-			Dim
	D	-3.17 0	-			ØA
ω	1	4.16 7.06	1			ØAA R1
	2	4.29 4.29]			ØT
	3	7.11 4.03				
	4	8.05 1.4				
	5	8.05 -1.4				
-	6	7.11 -4.03	-			
	7	4.29 -4.29	-			SOURIAU shall not be liable for a
	8	4.16 -7.06	-			due to a use of the Products v the Specifications issued by either
	9	-4.16 -7.06	-			(professional recommend
	10	-4.29 -4.29	-			
	11	-7.11 -4.03	-			Coun
N	12	-8.05 -1.4	-			
	13	-8.05 1.4	-			PN: 8D017
	14 15	-7.11 4.03 -4.29 4.29	-			TN. 80017
	15	-4.25 4.25	-		B 11-04	-17 Drawing Update
	10	4.10 7.00]			
					ISS DAT Designed By:	E Latest modification - by Date:
					TITLE	Stainless S
<u> </u>					SCALE NA	General linear Tolerances:
					SOURIA	WWW.SOURIAU.
					FORMAT A3	SOURIAI 8D017I
l	Н	G	F	E	7 D	C
	•••		•	_	_	

