


REVISIONS							
REV	ECO	DESCRIPTION	DATE	BY	APPR		
A1	-	RELEASE NEW DRAWING	16/JUL/20	VITO	TOMMY		

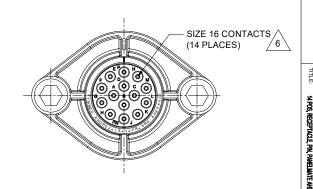

AHDP02-18-14PR-SRA

## NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

 $\hbox{HOUSING: THERMOPLASTIC; BLACK}$ 

SEAL: SILICONE RUBBER

THREADED INSERT: STAINLESS STEEL

2. MODIFICATIONS: SMOOTH RING ADAPTER (SRA); REDUCED DIA. WIRE SEAL;


SEALED PANEL MOUNT

## 3. SPECIFICATIONS:

- 3.1 OPERATING TEMPERATURE: -55°C TO +125°C.
- 3.2 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
- 3.3 INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.
- 3.4 MOISTURE RESISTANCE: IP67&IP69K (MATED CONDITION).
- 3.5 MATING CYCLE DURABILITY: 100 CYCLES
- 3.6 RoHS COMPLIANT
- 4. MATING PART: AHDP06-18-14S\* (\* = SEAL TYPE)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.



CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL	CURRENT
SIZE	O.D.	O.D.	WIRE RANGE	RATING
16	1.35 mm (.053in)	3.05 mm (.120 in)	14-20 AWG (2.0-0.5mm²)	

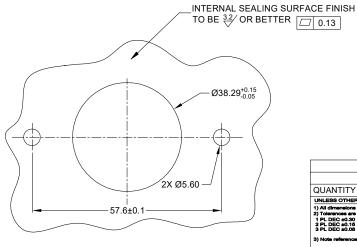


41.9±0.5

Ø30.9

NEXT ASS'Y

RECOMMENDED PANEL MOUNTING HOLE

RECOMMENDED PANEL THICKNESS: 1.6 TO 4.7MM

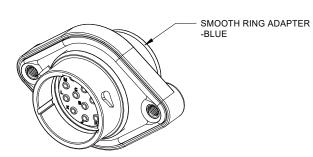

AHDP02-18-14PR-SRA DESCRIPTION PART NUMBER ITEM MATERIALS LIST QUANTITY UNLESS OTHERWISE SPECIFIED SIGNATURES DATE Ampheno VITO 16/JUL/20 ORION 17/JUL/20 44724 Morley Drive Clinton Township, MI 48036 TOMMY 20/JUL/20 MATERIAL SPECIFICATIONS 14 POS. RECEPTACLE, PIN. PANELMATE THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DAT SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHT OF REPRODUCTION ARE IMPLIED. ALL AHDP SIZE 18, RD SEAL, SRA PROCESS SPECIFICATIONS В

ALE: NONE

DURAMATE SHEET 1 OF 1

ISIONS ARE SUBJECT TO NORMAL

MANUFACTURING VARIATIONS