
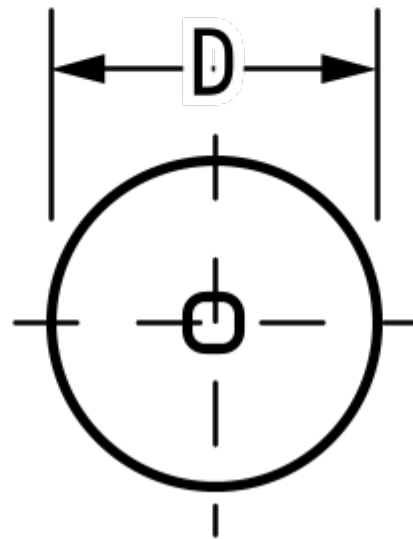


# C114C560K2G5CA

LDD Comm C0G, Ceramic, 56 pF, 10%, 200 VDC, C0G

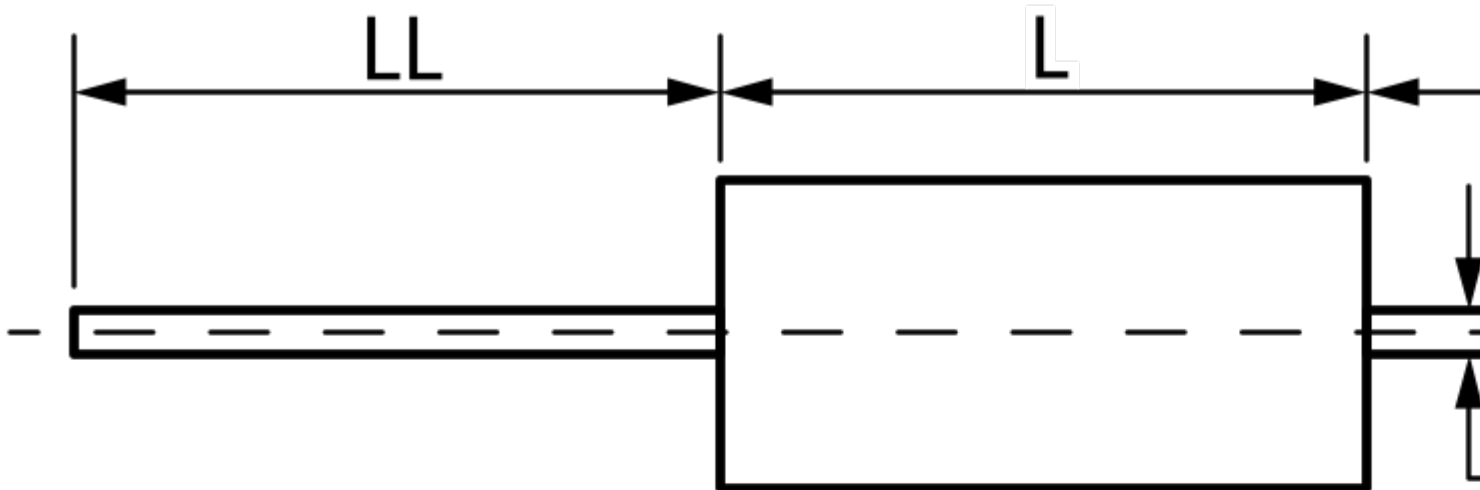

Click [here](#) for the 3D model.

## Dimensions

- D 2.29mm +/-0.25mm
- L 4.06mm +/-0.25mm
- LL 38.1mm MIN
- F 0.51mm -0.08mm

## Packaging Specifications

Packaging Bulk, Bag

Packaging Quantity 200

## General Information

Series LDD Comm C0G

RoHS No

Prop 65 **WARNING:** Cancer and reproductive harm -

<http://www.p65warnings.ca.gov>.

SCIP Number f30e2214-6f19-489b-928a-4aa9281a81a7

Termination Lead (SnPb)

AEC-Q200 No

Notes Lead Length Shown Is For Parts Supplied In Bulk, See Packaging Specifications For Lead Lengths When Not Provided In Bulk.

## Specifications

Capacitance	56 pF
Capacitance Tolerance	10%
Voltage DC	200 VDC
Dielectric Withstanding Voltage	500 VDC
Temperature Range	-55/+125°C
Temperature Coefficient	C0G
Dissipation Factor	0.1% 1 mHz 25C
Insulation Resistance	17.857 GOhms

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - d099e25d-db1c-4f4b-8abe-c31b5a650f44

© 2006 - 2023 KEMET

Generated 5/18/2023 - d099e25d-db1c-4f4b-8abe-c31b5a650f44

© 2006 - 2023 KEMET