


MSTBT 2,5/12-STF

Order No.: 1919815

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1919815>Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V,
Number of positions: 12, Pitch: 5 mm, Color: green

Commercial data

| | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 193591 |
| sales group | E111 |
| Pack | 50 pcs. |
| Customs tariff | 85366990 |
| Catalog page information | Page 201 (CC-2009) |

Product notes

WEEE/RoHS-compliant since:
01/01/2003

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Certificates / Approvals



Certification


CB, CSA, CUL, GOST, UL, VDE-PZI

Accessories

| Item | Designation | Description |
|---------------------|--------------------------|--|
| General | | |
| 1733169 | EBP 2- 5 | Insertion bridge, fully insulated, for plug connectors with 5.0 or 5.08 mm pitch, no. of positions: 2 |
| Marking | | |
| 0804293 | SK 5,08/3,8:FORTL.ZAHLEN | Marker card, printed horizontally, self-adhesive, 12 identical decades marked 1-10, 11-20 etc. up to 91-(99)100, sufficient for 120 terminal blocks |
| Plug/Adapter | | |
| 1734634 | CP-MSTB | Keying profile, is inserted into the slot on the plug or inverted header, red insulating material |
| Tools | | |
| 1205053 | SZS 0,6X3,5 | Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip |

Diagrams/Drawings

Dimensioned drawing

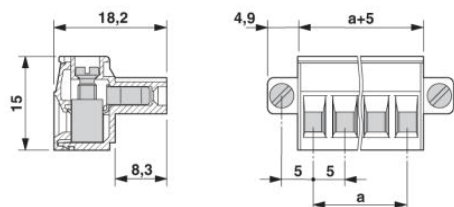

MSTBT 2,5/12-STF Order No.: 1919815

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1919815>

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;