



752 Series Surface Mount Resistor Network

Features

- Low Profile Surface Mount Lead-Less Package
- Solid Ceramic Construction
- High Density Packaging
 - Single Row [SRT] & Dual Row [DRT] Terminations
- Nickel Barrier Solder-Coated Pads
- No Internal Dendrite Growth
- Designed for Visual Inspection & Board Cleaning
- Tape and Reel Packaging

RoHS Compliant in Accordance with EU Directive 2011/65/EU

- Lead-Free Termination Finish
- Exemption 7(c)-I, Electrical and electronic components containing lead [Pb] in glass

Part Weight:

- 08/16 Pads • 180.70mg
- 09/18 Pads • 203.30mg
- 10/20 Pads • 225.90mg
- 12/24 Pads • 271.10mg

Applications

- Telecom Infrastructure
- Optical Networking
- Wireless Networks
- Storage Area Networks
- Media Servers
- Test & Measurement
- Industrial Controls
- Medical Electronics
- Commercial Military & Aerospace

Description

752 Series Resistor Networks are single packaged devices containing an array of homogeneous resistor elements. CTS network designs provide a smaller circuit footprint, excellent reliability, improved TCR tracking and resistor tolerance matching; while helping to save placement costs by reducing application component count.

Ordering Information

| Model | Number of Pins | Schematic | Resistor Code | Resistor Tolerance | RoHS Compliant | Packaging | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-------------------------|------------------|---------------|--|----------------|-----------------------|-----|------------------|--|------|-----------|------|-----------|----|-----------|-------|---------|----|---------|----|---------|----|---------|----|---------|---|------------------|------|----------------|---|----------------|---|------------------|---|-------------------------|--|--|-----------------------|--|-----|---------|---|--|-----------------|--|---|------|---|--|--------------|--|-------|-----------|-----|-----------------|------|------------------|
| 752 | 08 | 3 | 103 | G | P | TR7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>Code</th> <th>Pin Count</th> <th>Code</th> <th>Pin Count</th> </tr> <tr> <th>SRT</th> <th>DRT</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>08</td> <td>8 Pads</td> <td>16</td> <td>16 Pads</td> </tr> <tr> <td>09</td> <td>9 Pads</td> <td>18</td> <td>18 Pads</td> </tr> <tr> <td>10</td> <td>10 Pads</td> <td>20</td> <td>20 Pads</td> </tr> <tr> <td>12</td> <td>12 Pads</td> <td>24</td> <td>24 Pads</td> </tr> </tbody> </table> | | Code | Pin Count | Code | Pin Count | SRT | DRT | | | 08 | 8 Pads | 16 | 16 Pads | 09 | 9 Pads | 18 | 18 Pads | 10 | 10 Pads | 20 | 20 Pads | 12 | 12 Pads | 24 | 24 Pads | <table border="1"> <thead> <tr> <th>Code</th> <th>Schematic Type</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Busser Circuit</td> </tr> <tr> <td>3</td> <td>Isolated Circuit</td> </tr> <tr> <td>5</td> <td>Dual Terminator Circuit</td> </tr> </tbody> </table> | | Code | Schematic Type | 1 | Busser Circuit | 3 | Isolated Circuit | 5 | Dual Terminator Circuit | <table border="1"> <thead> <tr> <th colspan="2">Code Resistor Value *</th> </tr> </thead> <tbody> <tr> <td>103</td> <td>10k ohm</td> </tr> </tbody> </table> <p>* See Addendum for Standard EIA Values and Codes</p> | | Code Resistor Value * | | 103 | 10k ohm | <table border="1"> <thead> <tr> <th colspan="2">Code Compliance</th> </tr> </thead> <tbody> <tr> <td>P</td> <td>RoHS</td> </tr> </tbody> </table> | | Code Compliance | | P | RoHS | <table border="1"> <thead> <tr> <th colspan="2">Code Packing</th> </tr> </thead> <tbody> <tr> <td>Blank</td> <td>Bulk Pack</td> </tr> <tr> <td>TR7</td> <td>Tape & Reel, 7"</td> </tr> <tr> <td>TR13</td> <td>Tape & Reel, 13"</td> </tr> </tbody> </table> | | Code Packing | | Blank | Bulk Pack | TR7 | Tape & Reel, 7" | TR13 | Tape & Reel, 13" |
| Code | Pin Count | Code | Pin Count | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SRT | DRT | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 08 | 8 Pads | 16 | 16 Pads | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 09 | 9 Pads | 18 | 18 Pads | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 10 Pads | 20 | 20 Pads | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | 12 Pads | 24 | 24 Pads | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code | Schematic Type | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Busser Circuit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Isolated Circuit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Dual Terminator Circuit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code Resistor Value * | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 103 | 10k ohm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code Compliance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P | RoHS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code Packing | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Blank | Bulk Pack | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TR7 | Tape & Reel, 7" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TR13 | Tape & Reel, 13" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | <table border="1"> <thead> <tr> <th colspan="2">Schematic Types 1 & 3</th> <th colspan="2">Schematic Type 5</th> </tr> <tr> <th>Code</th> <th>Tolerance</th> <th>Code</th> <th>Tolerance</th> </tr> </thead> <tbody> <tr> <td>G</td> <td>±2% [std]</td> <td>Blank</td> <td>±2%</td> </tr> <tr> <td>F</td> <td>±1%</td> <td></td> <td></td> </tr> <tr> <td>D</td> <td>±0.5%</td> <td></td> <td></td> </tr> <tr> <td>J</td> <td>±5%²</td> <td></td> <td></td> </tr> </tbody> </table> | | Schematic Types 1 & 3 | | Schematic Type 5 | | Code | Tolerance | Code | Tolerance | G | ±2% [std] | Blank | ±2% | F | ±1% | | | D | ±0.5% | | | J | ±5% ² | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Schematic Types 1 & 3 | | Schematic Type 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code | Tolerance | Code | Tolerance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| G | ±2% [std] | Blank | ±2% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| F | ±1% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | ±0.5% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| J | ±5% ² | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Notes:

1. No dashes or spaces to appear in part number.
2. Not supported per PCN ECP-3200029. Use code "G" as standard platform tolerance.

**Not all performance combinations and resistor values may be available.
Contact your local CTS Representative or CTS Customer Service for availability.**

This product is specified for use only in standard commercial applications. Supplier disclaims all express and implied warranties and liability in connection with any use of this product in any non-commercial applications or in any application that may expose the product to conditions that are outside of the tolerances provided in its specification.



Electrical & Environmental Specifications

Operating Conditions

| Resistance Range [ohm] | Resistance Tolerance [%] ¹ | Operating Temperature Range | Temperature Coefficient | Dielectric Strength | Maximum Operating Voltage ² |
|------------------------|---|-----------------------------|--|---------------------|--|
| 10 - 1M | ±2% Std. or 0.5 ohm [whichever is greater] | -55°C to +125°C | ±200ppm/°C [standard, 10 Ohms - 1M] ±100ppm/°C [special, 33 ohms - 1M ohms] | 100V _{AC} | 25V |

1. See Ordering Information for other options available.

2. Not to exceed rated power.

Power Rating

| SRT DRT | 8 Pad | 9 Pad | 10 Pad | 12 Pad | - 16 Pad | - 18 Pad | - 20 Pad | - 24 Pad |
|------------|-------|-------|--------|--------|-------------|-------------|-------------|-------------|
| @ +25°C | 1.2W | 1.3W | 1.4W | 1.7W | 1.4W | 1.5W | 1.6W | 2.0W |
| @ +70°C | 0.08W | 0.85W | 0.90W | 1.1W | 0.90W | 0.95W | 1.0W | 1.3W |


1. Total network power.

Maximum Resistor Power

| Schematic | 1 | 3 | 5 |
|-----------|-------|-------|-------|
| @ +25°C | 0.12W | 0.24W | 0.12W |
| @ +70°C | 0.08W | 0.16W | 0.08W |

1. Not to exceed total network power.


Power Derating Curve

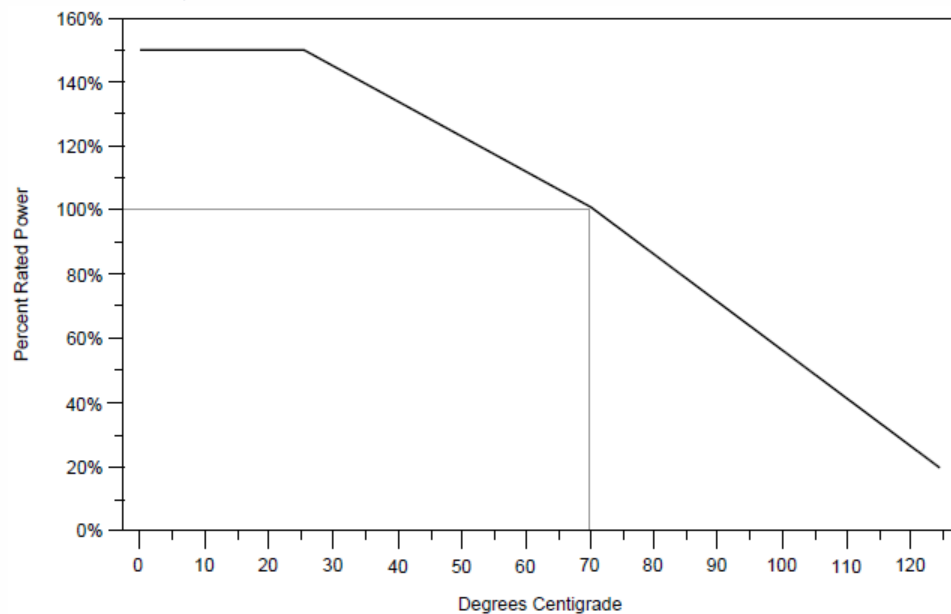

Electrical & Environmental Specifications


Circuit Types

Bussed SRT [Schematic 1]

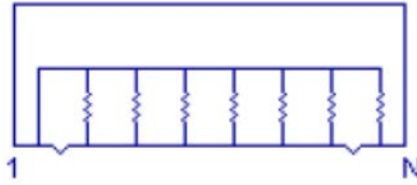


Isolated SRT [Schematic 3]

[Not available in 9 Pads Configuration]

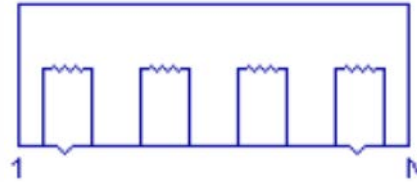


Dual Terminator SRT [Schematic 5]

[Not available in DRT]

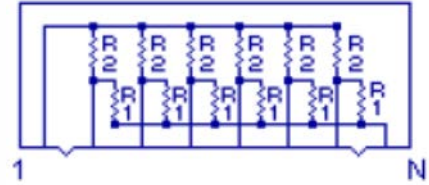


Bussed DRT [Schematic 1]

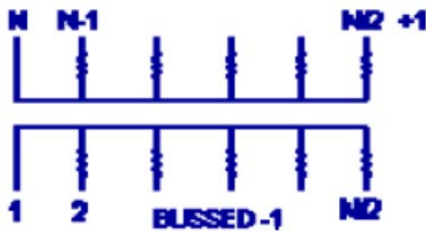

Isolated DRT [Schematic 3]

[Not available in 18 Pads configuration]

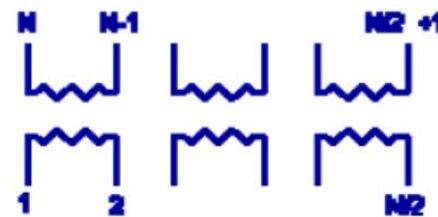



Environmental Parameters

| Test | Maximum Delta R [%] | MIL-STD-202 Method | Test Description |
|---------------------------|---------------------|--------------------|---|
| Thermal Cycle | 0.50 | 107 Condition B | 5 cycles -65°C to +125°C |
| Short Time Overload | 0.50 | | 2½ times rated working voltage for 5 seconds [100V maximum] |
| Moisture Resistance | 0.50 | 106 | 240 hours, 0.1 rated load, -10°C to +65°C, 90% RH |
| Load Humidity | 1.00 | | 1,000 hours, 0.1 rated load, +70°C, 85% - 92% RH |
| High Temperature Exposure | 1.00 | | 240 hours @ +125°C, no load |
| Load Life | 1.00 | 108 Condition F | 2,000 hours @ +70°C, rated load |
| Resistance to Solder Heat | 0.25 | | 30 seconds @ +218°C, dwell |
| Mechanical Shock | 0.25 | 213 Condition I | 100g, 1m second, 3 shocks each plane |
| Vibration | 0.25 | 204 Condition D | 20g, 10Hz - 2,000Hz, 4 houes per plane |
| Leaching Test | No leach > 50% | EIA/IS-703-4.13.B | Immererse in +245°C ±5°C SAC305 solder pot for 30 sec. |
| Shear Test | NA | | ≥ 2,000PSI |
| Low Temperature Storage | 0.25 | | 24 hours @ -65°C, no load |
| Low Temperature Operation | 0.25 | | 45 minutes @ -65°C, full load |
| Flammability | N/A | | 94V-0 |
| Non-Fungus | Pass | --- | MIL-STD-810C |
| Resistance to Solvents | Pass | | Isopropyl alcohol, Freon TMC |
| Solderability | Pass | | RMA Flux, +230°C, 5 seconds dip, 95% coverage |

Mechanical Specifications

Package Drawing

| Package SRT/DRT Pads | "A" Code Dimension | |
|-------------------------|--------------------|--------------|
| | mm | inch |
| 08/16 | 11.81 ±0.12 | 0.465 ±0.005 |
| 09/18 | 13.08 ±0.12 | 0.515 ±0.005 |
| 10/20 | 14.35 ±0.12 | 0.565 ±0.005 |
| 12/24 | 16.89 ±0.12 | 0.665 ±0.005 |

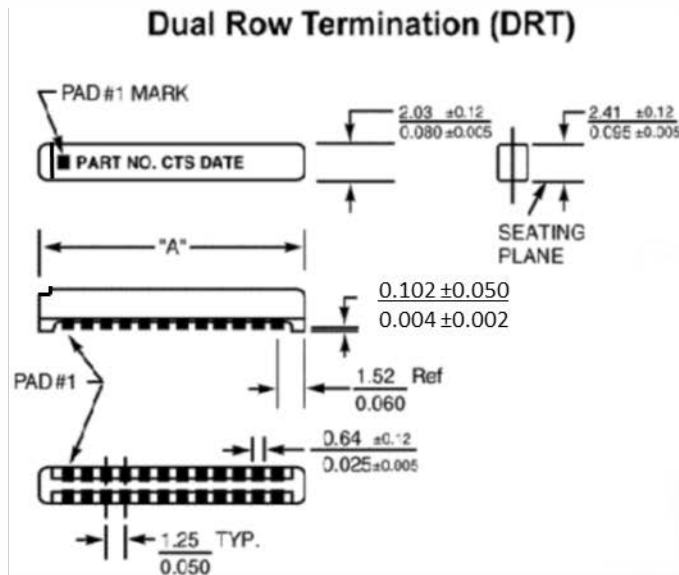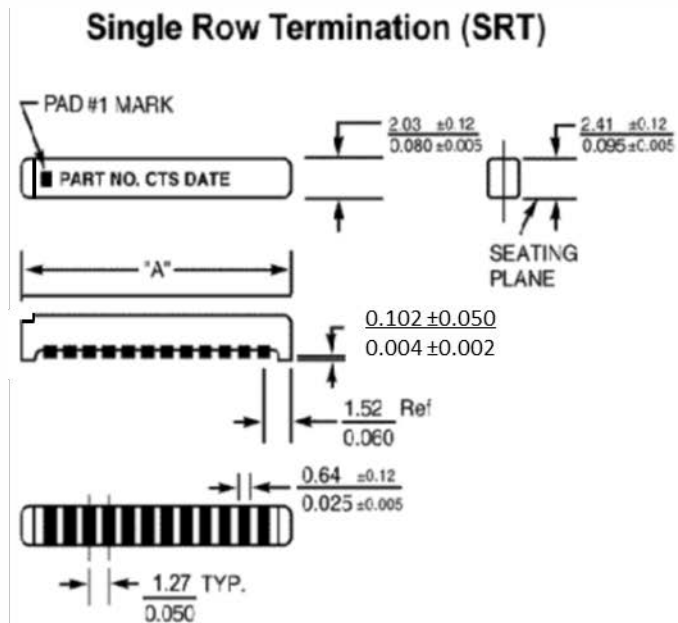


Notes

- JEDEC termination code (e3). Barrier plating is nickel [Ni] over silver [Ag] thick film pad with Matte tin [Sn] finish.
- Reflow conditions per JEDEC-J-STD-020; +260°C maximum, 20 seconds.
- MSL = 1.

Marking Information

- – Pin 1 identifier.
 - zz – Pad count, 8, 9, 10, 12, 16, 18, 20 or 24.
 - S – Schematic type, 1, 3 or 5.
 - xxxx – Resistance value code, 3 or 4 digits.
 - T – Resistor tolerance code; G, F or D. Leave blank for Schematic Code 5.
 - P – RoHS compliant.
 - CTS – Manufacturer.
 - YYWW – Date Code: YY – year, WW – week.
- * See table for marking examples.





Mechanical Specifications

Marking Examples

| Pad Count [SRT/DRT] | Pad 1 Identifier | Pad Count | Schematic Number | Resistance Value Code | Resistor Tolerance | Lead-Free P Code | CTS Logo | Date Code | Marking Example | Associated Part Number |
|---------------------|------------------|-----------|------------------|-----------------------|--------------------|------------------|----------|-----------|-----------------|------------------------|
| 12/24 | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | | 752123220GP |
| 10/20 | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | | 752101103GP |
| 9/18 | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | | 752091472GP |
| 8/16 | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | | 752083681GP |

Recommended Solder Pad Layout

| Package | | Dimensions | | | | | |
|---------|------|------------|------|-------|------|------|-------|
| | | D | P | L | W | J | S |
| 752 | mm | 1.27 | 1.27 | 3.18 | 0.76 | 1.27 | 0.64 |
| | inch | 0.05 | 0.05 | 0.125 | 0.03 | 0.05 | 0.025 |

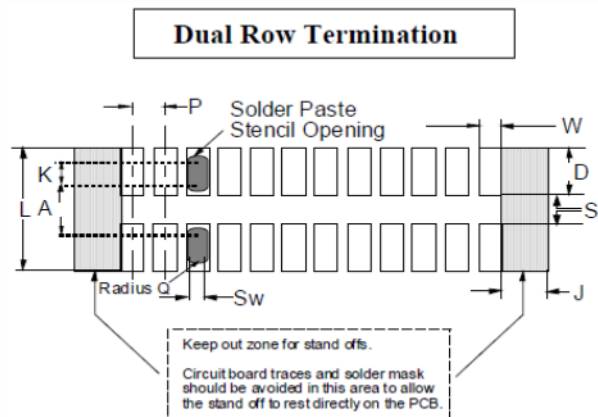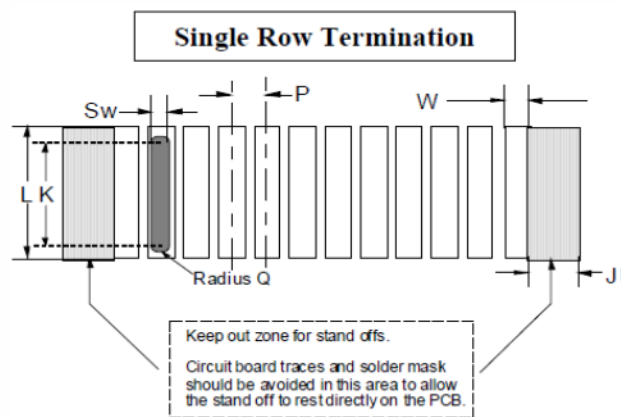

SRT Solder Stencil Opening

| 752, SRT | | Dimensions | | | |
|----------|------|------------|-------|----|-------|
| | | K | Sw | A | Q |
| 4 mil | mm | 2.40 | 0.76 | NA | 0.38 |
| | inch | 0.095 | 0.03 | NA | 0.015 |
| 6 mil | mm | 1.90 | 0.63 | NA | 0.33 |
| | inch | 0.075 | 0.025 | NA | 0.012 |

DRT Solder Stencil Opening


| 752, DRT | | Dimensions | | | |
|----------|------|------------|-------|-------|-------|
| | | K | Sw | A | Q |
| 4 mil | mm | 0.66 | 0.76 | 1.52 | 0.38 |
| | inch | 0.026 | 0.03 | 0.06 | 0.015 |
| 6 mil | mm | 0.51 | 0.63 | 1.40 | 0.33 |
| | inch | 0.02 | 0.025 | 0.055 | 0.012 |

Packaging

Tape and Reel Information

| Reel Diameter | 180mm [7"] | 330mm [13"] |
|----------------|---------------|----------------|
| Parts Per Reel | 1,000 | 3,000 |
| Pitch | 4mm | 4mm |
| Carrier Width | 24mm | 24mm |
| Material | Plastic | Plastic |

1. See Ordering Information for packaging code

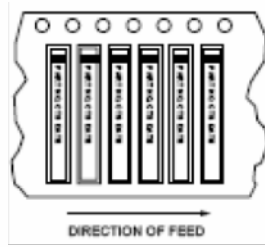

Bulk In Bag

- Standard quantity is 250pcs. per bag.



Addendum

Standard EIA Codes and Resistor Values – E-24 [3-Digit Resistor Code for G, F & D Tolerances]

| CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS |
|-------------------|------|------|------|------|-------|------|--------|------|---------|------|-----------|
| 000X ¹ | 0 | 680 | 68 | 511 | 510 | 392 | 3,900 | 303 | 30,000 | 224 | 220,000 |
| 100 | 10 | 750 | 75 | 561 | 560 | 432 | 4,300 | 333 | 33,000 | 244 | 240,000 |
| 110 | 11 | 820 | 82 | 621 | 620 | 472 | 4,700 | 363 | 36,000 | 274 | 270,000 |
| 120 | 12 | 910 | 91 | 681 | 680 | 512 | 5,100 | 393 | 39,000 | 304 | 300,000 |
| 130 | 13 | 101 | 100 | 751 | 750 | 562 | 5,600 | 433 | 43,000 | 334 | 330,000 |
| 150 | 15 | 111 | 110 | 821 | 820 | 622 | 6,200 | 473 | 47,000 | 364 | 360,000 |
| 160 | 16 | 121 | 120 | 911 | 910 | 682 | 6,800 | 513 | 51,000 | 394 | 390,000 |
| 180 | 18 | 131 | 130 | 102 | 1,000 | 752 | 7,500 | 563 | 56,000 | 434 | 430,000 |
| 200 | 20 | 151 | 150 | 112 | 1,100 | 822 | 8,200 | 623 | 62,000 | 474 | 470,000 |
| 220 | 22 | 161 | 160 | 122 | 1,200 | 912 | 9,100 | 683 | 68,000 | 514 | 510,000 |
| 240 | 24 | 181 | 180 | 132 | 1,300 | 103 | 10,000 | 753 | 75,000 | 564 | 560,000 |
| 270 | 27 | 201 | 200 | 152 | 1,500 | 113 | 11,000 | 823 | 82,000 | 624 | 620,000 |
| 300 | 30 | 221 | 220 | 162 | 1,600 | 123 | 12,000 | 913 | 91,000 | 684 | 680,000 |
| 330 | 33 | 241 | 240 | 182 | 1,800 | 133 | 13,000 | 104 | 100,000 | 754 | 750,000 |
| 360 | 36 | 271 | 270 | 202 | 2,000 | 153 | 15,000 | 114 | 110,000 | 824 | 820,000 |
| 390 | 39 | 301 | 300 | 222 | 2,200 | 163 | 16,000 | 124 | 120,000 | 914 | 910,000 |
| 430 | 43 | 331 | 330 | 242 | 2,400 | 183 | 18,000 | 134 | 130,000 | 105 | 1,000,000 |
| 470 | 47 | 361 | 360 | 272 | 2,700 | 203 | 20,000 | 154 | 150,000 | | |
| 510 | 51 | 391 | 390 | 302 | 3,000 | 223 | 22,000 | 164 | 160,000 | | |
| 560 | 56 | 431 | 430 | 332 | 3,300 | 243 | 24,000 | 184 | 180,000 | | |
| 620 | 62 | 471 | 470 | 362 | 3,600 | 273 | 27,000 | 204 | 200,000 | | |

1. Include "X" in tolerance code.



Addendum

Dual Terminator Resistor Values [Schematic 5 – 4-Digit Resistor Code]

The 752 Series part number includes the EIA Code value of the Thevenin equivalent resistances of R₁ and R₂.

The Thevenin equivalent resistance is calculated using the following formula; $R_{EQ} = R_1 * R_2 / (R_1 + R_2)$.

| R1 [ohms] | R2 [ohms] | Thevenin Equivalent [ohms] | CTS Resistor Code | R1 [ohms] | R2 [ohms] | Thevenin Equivalent [ohms] | CTS Resistor Code | R1 [ohms] | R2 [ohms] | Thevenin Equivalent [ohms] | CTS Resistor Code | R1 [ohms] | R2 [ohms] | Thevenin Equivalent [ohms] | CTS Resistor Code |
|-----------|-----------|----------------------------|-------------------|-----------|-----------|----------------------------|-------------------|-----------|-----------|----------------------------|-------------------|-----------|-----------|----------------------------|-------------------|
| 22 | 50 | 15 | 150A | 118 | 178 | 71 | 710A | 240 | 620 | 173 | 171C | 680 | 1,500 | 468 | 471A |
| 25 | 50 | 17 | 170A | 120 | 120 | 60 | 600B | 250 | 250 | 125 | 131B | 715 | 240 | 180 | 181B |
| 30 | 50 | 19 | 190A | 120 | 150 | 67 | 670C | 260 | 162 | 100 | 101G | 750 | 750 | 375 | 381A |
| 30 | 620 | 29 | 290A | 120 | 180 | 72 | 720A | 270 | 130 | 88 | 880B | 750 | 2,300 | 566 | 571A |
| 33 | 680 | 31 | 310A | 120 | 200 | 75 | 750B | 270 | 180 | 108 | 111C | 780 | 390 | 260 | 261A |
| 33 | 4,700 | 33 | 330A | 120 | 220 | 78 | 780B | 270 | 270 | 135 | 141A | 820 | 560 | 333 | 331B |
| 36 | 620 | 34 | 340A | 121 | 195 | 75 | 750C | 270 | 470 | 171 | 171A | 1,000 | 1,000 | 500 | 501A |
| 38 | 125 | 29 | 290B | 122 | 253 | 82 | 820A | 271 | 131 | 88 | 880A | 1,000 | 1,500 | 600 | 601B |
| 43 | 620 | 40 | 400A | 130 | 210 | 80 | 800A | 330 | 220 | 132 | 131D | 1,000 | 2,000 | 667 | 671A |
| 47 | 68 | 28 | 280A | 133 | 154 | 71 | 710B | 330 | 330 | 165 | 171B | 1,000 | 2,200 | 688 | 691A |
| 47 | 270 | 40 | 400B | 150 | 150 | 75 | 750A | 330 | 390 | 179 | 181A | 1,000 | 3,300 | 767 | 771A |
| 65 | 90 | 38 | 380A | 150 | 180 | 82 | 820B | 330 | 470 | 194 | 191A | 1,100 | 820 | 470 | 471B |
| 68 | 189 | 50 | 500B | 150 | 1,000 | 130 | 131E | 330 | 680 | 222 | 221A | 1,100 | 2,200 | 733 | 731A |
| 75 | 620 | 67 | 670A | 160 | 240 | 96 | 960A | 330 | 3,900 | 304 | 301A | 1,200 | 1,200 | 600 | 601A |
| 80 | 220 | 59 | 590A | 160 | 260 | 99 | 990A | 360 | 390 | 187 | 191B | 1,500 | 1,500 | 750 | 751A |
| 81 | 130 | 50 | 500A | 160 | 270 | 100 | 101D | 360 | 600 | 225 | 231A | 1,500 | 3,300 | 1,031 | 102A |
| 81 | 220 | 59 | 600C | 160 | 440 | 117 | 121D | 360 | 720 | 240 | 241B | 2,000 | 1,000 | 667 | 671B |
| 81 | 330 | 65 | 650B | 162 | 260 | 100 | 101B | 390 | 620 | 239 | 241A | 2,000 | 2,000 | 1,000 | 102B |
| 81 | 2,200 | 78 | 780A | 180 | 220 | 99 | 101A | 400 | 200 | 133 | 131F | 2,200 | 3,300 | 1,320 | 132A |
| 82 | 120 | 49 | 490A | 180 | 240 | 103 | 101F | 400 | 600 | 240 | 241C | 2,200 | 4,400 | 1,467 | 152A |
| 82 | 130 | 50 | 500D | 180 | 270 | 108 | 111A | 470 | 330 | 194 | 191C | 2,200 | 5,600 | 1,579 | 162A |
| 83 | 128 | 50 | 500C | 180 | 300 | 113 | 111B | 470 | 680 | 278 | 281C | 3,000 | 2,000 | 1,200 | 122A |
| 95 | 156 | 59 | 590B | 180 | 390 | 123 | 121A | 470 | 940 | 313 | 311A | 3,000 | 6,200 | 2,022 | 202A |
| 100 | 75 | 43 | 430A | 180 | 470 | 130 | 131C | 470 | 1,000 | 320 | 321A | 3,300 | 4,700 | 1,939 | 192A |
| 100 | 82 | 45 | 450A | 182 | 245 | 104 | 101E | 500 | 500 | 250 | 251A | 3,900 | 3,300 | 1,788 | 182A |
| 100 | 100 | 50 | 500E | 200 | 100 | 67 | 670D | 510 | 760 | 305 | 311B | 4,400 | 2,200 | 1,467 | 152B |
| 100 | 150 | 60 | 600A | 200 | 270 | 115 | 121C | 560 | 390 | 230 | 231B | 4,700 | 4,700 | 2,350 | 242A |
| 100 | 175 | 64 | 640A | 200 | 1,500 | 176 | 171D | 560 | 820 | 333 | 331A | 4,700 | 22,000 | 3,873 | 392A |
| 100 | 200 | 67 | 670B | 220 | 220 | 110 | 111D | 560 | 910 | 347 | 351A | 5,000 | 5,000 | 2,500 | 252A |
| 100 | 220 | 69 | 690A | 220 | 270 | 121 | 121B | 560 | 1,000 | 359 | 361A | 6,800 | 22,000 | 5,194 | 522A |
| 100 | 430 | 81 | 810A | 220 | 330 | 132 | 131A | 620 | 820 | 353 | 351B | 10,000 | 20,000 | 6,667 | 672A |
| 106 | 169 | 65 | 650A | 220 | 470 | 150 | 151A | 620 | 910 | 369 | 371A | 10,000 | 51,000 | 8,361 | 842A |
| 110 | 91 | 50 | 500F | 220 | 1,800 | 196 | 201A | 660 | 990 | 396 | 401B | 50,000 | 100,000 | 33,333 | 333A |
| 110 | 220 | 73 | 730A | 240 | 170 | 100 | 101C | 680 | 1,000 | 405 | 401A | 360,000 | 390,000 | 187,200 | 194A |

1. Resistor tolerances are ±2%.

2. Suffix letter in CTS Code has no significance, assigned in sequential order.