

FT9HV

(Former FOX801BHCLF)


11.4mm x 9.6mm
 HCMOS, VCTCXO **FOX**

Features

- 3.3V Operation
- 2.0mm Height Max
- HCMOS Output
- Low Cost
- Tape and Reel (1,000 pcs. STD)

ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (F ₀)	9.600 ~ 56.000 MHz
Temperature Range	
Operating (T _{OPR})	-30°C ~ +75°C
Storage (T _{STG})	-40°C ~ +85°C
Initial Frequency Tolerance (@25°C) (V _C = 1.65V ¹)	±2.0 PPM
Frequency Stability ref @ 25°C Over Operating Temp Range	±2.5 PPM
Pull ability (V _C = 1.65 ± 1.35V ¹)	±20 PPM Min
Supply Voltage (V _{DD})	3.3V ± 5%
Control Voltage (V _C) ¹	1.65V ± 1.35V
Input Current (I _{DD})	
9.600 ~ 21.999MHz	15mA
21.999+ ~ 56.000MHz	20mA
Output Symmetry (50% V _{DD})	40% ~ 60%
Rise Time (10% ~ 90% V _{DD}) (T _R)	7nS
Fall Time (90% ~ 10% V _{DD}) (T _F)	7nS
Output Voltage	
Output Low (V _{OL})	10%V _{DD}
Output High (V _{OH})	90%V _{DD} Min
Output Current	
(I _{OL})	2mA Min
(I _{OH})	2mA Min
Output Load	15pF Nom
Start-up Time (T _S)	10 mS

¹ For proper operation, a control voltage (V_C) must be applied to pin 1.

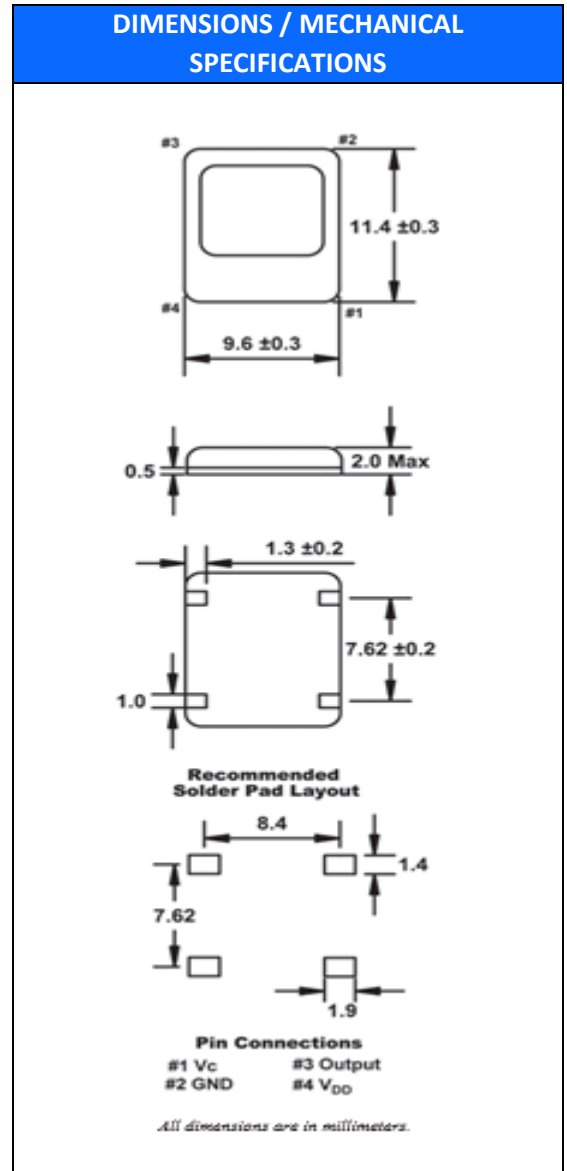

FT9HV


(Former FOX801BHCLF)

11.4mm x 9.6mm

HCMOS, VCTCXO



TAPE SPECIFICATIONS (mm)							REEL SPECIFICATIONS (mm)								
MODEL	A	B	C	D	E	F	REEL QTY	MODEL	G	H	I	J	K	L	M
FOX801BHCLF	Ø1.5	4.0	12.0	11.5	24.0	2.7	1,000	FOX801BHCLF	2.0	Ø13	Ø21	Ø80	Ø330	25.5	1.6

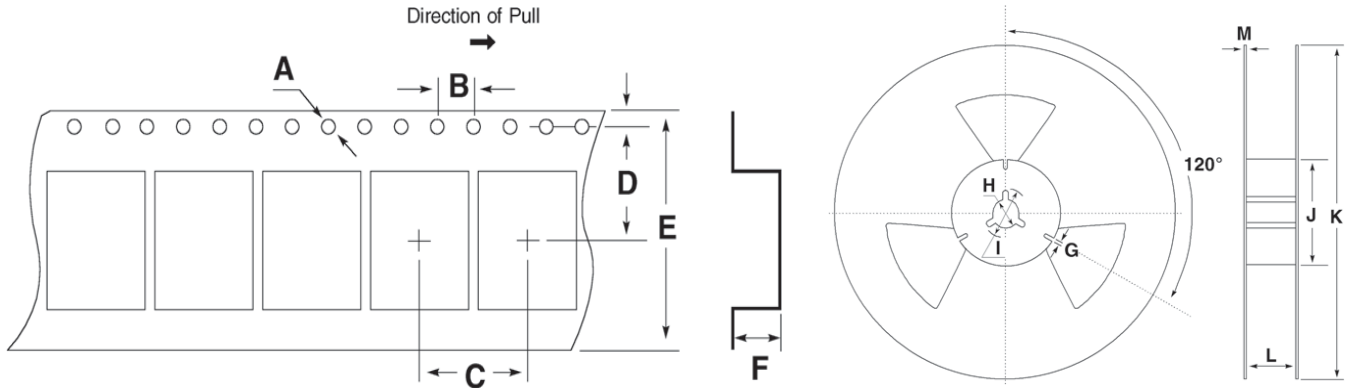

Available Options & Part Identification for VCTCXO Model T9HV¹

Sample PN: **FT9HVDKH25.0-T1**

F	T9HV	D	K	H	25.0	-T1
Fox	Model Number T9HV = VCTCXO	Voltage D = +3V±5% P = +5V±5%	Stability P = ±2.5 PPM	Operating Temperature H = -30 to +75°C	Frequency (MHz)	Values Added Options Blank = Bulk T1 = 1,000 pcs

Reliability Test Conditions

Please contact Abracon Quality Assurance department