




Picture differs from the item.

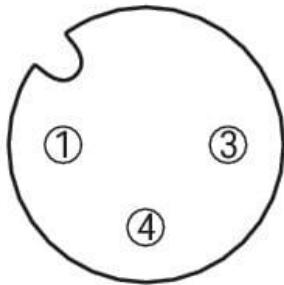

Pin 1 ... 4: 0.25 mm^2

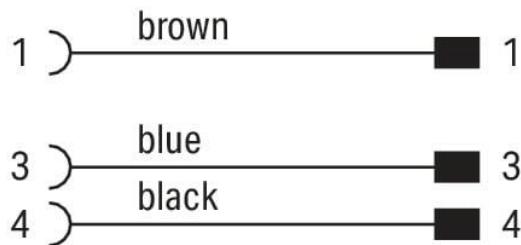

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- Good resistance to microbes, hydrolysis, oil, chemicals and UV radiation.
- Good chemical resistance.
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

Data

Technical data

General

Operating voltage	AC/DC 60 V
Operating current	4 A
Rated surge voltage	1.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	2 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	3.9 ... 4.3 mm

Connector

Connection type	M12 Socket - M8 plug
Cable connection direction to mating direction	90 °
Cable connection direction to mating direction (2)	90 °

Subject to changes. Please also observe the further product documentation!

Connector interface coding (cable/adapter) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	0.6 ... 1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918974868
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	4b7173c5-9b41-4cf2-b87a-b0d92bac85f2
SCIP notification number (Belgium)	95872a26-a2e1-4c06-8876-5f0099cb51e8
SCIP notification number (Bulgaria)	826f3a51-013d-4a03-96b4-58e27812e62e
SCIP notification number (Czech Republic)	8f79ccac-0c48-428b-8e52-e978b5de56e8
SCIP notification number (Denmark)	d77669ad-5676-4df4-af61-963525ab561c
SCIP notification number (Finland)	deb2fd4b-8de7-4e0e-bbdc-3d4447ee15ec
SCIP notification number (France)	573aa968-2e8d-4ee5-b02d-1c0ad9009a09
SCIP notification number (Germany)	b6c6dfe5-41b6-479f-a6dd-46f65c125b13
SCIP notification number (Hungary)	41e73f6a-0f21-4a02-931c-c58e51be48c3
SCIP notification number (Italy)	21c134b3-bcbd-4b78-94c6-2f5be83c3ba8
SCIP notification number (Netherlands)	407ea715-4148-4526-bbb4-6fd92af85dca
SCIP notification number (Poland)	c9f1a6e0-0beb-46bf-9d8e-e37b9cc782de
SCIP notification number (Romania)	1544cd1e-5629-45cb-8612-0bce219733a5
SCIP notification number (Sweden)	44c3f7b8-51f8-4a17-9bf4-6365d497d1fa

Subject to changes. Please also observe the further product documentation!

Downloads

Documentation

Bid Text

756-5504/030-020 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
756-5504/030-020 doc - Datei	2017 Sep 20	doc 26.6 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	--------------------------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5504/030-020	URL	Download
WSCAD Universe 756-5504/030-020	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5504/030-020 Sensor/Actuator cable; M12A socket; angled; M8 plug; angled; 3-pole; Length: 2 m	URL	Download
---	-----	--------------------------

Installation Notes

Subject to changes. Please also observe the further product documentation!