



REVISIONS				
REV	ECR	DESCRIPTION	DRAWN	DATE
1		ENGINEERING RELEASE	P. BURDGE	11/10/2020

-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.37-IPX4LLK-SAF3GT-6IN (6 INCHES)  
 CB1.37-IPX4LLK-SAF3GT-10IN (10 INCHES)

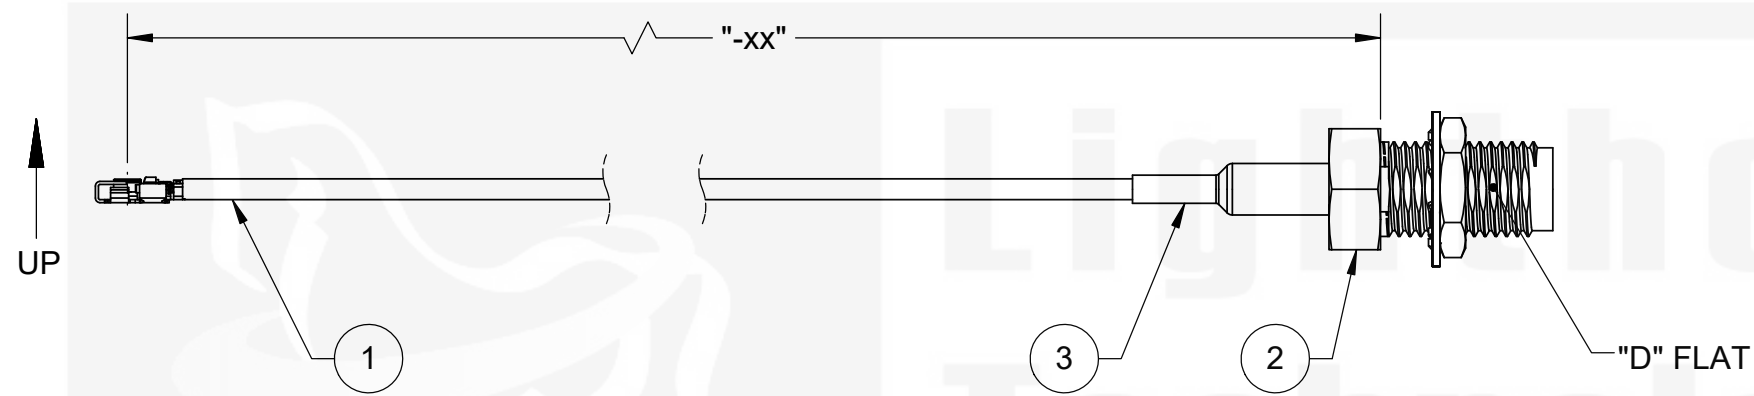


ITEM	PART NUMBER	DESCRIPTION	QTY
1	IPX4LLK-137	IPX4L (MHF4L), LOCKING, 1.13MM COAX	1
2	SASF13RGT-316	SMA, JACK, BLKHD, CABLE CRIMP	1
3	1635F-1/8"	.125 (1/8) DIA, .75 LENGTH, GREEN	1

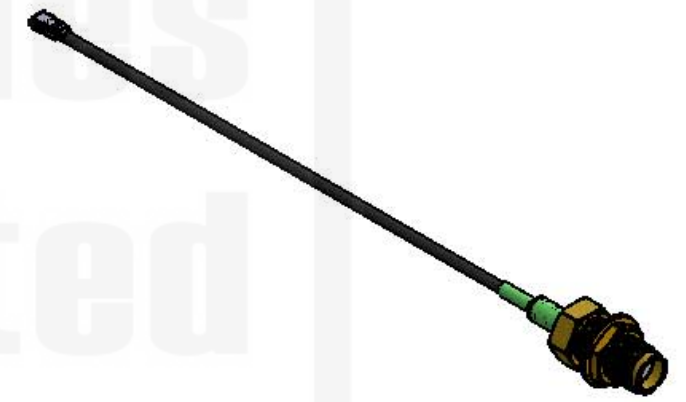

SCALE: NONE

IPX® AND MHF® ARE REGISTERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING		 <b>Lighthouse Technologies</b> San Diego, CA WWW.RFCONNECTOR.COM	
TOLERANCES UNLESS OTHERWISE SPECIFIED			
DIMENSIONS ARE IN MILLIMETERS X = ±0.5 X.X = ±0.25 X.XX = ±0.13 ANGLE = ±30'		TITLE: CABLE ASSEMBLY, I-PEX LOCKING, (MHF4L) R/A JACK, CRIMP TO SMA, JACK, REAR BULKHEAD MNT, 1.37MM COAX	
CUSTOMER APPROVAL SIGN / DATE:		SIZE	REV
ENG APPR.		<b>B</b>	<b>1</b>
CHECKED		PART/DWG. NO: <b>CB1.37-IPX4LLK-SAF3GT-xxIN</b>	
DRAWN	P. BURDGE	SCALE: 2:1	FILE NAME
	NAME	DATE	11-10-2020
		SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPYRIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

