

CFP2-WDM-DET-1HL-C

Cisco® CFP2-WDM-DET-1HL Compatible TAA 100/200GBase-DCO CFP2 Transceiver (SMF, 1528.77nm to 1568.36nm, 80km, LC)

Features:

- CFP Multi-Source Agreement Compliant
- Hot pluggable CFP2 footprint
- Supports CAUI-4 for 100GE and CEI-28G-VSR for OTU4 Host Interface
- Proprietary Internal Soft-Decision Forward Error Correction (SD-FEC)
- Single-mode Fiber
- Tunable C-band Transmitter
- Tunable Optical Filter (TOF)
- Coherent Receiver
- Single-mode Fibre
- Operating temperature range 0C to 70C
- Power Consumption < 19W



Applications:

- 200GBase Ethernet
- Access and Enterprise

Product Description

This Cisco® CFP2-WDM-DET-1HL compatible CFP2 transceiver provides 200GBase-DWDM throughput up to 80km over single-mode fiber (SMF) using a wavelength of 1528.77nm to 1568.36nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Cisco® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. It is built to meet or exceed the specifications of Cisco®, as well as to comply with MSA (Multi-Source Agreement) standards to ensure seamless network integration. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Storage Temperature	Ts	-40		85	°C	
Operating Case Temperature	Tc	0		70	°C	
Relative Humidity (non-condensing)	RH			85	%	
Supported Host Signal Types			103.125		Gbps	1
			111.81		Gbps	2

Note:

1. 100GE as per IEEE 802.3ba. The line format can be selected as OTU4 (G.709 HD-FEC) or with SD-FEC (proprietary)
2. OTU4 as per ITU-T G.709. The line format can be selected as OTU4 (transparent) or with S-DFEC (proprietary)

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.2	3.3	3.4	V	
Power Supply Current	Icc			6	A	
Power Dissipation	PD			19	W	


Optical Characteristics

Parameter	Min.	Typ.	Max.	Unit	Notes
Transmitter					
Average Output Power	-15		1	dBm	1, 2
Output Power Accuracy and Stability	-1		1	dB	2, 3
Centre Wavelength Range	1528.77		1567.54	nm	
Frequency Grid Setting		50		GHz	4
Centre Wavelength	$\lambda_T - 15$	λ_T	$\lambda_T + 15$	pm	4
Receiver					
Receiver Operating Wavelength	1528.77		1567.54	nm	
Receiver Input Power Range	-18		0	dBm	5
Receiver Sensitivity			-25	dBm	6
OSNR Tolerance		11.5		dB/0.1nm	7, 8
		17		dB/0.1nm	7, 9
		20		dB/0.1nm	7, 10
Chromatic Dispersion Tolerance			40	ns/nm	8
			20	ns/nm	9, 10

Notes:

1. The output power is settable in steps of 0.1 dB within the specified wavelength range
2. Output power coupled into a 9/125 μm single mode fibre
3. Difference between the set value and actual value
4. Per ITU-T G.694.1 grid definition
5. An input power in this range guarantees optimum OSNR performance
6. Minimum input power needed to achieve post-FEC BER $\leq 10^{-15}$ (OSNR > 35dB, SD-FEC enabled)
7. Post-FEC BER $\leq 10^{-15}$, SD-FEC enabled
8. 100G QPSK, post-FEC BER $\leq 10^{-15}$, SD-FEC enabled
9. 200G 8QAM, post-FEC BER $\leq 10^{-15}$, SD-FEC enabled
10. 200G 16QAM, post-FEC BER $\leq 10^{-15}$, SD-FEC enabled

Electrical Pad Layout

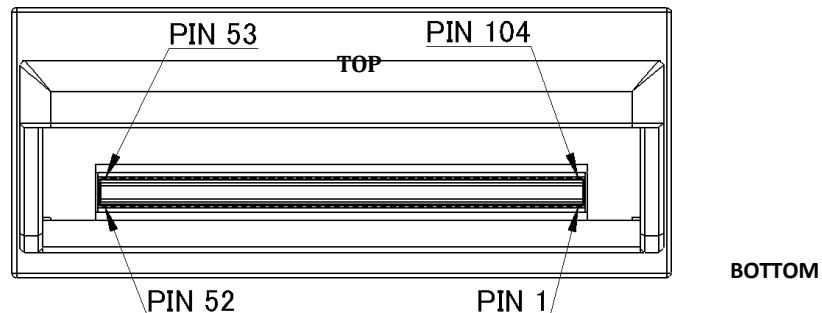


Pin Descriptions

Pin	Symbol	I/O	Description	Logic	Pin	Symbol	I/O	Description	Logic		
1	GND		Ground		53	GND		Ground			
2	OHIO_RDn	O	Overhead extraction		54	RX7p	O	Ch7 25Gbps Receive Output	CML		
3	OHIO_RDp				55	RX7n					
4	GND		Ground		56	GND		Ground			
5	OHIO_TDn	I	Overhead insertion		57	RX0p	O	Ch0 25Gbps Receive Output	CML		
6	OHIO_TDp				58	RX0n					
7	3.3V_GND		3.3V Power Supply		59	GND		Ground			
8	3.3V_GND				60	RX1p	O			Ch1 25Gbps Receive Output	CML
9	3.3V				61	RX1n					
10	3.3V				62	GND				Ch6 25Gbps Receive Output	CML
11	3.3V				63	RX6p	O				
12	3.3V				64	RX6n					
13	3.3V_GND		Ground		65	GND		Ground			
14	3.3V_GND				66	RX5p	O			Ch5 25Gbps Receive Output	CML
15	VND_IO_A		Do not connect		67	RX5n		Ground			
16	VND_IO_B				68	GND					
17	PRG_CNTL1	I	Programmable Control 1	LVCMOS w/ PUR	69	RX2p	O	Ch2 25Gbps Receive Output	CML		
18	PRG_CNTL2		Programmable Control 2		70	RX2n					
19	PRG_CNTL3		Programmable Control 3		71	GND				Ground	
20	PRG_ALRM1	O	Programmable Alarm 1	LVCMOS	72	RX3p	O	Ch3 25Gbps Receive Output	CML		
21	PRG_ALRM2		Programmable Alarm 2		73	RX3n					
22	PRG_ALRM3		Programmable Alarm 3		74	GND				Ground	
23	GND		Ground	75	RX4p						
24	TX_DIS	I	Transmitter Disable	LVC MOS w/ PUR	76	RX4n	O	Ch4 25Gbps Receive Output	CML		
25	RX_LOS	O	Loss of Optical Input Signal	LVC MOS	77	GND				Ground	
26	MOD_LOPWR	I	Module Low Power Mode	LVC MOS w/ PUR	78	REFCLKp		Not Used			
27	MOD_ABS	O	Module Absent Indicator	GND	79	REFCLKn					
28	MOD_RSTn	I	Module Reset	LVC MOS w/ PDR	80	GND		Ground			
29	GLB_ALRMn	O	Global Alarm	LVC MOS (open drain)	81	TX7p	I	Ch7 25Gbps Transmit Input	CML		
30	GND		Ground		82	TX7n					
31	MDC	I	Management Data Clock	1.2V CMOS	83	GND		Ground			
32	MDIO	I/O	Management bi-dir. Data	1.2V CMOS	84	TX0p		Ch0 25Gbps Transmit Input	CML		
33	PRTADR0	I	MDIO Physical Port addr. bit0	1.2V CMOS	85	TX0n	I				
34	PRTADR1		MDIO Physical Port addr. bit1		86	GND		Ground			
35	PRTADR2		MDIO Physical Port addr. bit2		87	TX1p	I			Ch1 25Gbps Transmit Input	CML

36	VND_IO_C		Do not connect		88	TX1n			
37	VND_IO_D				89	GND		Ground	
38	VND_IO_E				90	TX6p	I	Ch6 25Gbps Transmit Input	CML
39	3.3V_GND		Ground		91	TX6n			
40	3.3V_GND		Ground		92	GND		Ground	
41	3.3V		3.3V Power Supply		93	TX5p	I	Ch5 25Gbps Transmit Input	CML
42	3.3V				94	TX5n			
43	3.3V				95	GND		Ground	
44	3.3V				96	TX2p	I	Ch2 25Gbps Transmit Input	CML
45	3.3V_GND		Ground		97	TX2n			
46	3.3V_GND				98	GND		Ground	
47	OHIO_REFCLKn	I	Overhead I/O Reference Clock		99	TX3p	I	Ch3 25Gbps Transmit Input	CML
48	OHIO_REFCLKp				100	TX3n			
49	GND		Ground		101	GND		Ground	
50	RX_MCLKn		Not for normal use		102	TX4p	I	Ch4 25Gbps Transmit Input	CML
51	RX_MCLKp				103	TX4n			
52	GND		Ground		104	GND		Ground	

Mechanical Specifications

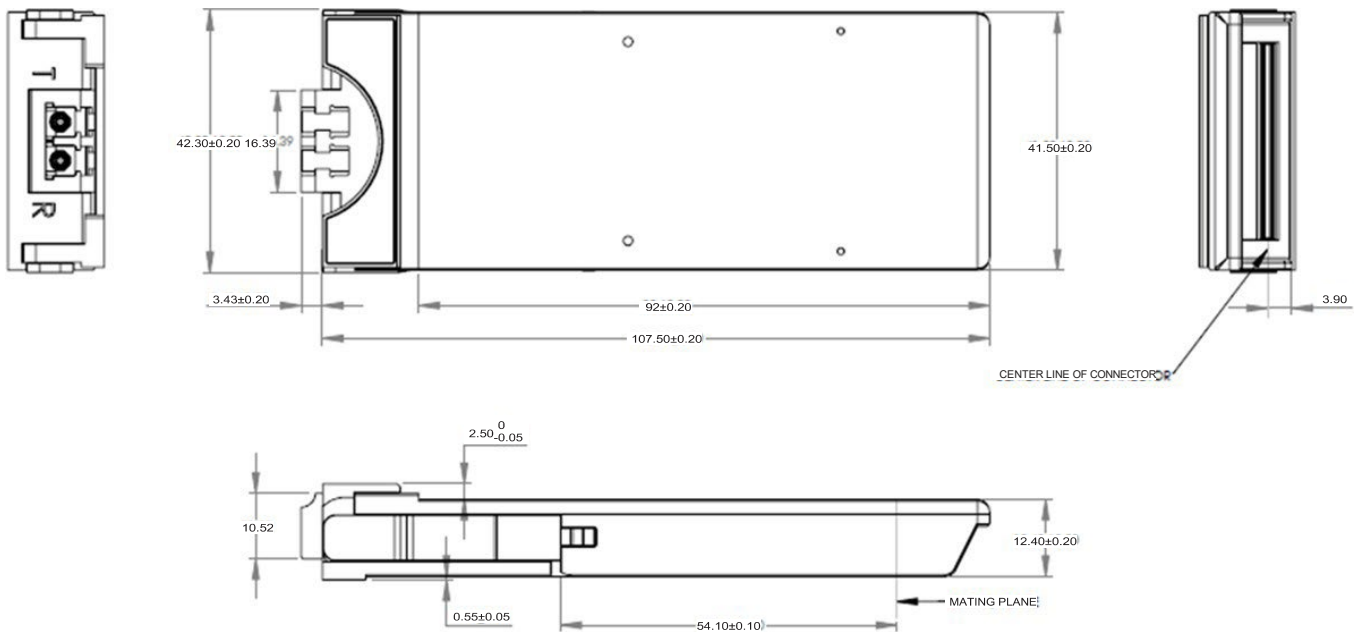

About ProLabs

Our experience comes as standard; for over 15 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with over 90 optical switching and transport platforms.

Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 400G while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure that you get immediate answers to your questions and compatible product when needed. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



Contact Information

ProLabs US

Email: sales@prolabs.com

Telephone: 952-852-0252

ProLabs UK

Email: salessupport@prolabs.com

Telephone: +44 1285 719 600