



.XX ±0.13 .XXX ±0.05



ISSUE NUMBER	
ORIGINAL	(1)

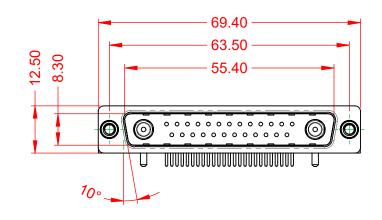




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


OPERATING TEMPERATURE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING:10A (CURRENT)(IF PRESENT)SIGNAL CONTACT CURRENT RATING:5A PER CONTACTSIGNAL CONTACT RESISTANCE:10mΩ MAX.INSULATOR RESISTANCE:5000MΩ min.DIELECTRIC5000MΩ min.

DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY		
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/201	9	
			CHECKED:	DATE:	
)	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
S YOUR CONNECTION	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-27W2250-1N6		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-27W2	2250-1N6	1

-55°C ~ 125°C

COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

