
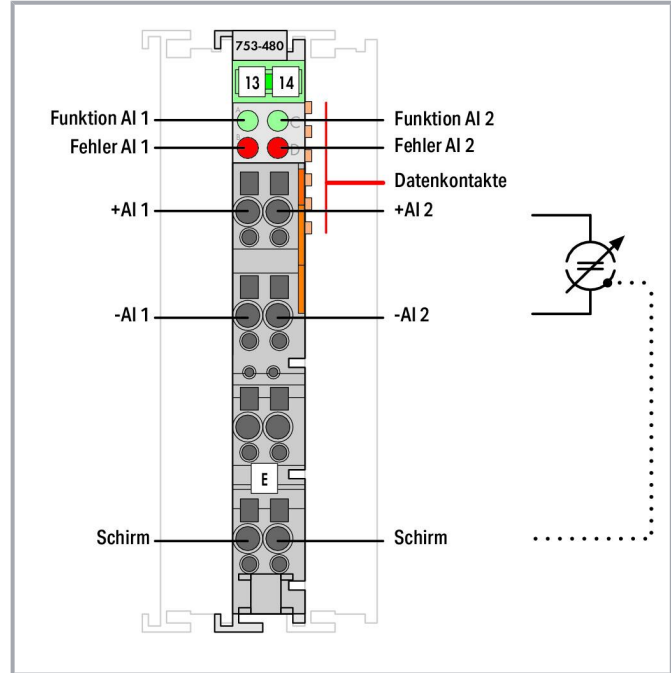


Data sheet | Item number: 753-480

2-channel analog input; 0 ... 20 mA; Differential input



[www.wago.com/753-480](http://www.wago.com/753-480)

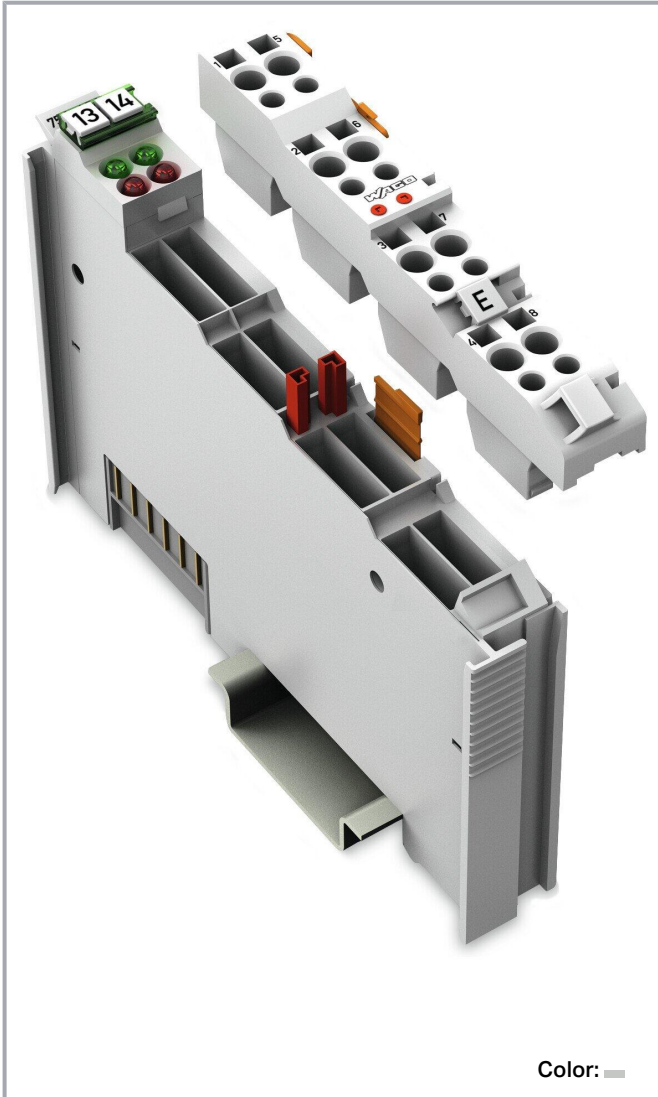

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

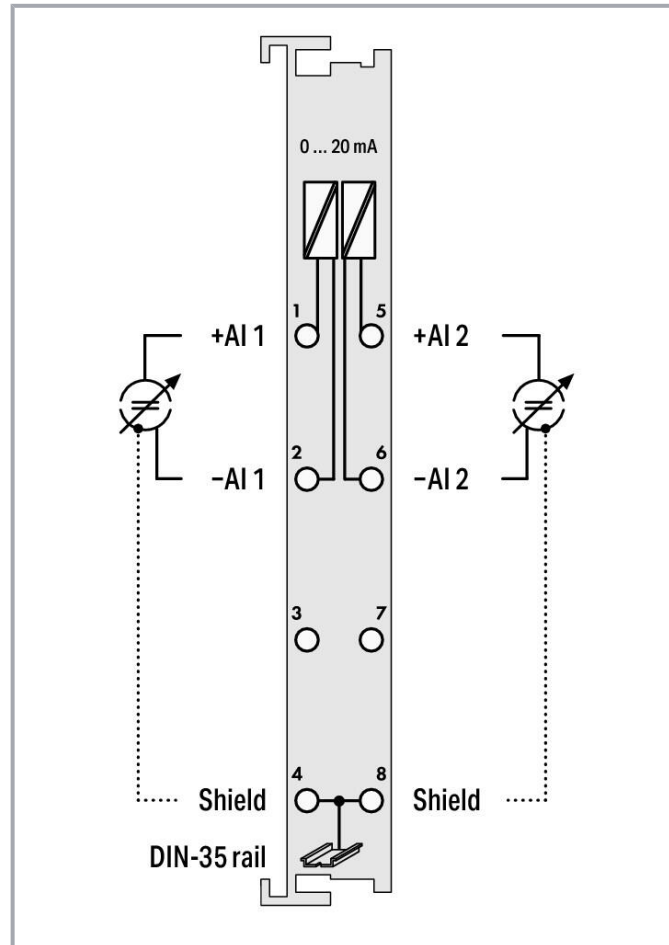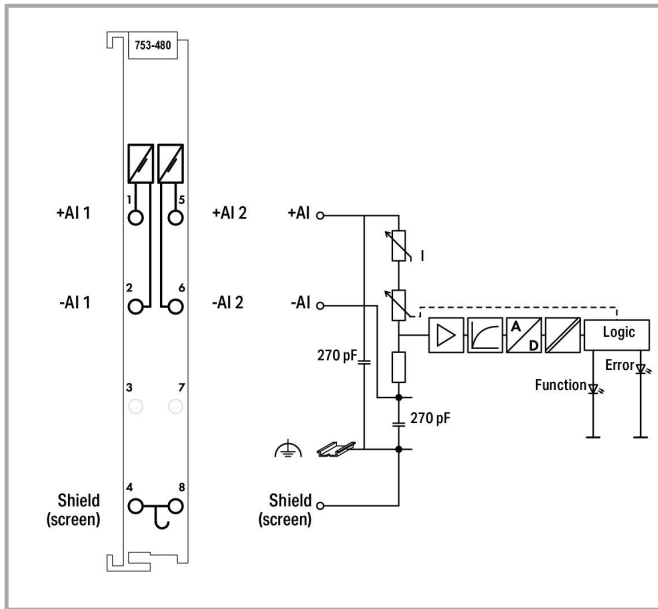

## Item description

This 2-channel analog input module processes differential signals ranging from 0 to 20 mA.

The input signal of each channel is electrically isolated and is transmitted with a resolution of 13 bits.

The system supply powers the module.

The shield directly connects to the DIN-rail.

- Measured value acquisition: Time synchronous within the module
- Measurement range overflow/underflow: Status byte and LED
- Conversion method: SAR (Successive Approximation Register)
- Operating mode: Continuously sampling (default)
- Protection: Non-linear limiting

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



## Data Notes

|      |  |
|------|--|
| Note | Pluggable connectors and coding fingers (753 Series) are not included. |
|------|--|

## Technical data

|  |  |
|--|--|
| Number of analog inputs  | 2  |
| Total number of channels (module)                              | 2  |
| Signal type  | Current  |
| Signal type (current)  | 0 ... 20 mADC  |
| Sensor connection  | 2 x (2-wire)   |
| Input filter   | Low pass (1st order), $f_G = 5 \text{ kHz}$          |
| Signal characteristics   | Differential   |
| Resolution [bit]   | 13 bits  |
| Operating mode   | Continuously sampling (default)                      |
| Input resistance (max.)  | 270 $\Omega$   |
| Data width   | 2 x 16-bit data; 2 x 8-bit control/status (optional) |
| Protection   | Non-linear limiting                                  |
| Admissible continuous overload                                 | 30 V   |
| Crosstalk attenuation  | 80 dB  |
| Monotonicity without error code                                | yes  |
| Measurement error (reference temperature)                      | 25 $^{\circ}\text{C}$                                |
| Measurement error, deviation (max.) from the upper-range value | 0.05 %   |
| Measurement error over entire temperature range                | $\leq 0.4 \%$  |
| Temperature error (max.) of the upper-range value              | 0.01 %/K   |
| Sampling duration  | 5 $\mu\text{s}$                                      |
| Sampling delay (channel/channel)                               | 1 $\mu\text{s}$                                      |
| Sampling delay (module)  | 1 ms   |
| Sampling repetition time                                       | 1 ms   |
| Measurement range overflow/underflow                           | Status byte and LED                                  |
| Measured value acquisition                                     | Time synchronous within the module                   |
| Value of the least significant bit (LSB)                       | 2.4 $\mu\text{A}$                                    |
| Conversion method  | SAR (Successive Approximation Register)              |
| Supply voltage (system)  | 5 VDC; via data contacts                             |
| Current consumption (5 V system supply)                        | 80 mA  |

Subject to changes. Please also observe the further product documentation!



|            |   |
|------------|---|
| Isolation  | 500 V system/field or channel/channel                                   |
| Indicators | LED (A, C) green: Function AI 1, AI 2; LED (B, D) red: Error AI 1, AI 2 |

### Connection data

|                                       |  |
|---------------------------------------|--|
| Connection technology: inputs/outputs | 8 x CAGE CLAMP®                              |
| Connection type 1                     | Inputs/Outputs                               |
| Solid conductor                       | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor               | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                          | 9 ... 10 mm / 0.35 ... 0.39 inches           |

### Physical data

|                                   |                        |
|-----------------------------------|------------------------|
| Width                             | 12 mm / 0.472 inches   |
| Height                            | 100 mm / 3.937 inches  |
| Depth                             | 69.8 mm / 2.748 inches |
| Depth from upper-edge of DIN-rail | 62.6 mm / 2.465 inches |

### Mechanical Data

|                     |             |
|---------------------|-------------|
| Mounting type       | DIN-35 rail |
| Pluggable connector | Pluggable   |

### Material Data

|                    |                              |
|--------------------|------------------------------|
| Color              | light gray                   |
| Housing material   | Polycarbonate; polyamide 6.6 |
| Fire load          | 0.882 MJ                     |
| Weight             | 43 g                         |
| Conformity marking | CE                           |

### Environmental requirements

|  |                                       |
|--|---------------------------------------|
| Ambient temperature (operation)          | 0 ... +55 °C                          |
| Ambient temperature (storage)            | -25 ... +85 °C                        |
| Protection type                          | IP20                                  |
| Pollution degree                         | 2 per IEC 61131-2                     |
| Operating altitude                       | 0 ... 2000 m / 0 ... 6562 ft          |
| Mounting position                        | horizontal (standing/lying); vertical |
| Relative humidity (without condensation) | 95 %                                  |
| Vibration resistance                     | per IEC 60068-2-6                     |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



|  |                                       |
|--|---------------------------------------|
| Shock resistance   | 15g per IEC 60068-2-27                |
| EMC immunity to interference   | per EN 61000-6-2                      |
| EMC emission of interference   | per EN 61000-6-4                      |
| Exposure to pollutants   | Per IEC 60068-2-42 and IEC 60068-2-43 |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                |

### Commercial data

|                       |                 |
|-----------------------|-----------------|
| Product Group         | 15 (I/O System) |
| eCl@ss 10.0           | 27-24-26-01     |
| eCl@ss 9.0            | 27-24-26-01     |
| ETIM 8.0              | EC001596        |
| ETIM 7.0              | EC001596        |
| PU (SPU)              | 1 pcs           |
| Packaging type        | box             |
| Country of origin     | DE              |
| GTIN                  | 4044918937474   |
| Customs tariff number | 85389099990     |

### Environmental Product Compliance

|   |                                      |
|---|--------------------------------------|
| CAS-No.                                   | 7439-92-1                            |
| REACH Candidate List Substance            | Lead                                 |
| RoHS Compliance Status                    | Compliant,With Exemption             |
| RoHS Exemption                            | 7(a)<br>7(c)-I<br>7(c)-II            |
| SCIP notification number (Austria)        | deaf2653-06b7-475c-83da-24d393757c04 |
| SCIP notification number (Belgium)        | c46f8b0b-4df0-4375-b4b6-f47867004dab |
| SCIP notification number (Bulgaria)       | 0d22ad73-4743-48b1-930f-7c2c81e1feb0 |
| SCIP notification number (Czech Republic) | a6e6ae61-0613-4ae7-ac93-f4af65125b71 |
| SCIP notification number (Denmark)        | 2f83773f-b3a4-4b8a-8bde-8fcd62093f6e |
| SCIP notification number (Finland)        | c0b3ca6e-0e3f-4a62-a535-aa317904937a |
| SCIP notification number (France)         | 80b55785-1f4a-4266-b822-70f9217268ba |
| SCIP notification number (Germany)        | e81c8919-4bcf-4a83-8dae-ae7582ab1c67 |
| SCIP notification number (Hungary)        | bbc52fed-825d-4b92-a03a-9e61a938a86a |

Subject to changes. Please also observe the further product documentation!





WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



|  |                                      |
|--|--------------------------------------|
| SCIP notification number (Italy)       | 8ee8fe6c-219b-43c3-98a2-e91f23f23943 |
| SCIP notification number (Netherlands) | 63a34f44-73a5-4595-bfca-3e98963e364c |
| SCIP notification number (Poland)      | 3475e7b5-7555-48a6-a1e8-88089438f5f1 |
| SCIP notification number (Romania)     | aac46400-912d-4948-b90c-a473e872e200 |
| SCIP notification number (Sweden)      | 53365ce0-4d36-4c72-bd54-68ea038a3fdf |

## Approvals / Certificates


### General approvals

| Logo  | Approval   | Additional Approval Text | Certificate name                      |
|---|--|--------------------------|---------------------------------------|
|   | CCC<br>CNEX  | CNCA-C23-01              | 2020312310000213<br>(Ex ec IIC T4 Gc) |
|   | EAC<br>Brjansker Zertifizierungsstelle                       | TP TC 020/2011           | EAC RU C-DE.AM02.<br>B.00087/19       |
|    | KC<br>National Radio Research Agency                         | Article 58-2, Clause 3   | MSIP-REM-W43-<br>AIM750               |
|  | UL<br>Underwriters Laboratories Inc. (ORDINARY<br>LOCATIONS) | UL 508                   | E175199 Sec.1                         |

### Declarations of conformity and manufacturer's declarations

| Logo   | Approval   | Additional Approval Text | Certificate name |
|--|--|--------------------------|------------------|
|  | EU-Declaration of Conformity<br>WAGO GmbH & Co. KG | -                        | -                |
|  | UK-Declaration of Conformity<br>WAGO GmbH & Co. KG | -                        | -                |







### Approvals for hazardous areas

| Logo   | Approval                    | Additional Approval Text | Certificate name                                  |
|--|-----------------------------|--------------------------|---|
|  | ATEX<br>TUEV Nord Cert GmbH | EN 60079-0               | TUEV_14_ATEX_148929_X (II<br>3 G Ex ec IIC T4 Gc) |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

|   |  |                |   |
|---|--|----------------|---|
|   | CCC<br>CNEX  | CNCA-C23-01    | 2020312310000213 (Ex ec IIC T4 Gc)                |
|   | EAC<br>Brjansker Zertifizierungsstelle                     | TP TC 012/2011 | EAC RU C-DE.AM02.B.00163 /19 (2Ex nA IIC T4 Gc X) |
|   | IECEX<br>TUEV Nord Cert GmbH                               | IEC 60079-0    | IECEX TUN 14.0035 X (Ex ec IIC T4 Gc)             |
|   | INMETRO<br>TÜV Rheinland do Brasil Ltda.                   | IEC 60079-0    | BR-Ex_TÜV 12.1297 X                               |
|   | UKEx<br>WAGO GmbH & Co. KG                                 | EN 60079-0     | UKCA_WAGO22UKEX003X_ec                            |
|  | UL<br>Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS) | UL 121201      | E198726 Sec.1                                     |

## Required accessories

### Pluggable connector

Male connector/plug



Item no.: 753-110  
Plug

[www.wago.com/753-110](http://www.wago.com/753-110)

## Optional accessories

### Shield termination

Shield clamping saddles



Item no.: 790-116  
Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm

[www.wago.com/790-116](http://www.wago.com/790-116)



Item no.: 790-124  
Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm
















[www.wago.com/790-124](http://www.wago.com/790-124)



Item no.: 790-108  
Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm


[www.wago.com/790-108](http://www.wago.com/790-108)

Subject to changes. Please also observe the further product documentation!

|  |  |  |
|--|--|--|
|    | <b>Item no.: 790-140</b><br>Shield clamping saddle; diameter of compatible conductor   | <a href="http://www.wago.com/790-140">www.wago.com/790-140</a> |
|    | <b>Item no.: 790-216</b><br>Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm  | <a href="http://www.wago.com/790-216">www.wago.com/790-216</a> |
|    | <b>Item no.: 790-220</b><br>Shield clamping saddle; 30 mm wide; 6 ... 20 mm  | <a href="http://www.wago.com/790-220">www.wago.com/790-220</a> |
|    | <b>Item no.: 790-208</b><br>Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm   | <a href="http://www.wago.com/790-208">www.wago.com/790-208</a> |
| <b>Carrier rail</b>  |  |  |
| Mounting accessories   |  |  |
|    | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored                     | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a> |
|    | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored                | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a> |
|    | <b>Item no.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored        | <a href="http://www.wago.com/210-504">www.wago.com/210-504</a> |
|   | <b>Item no.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored      | <a href="http://www.wago.com/210-505">www.wago.com/210-505</a> |
|  | <b>Item no.: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored       | <a href="http://www.wago.com/210-506">www.wago.com/210-506</a> |
|  | <b>Item no.: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored         | <a href="http://www.wago.com/210-508">www.wago.com/210-508</a> |
|  | <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                  | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a> |
|  | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                 | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a> |
|  | <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored | <a href="http://www.wago.com/210-112">www.wago.com/210-112</a> |
|  | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored                   | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a> |
|  | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored | <a href="http://www.wago.com/210-115">www.wago.com/210-115</a> |

Subject to changes. Please also observe the further product documentation!





**Item no.: 210-196**

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-196](http://www.wago.com/210-196)

**Pluggable connector**

Coding



**Item no.: 753-150**

753 Series coding elements

[www.wago.com/753-150](http://www.wago.com/753-150)

**System housing**

System enclosure



**Item no.: 850-814/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate

[www.wago.com/850-814/002-000](http://www.wago.com/850-814/002-000)



**Item no.: 850-815/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate

[www.wago.com/850-815/002-000](http://www.wago.com/850-815/002-000)



**Item no.: 850-816/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate

[www.wago.com/850-816/002-000](http://www.wago.com/850-816/002-000)



**Item no.: 850-817/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate

[www.wago.com/850-817/002-000](http://www.wago.com/850-817/002-000)



**Item no.: 850-825**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20

[www.wago.com/850-825](http://www.wago.com/850-825)



**Item no.: 850-826**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826](http://www.wago.com/850-826)



**Item no.: 850-827**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827](http://www.wago.com/850-827)



**Item no.: 850-827/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827/002-000](http://www.wago.com/850-827/002-000)



**Item no.: 850-826/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826/002-000](http://www.wago.com/850-826/002-000)



**Item no.: 850-828/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828/002-000](http://www.wago.com/850-828/002-000)

**Item no.: 850-828**

Subject to changes. Please also observe the further product documentation!



IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip [www.wago.com/850-828](http://www.wago.com/850-828)



**Item no.: 850-834**  
IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20 [www.wago.com/850-834](http://www.wago.com/850-834)



**Item no.: 850-835**  
IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip [www.wago.com/850-835](http://www.wago.com/850-835)



**Item no.: 850-836**  
IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip [www.wago.com/850-836](http://www.wago.com/850-836)

### Marking accessories

#### Marker carrier



**Item no.: 750-103**  
Group marker carrier [www.wago.com/750-103](http://www.wago.com/750-103)

#### Marker



**Item no.: 2009-145/000-006**  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue [www.wago.com/2009-145/000-006](http://www.wago.com/2009-145/000-006)



**Item no.: 2009-145**  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white [www.wago.com/2009-145](http://www.wago.com/2009-145)



**Item no.: 2009-145/000-002**  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow [www.wago.com/2009-145/000-002](http://www.wago.com/2009-145/000-002)



**Item no.: 2009-145/000-007**  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray [www.wago.com/2009-145/000-007](http://www.wago.com/2009-145/000-007)



**Item no.: 2009-145/000-005**  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red [www.wago.com/2009-145/000-005](http://www.wago.com/2009-145/000-005)



**Item no.: 2009-145/000-012**  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange [www.wago.com/2009-145/000-012](http://www.wago.com/2009-145/000-012)



**Item no.: 2009-145/000-023**  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green [www.wago.com/2009-145/000-023](http://www.wago.com/2009-145/000-023)



**Item no.: 2009-145/000-024**  
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet [www.wago.com/2009-145/000-024](http://www.wago.com/2009-145/000-024)

Subject to changes. Please also observe the further product documentation!



**Item no.: 248-501/000-006**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/248-501/000-006](http://www.wago.com/248-501/000-006)



**Item no.: 248-501/000-007**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/248-501/000-007](http://www.wago.com/248-501/000-007)



**Item no.: 248-501/000-002**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/248-501/000-002](http://www.wago.com/248-501/000-002)



**Item no.: 248-501/000-012**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/248-501/000-012](http://www.wago.com/248-501/000-012)



**Item no.: 248-501**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/248-501](http://www.wago.com/248-501)



**Item no.: 248-501/000-017**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/248-501/000-017](http://www.wago.com/248-501/000-017)




**Item no.: 248-501/000-005**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)



**Item no.: 248-501/000-024**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)



**Item no.: 248-501/000-023**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/248-501/000-023](http://www.wago.com/248-501/000-023)



**Item no.: 750-100**  
Marker card; as a DIN A4 sheet; plain

[www.wago.com/750-100](http://www.wago.com/750-100)

Group marker carrier



**Item no.: 750-106**  
Group marker carrier

[www.wago.com/750-106](http://www.wago.com/750-106)

Subject to changes. Please also observe the further product documentation!



## Downloads

### Documentation

#### Manual

|  |                       |                 |          |
|--|-----------------------|-----------------|----------|
| System Manual WAGO I/O System 750/753<br>Decentralized Automation Technology | V 3.3.0<br>2023 May 4 | pdf<br>8.8 MB   | Download |
| Product Manual 2-channel, 0-20mA<br>Differential measuring input             | V 1.0.2               | pdf<br>333.5 kB | Download |
| System Manual Series 750/753<br>Online HTML                                  |                       | URL             | Download |

#### Bid Text

|                        |             |                |          |
|------------------------|-------------|----------------|----------|
| 753-480<br>X81 - Datei | 2019 Feb 19 | xml<br>5.3 kB  | Download |
| 753-480<br>doc - Datei | 2017 Oct 17 | doc<br>31.2 kB | Download |

#### Instruction Leaflet

|  |             |                 |          |
|--|-------------|-----------------|----------|
| CCC Ex (Additional information)<br>WAGO-I/O-SYSTEM *750-****/* | 2023 Apr 26 | pdf<br>163.6 kB | Download |
|--|-------------|-----------------|----------|

#### System Description

|   |  |                 |          |
|---|--|-----------------|----------|
| Overview on WAGO-I/O-SYSTEM 750 approvals               |  | pdf<br>789.0 kB | Download |
| 750/753 Series I/O-System – General Product Information |  | pdf<br>1.7 MB   | Download |

#### Additional Information

|   |                        |               |          |
|---|------------------------|---------------|----------|
| Disposal and Recycling<br>Electrical and electronic equipment, Batteries, Packaging | V 1.1.0<br>2022 Aug 18 | pdf<br>2.2 MB | Download |
|---|------------------------|---------------|----------|

## CAD/CAE-Data

### CAD data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



2D/3D Models 753-480

[URL](#)

[Download](#)

#### CAE data

EPLAN Data Portal 753-480

[URL](#)

[Download](#)

WSCAD Universe 753-480

[URL](#)

[Download](#)

ZUKEN Portal 753-480

[URL](#)

[Download](#)

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 753-480

[URL](#)

[Download](#)

2-channel analog input; 0 ... 20 mA; Differential input

### Installation Notes

### Product family

**WAGO I/O System 750/753**

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.