


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A $\pm .03$	W $\pm .01$	C $\pm .02$	M $\pm .03$	H $\pm .01$
P10-5SLF	#5	.60 (15.24)	.25 (6.35)	.19 (4.83)	.48 (12.19)	.12 (3.05)
P10-6SLF	#6	.60 (15.24)	.25 (6.35)	.19 (4.83)	.48 (12.19)	.14 (3.56)
P10-8SLF	#8	.66 (16.76)	.29 (7.37)	.23 (5.84)	.53 (13.46)	.16 (4.06)
P10-10SLF	#10	.67 (17.02)	.33 (8.38)	.23 (5.84)	.53 (13.46)	.19 (4.83)
P10-14SLF	1/4"	.76 (19.30)	.45 (11.43)	.28 (7.11)	.59 (14.99)	.25 (6.35)

NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
  - #14-10 AWG SOLID OR STRANDED COPPER WIRE
  - 302° F (150° C) MAX. TEMP. RATING
- MATERIAL:
  - STAMPING - .04" (1.02) THK COPPER, TIN PLATED
- PACKAGE QTY: STD. PKG. NOT AVAILABLE  
BULK PKG. -D=500
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- INSTALLATION TOOLS:
  - UL LISTED AND CSA CERTIFIED: CT-100, CT-200, CT-570, CT-1570
  - PANDUIT APPROVED: CT-160, CT-260
- WIRE STRIP LENGTH: 9/32  $\pm 1/32$  (7.1  $\pm .8$ )

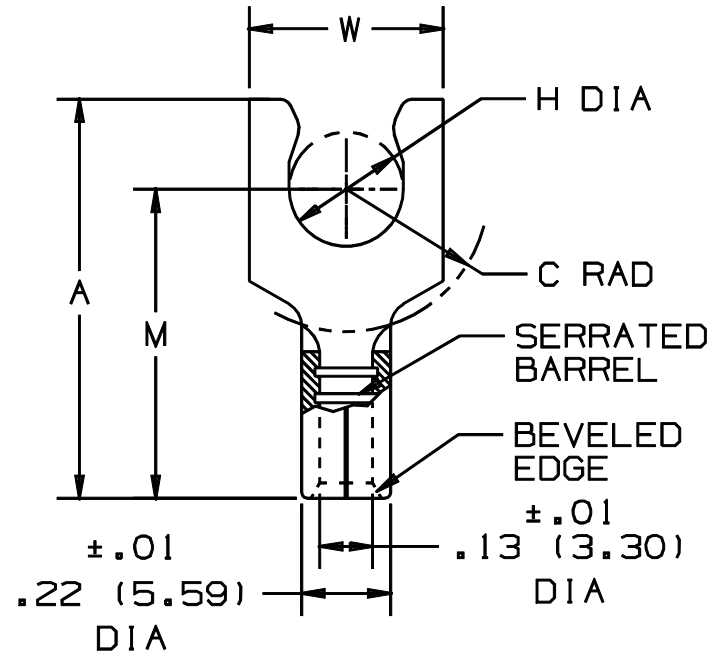

LISTED  
587H  
E52164



CERTIFIED  
LR31212

A41244\_04

04	1/01	KMD		CAD FILE SPEC. WAS N41244AA_PCD_03				<p>TINLEY PARK, ILLINOIS</p> <p>#12-10 BARREL NON-INSULATED SHORT LOCKING FORK</p>
03	5/99	JKD		ADDED CT-1570 TOOL	07632			
02	10/94	TH	RLS	UPDATED NOTES AND DIMENSIONS	02556	LCA	KS	
01	7-88	DW		REDRAWN WITH REVISIONS		JRB		
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY: DAW Ck'D: RLS SCALE: NONE DRAWING NO.: A41244