


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER


ORIGINAL

(1)

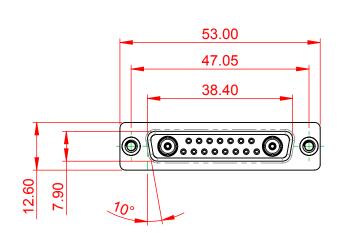




NOTES:



MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING


OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

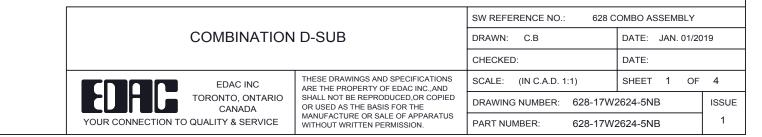



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

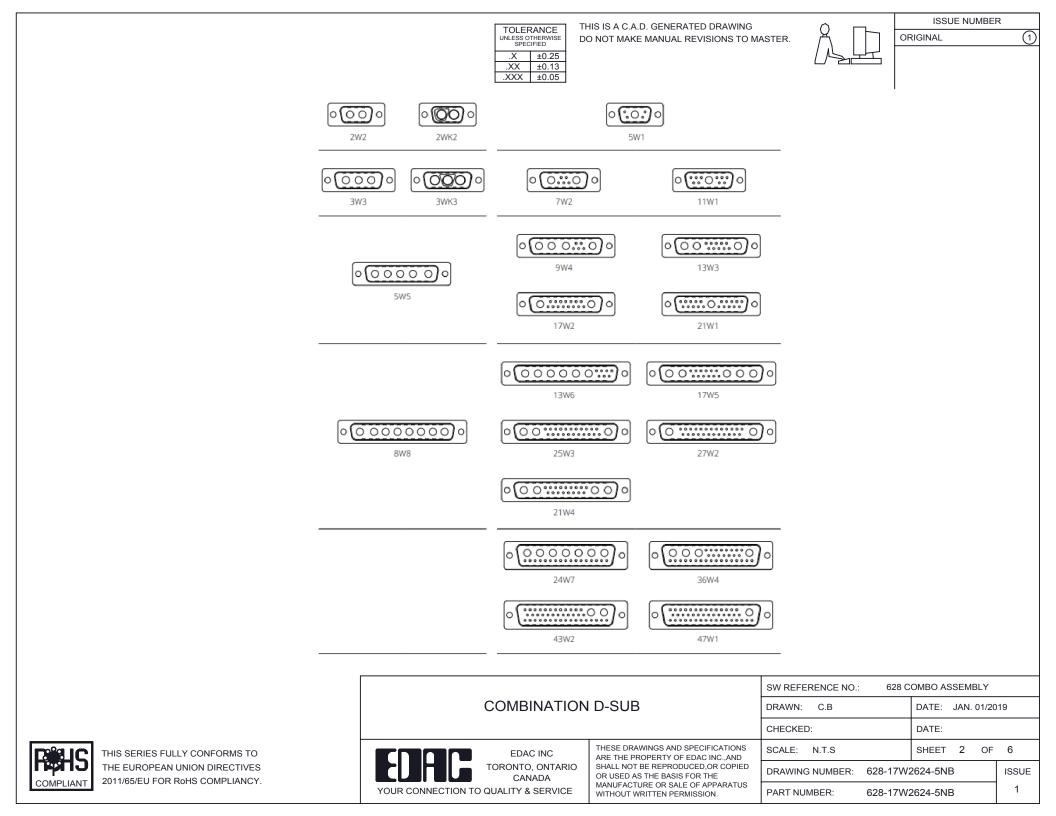

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05



(1)

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





21W4 Male/Female



27W2 Male/Female





628-17W2624-5NB

4


ISSUE

1

31.76 17W2 Male/Female 21W1 Male/Female CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2 628 COMBO ASSEMBLY SW REFERENCE NO .: C.B DATE: JAN. 01/2019 DATE: N.T.S SHEET 3 OF 628-17W2624-5NB NUMBER:


5W5 Male


5W5 Female




23.53

8W8 Male





11W1 Male/Female







THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.


| COMBINATION D-SUB | | | | C.B | |
|--------------------------------------|----------------------------|--|--------------|-------|--|
| | | | CHECKED: | | |
| | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND | SCALE: | N.T.S | |
| | TORONTO, ONTARIO CANADA | SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE | DRAWING NUMB | | |
| YOUR CONNECTION TO QUALITY & SERVICE | | MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | PART NUMBER: | | |





8W8 Female





 TOLERANCE
 THIS IS A C.A.D. GENERATED DRAWING

 UNLESS OTHERWISE
 DO NOT MAKE MANUAL REVISIONS TO MASTER.

 .X
 ±0.25





9W4 Male



25W3 Male



47.00 23.53 23.53 47.00 9.70 14.51 9.32 14.51 9.32 14.51 9.70 14.51 9.70 14.51 9.70 14.51 9.70 9.



36W4 Female



13W3 Male





51.00 30.50 13.72 16.62 5.74 15.24 1





13W6 Male



43W2 Male





.XX ±0.13 .XXX ±0.05

9W4 Female

13W3 Female



43W2 Female

47W1 Female




17W5 Male






2.77







| | COMBINATION D-SUB | | SW REFERENCE NO.: 628 COMBO ASSEMBLY | | |
|--|--------------------------------------|---|--------------------------------------|------------------|-------|
| | | | DRAWN: C.B | DATE: JAN. 01/20 | 19 |
| | | | CHECKED: | DATE: | |
| LLY CONFORMS TO | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND | SCALE: N.T.S | SHEET 4 OF | 4 |
| I UNION DIRECTIVES RoHS COMPLIANCY. | YOUR CONNECTION TO QUALITY & SERVICE | SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 628-17W2624-5NB | | ISSUE |
| | | | PART NUMBER: 628-17W | 2624-5NB | 1 |



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR R₀HS COMPLIANCY.