

New Type

MATERIAL

Insulator : PBT+30% Glass fiber UL94-V0

Contact Pin : Brass

Plating : Gold Flash

SPECIFICATION




Current Rate : 3 AMP Δ

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : 500V AC for one minute

Operation Temperature : -55°C to +105°C

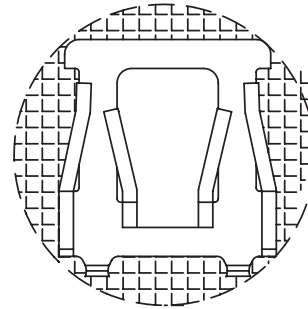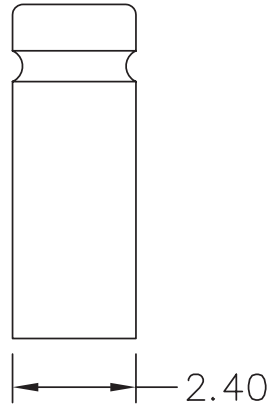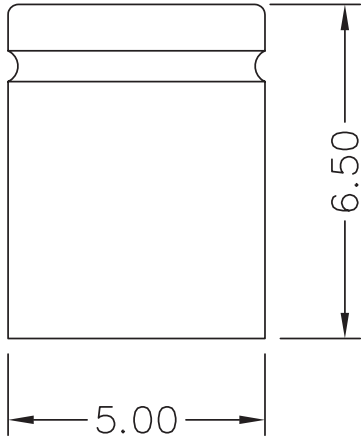

Old Type



P/N: 09200-71-BAGB00

Tolerance
unless otherwise specified

mm

.0 \pm .30

.00 \pm .20

.000 \pm .XXX

angles \pm 3°

Desc.: Mini Jumper, 2.54mm, closed, 6.50mm height, black

Date: 2-10-20

Dimensions in mm