

5

4

3

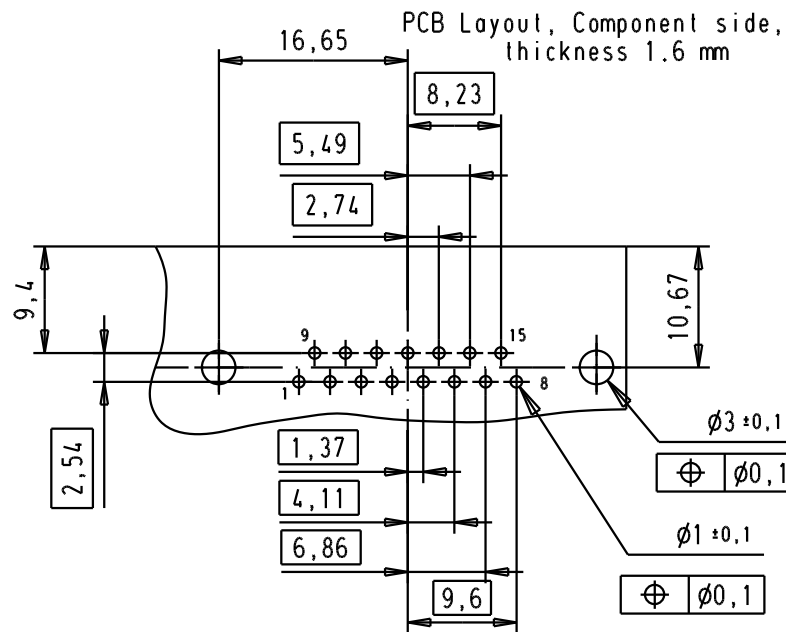
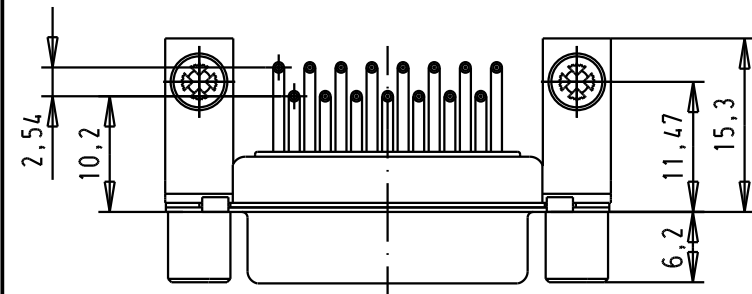
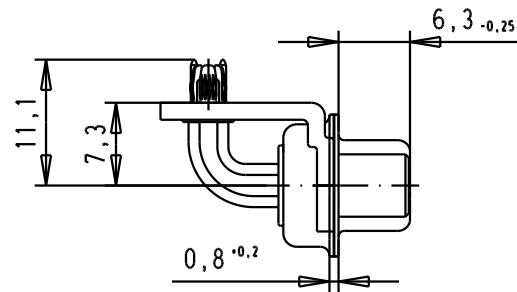
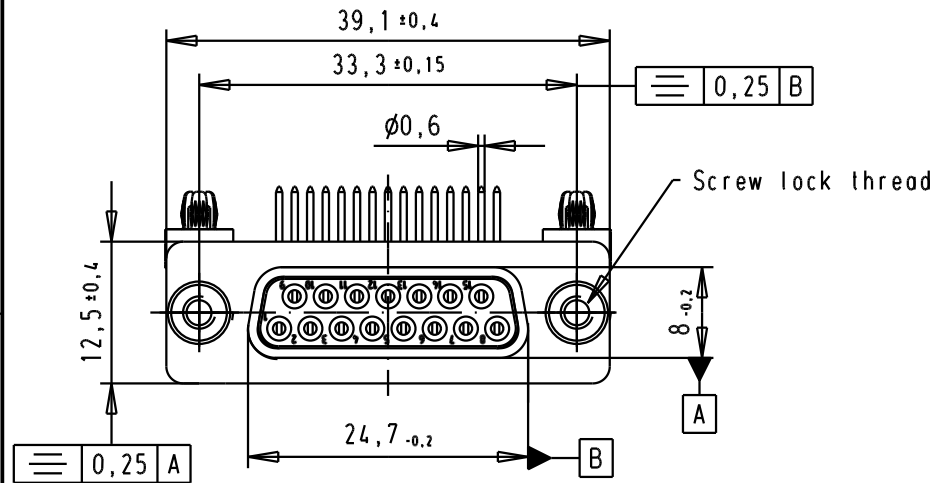
2



1

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	1000pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB



				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, female, angled, 15 Poles, turned solder pins, tin plated shell with brackets, board-locks and screw-locks	Mo?Mstab/ Scale 1.5:1	
				Detail.	8-JUL-02				CV
				Insp.					
				Stand.					
33262	15/11/05	JMDR							
32248	28/10/04	TR							
31058	8-JUL-02	CV							
Mod.	Dat.	Name	HARTING EURL F-95972 Paris				TB 0964214723x	Blatt/ Page 2 / 4	
09642147235	M3						Sub.		
09642147234	UNC 4-40								
Part number	Screw lock thread								

D

C

B

A