


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01	RELEASED	9/20/96	<i>[Signature]</i>

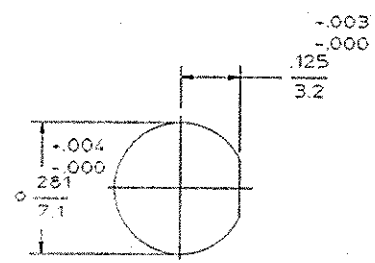

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 310-2	Temperature Rating -25 TO 125°C
Frequency Range (GHz) DC to 18	Recommended Mating Torque 7-10 IN-LBS	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) @ Sea Level 500	Mating Characteristics	Shock MIL-STD-202, Method 213, Condition I
VSWR 1.05 + 0.0F(1GHz)	Insertion (MAX Lbs) 2	Thermal Shock MIL-STD-202, Method 107, Condition B
Insertion Loss (dB MAX) .02 (1GHz)	Withdrawal (MIN Oz) 1	Except High Temp 115°C
RF Leakage (dB MIN) -90	Force to Engage and Disengage (IN-Lbs MAX) 2	Moisture Resistance MIL-STD-202, Method 106
Corona, 20,000 Ft (VRMS MIN) 375	Center Contact Captivation	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Dielectric Withstanding Voltage (VRMS MIN @ Sea Level) 1,500	Axial (Lbs) 6	
Contact Resistance (Milliohms MAX)	Radiat (in-Oz) N/A	
Center Contact 3.0	Cable Retention	
Outer Contact 2.0	Axial Force (Lbs) 60	
Cable to Housing .05	Torque (in-Oz) 55	
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 1,000	Weight (Grams) TBD	
IR (Megohms MIN) 5,000		

COMPONENT	MATERIAL	FINISH
HOUSING MOUNTING NUT LOCKWASHER CLAMP NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER 00-P-35
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
SLEEVE	BRASS PER ASTM-B-16, HALF HARD	GOLD PLATE PER MIL-G-45204
O-RING	SILICONE RUBBER PER ZZ-R-765	N/A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

FRAC	DEC	ANGLES
1/64	.005	1°

These drawings and specifications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of (items) without written permission.

USE ASSY PROCEDURE
NO. AP 20-560

DRAWN BY K. LE DATE 8-22-96
 CHECKED BY
 APP'D BY *[Signature]* 9/20/96

M/A COM
an AMP company

M/A-COM, Inc.
Waltham, MA 02254

TITLE "OSM" BULKHEAD FEEDTHRU CABLE JACK-SOLDER CLAMP ATTACHMENT

SIZE B	CODE IDENT NO. 26805	2004-8008-92	REV 01
--------	----------------------	--------------	--------

SCALE 4:1 SHEET 1 OF 1

Tyco Customer P/N 1051029
 Sheet 1 of 1
 Rev 0