



.XX ±0.13


.XXX ±0.05





(1)

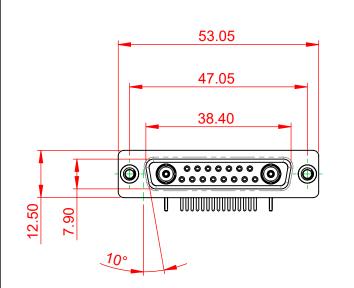




NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, U STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATE	
OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	75Ω (IMPEDANCE)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT	N
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.	
INSULATOR RESISTANCE:	5000MΩ min.	00000

DIELECTRIC WITHSTANDING VOLTAGE:



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
COMBINATION			DATE: JAN. 01/20	19	
			DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-17W2	2640-7N2	ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-17W2	2640-7N2	1	

1000V AC rms





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

