

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25

10.70

.XX ±0.13

.XXX ±0.05



**ISSUE NUMBER** 

ORIGINAL


(1)

5.80 11.94 2.54

## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ GOLD PLATED

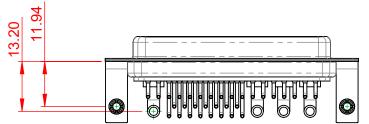


OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.

**INSULATOR RESISTANCE:** DIELECTRIC

WITHSTANDING VOLTAGE:

1000V AC rms

5000MΩ min.



		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
	-		DRAWN: C.B	DATE: JAN. 01/201	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
YOUR CONNECTION	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-36W4640-3T3		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-36W4	4640-3T3	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

