
Ŧ	Ω	н т (m	<u>о</u>





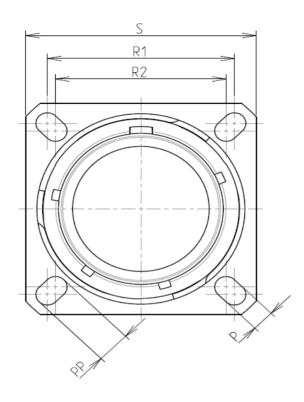

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C

: 500 hours

8D 0

G

21

Κ

42

Ρ


F

D

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 31.75 R1 29.36 R2 S 39.7±0.3 V 20.07+0/-1.25 W 2.1/3.2 31.5 Max Ζ VV THREAD M31x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

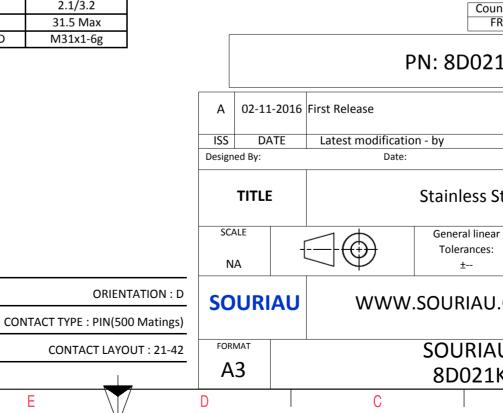

	Φ		A					
					4			
AS EXAM	APLE				3			
which er of the idation untry R	does not con e Parties or b , technical no	y a third par			2			
		CUSTOME	R DRAWING	MOD N°				
Steel	Steel Receptacle 8D series							
ar			[′] PROJECT 59		1			
J.COI	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
	RG N° PD-C			SHEET				
.1.42	B		A	_, _	J			
	_	,						

	т	۵	н т	т	D		0	
		Contact Layout					Ра	nel Cutou
		42				SQUARE FLANGE RE REAR M	CEPTACLE (TYPE 0) OUNTING 1	
4								2
	Ctc	2#4 Power 21-42 X Y						т
	A B	0 6.19 0 -6.19					ØA_	<u> </u>
ω							Dim ØA ØAA	
							R1 ØT	
	_							
	3					due the Spec	AU shall not be liab to a use of the Pro ifications issued by (professional reco	oducts wh / either of
2								Country FR
						PN: 8D02		0021k
					ISS		odification - by	
						igned By: Date: TITLE Stainless S		ess Ste
_					SCALE		H) Toler	al linear ances: ±
						OURIAU WWW.SOURIA		
					FORMA A3			RIAU 021K4
	Н	G	F	E	D		С	

