


Tolerances 1-20= \pm 0.2 20-30= \pm 0.3 30-40= \pm 0.4 40-50= \pm 0.5 50-100= \pm 0.75 100-300= \pm 1.5 Angles= \pm 1 Dimensions are In Millimeters	Revisions	Approved	Date
	Description/Approved/Date	M.H.	11.18.1995
		Checked	Date
		M.H.	11.18.1995
		Drawn	Date
		K.R.E.	11.18.1995
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike			

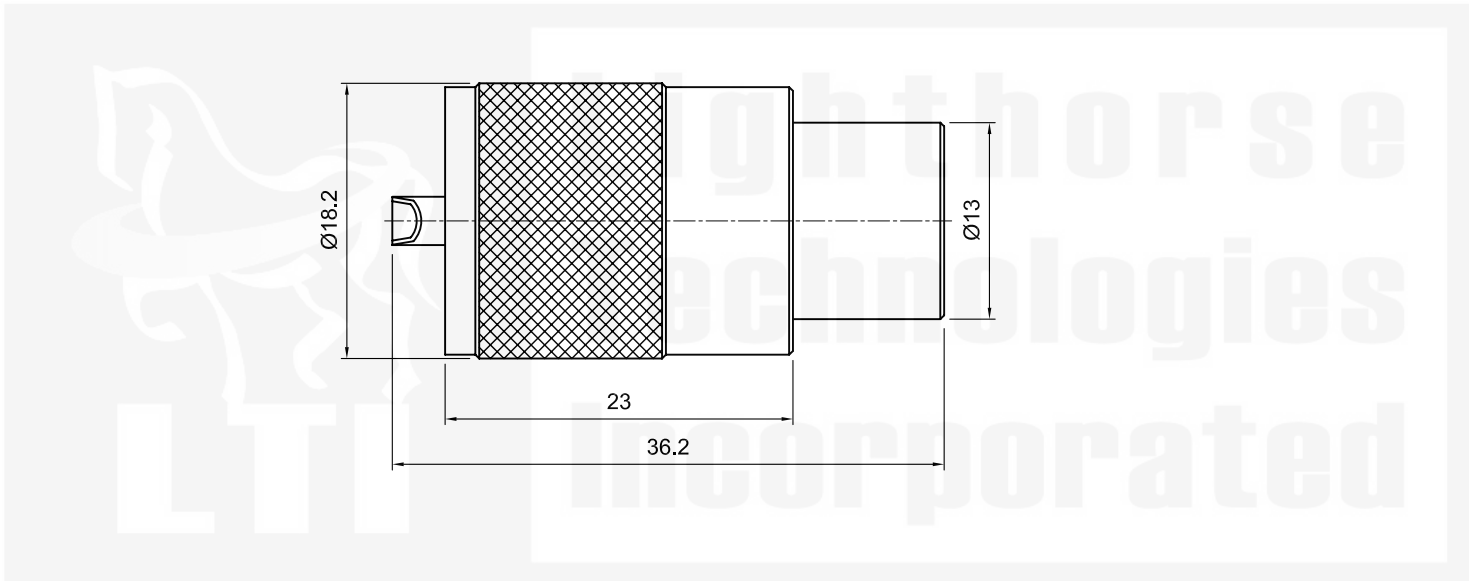

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Nickel , Note 8
Center Contact: M	Brass, Note 1	Nickel, Note 8
Insulation	Delrin	None
Ferrule	--	--
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--

 Lighthouse Technologies, Inc. 9511 Ridgehaven Ct. Ste. B San Diego, California 92123 Part Number: USM2t1ND-213	Description	
	UHF Plug, Twist On, PL 259, for RG 8, 213, LMR 400 cable.	
Scale	Drawing No.	File Name
2:1	USM2t1ND-213	USM2t1ND-213